

Permit

Environmental Protection Act 1994

Environmental Authority EPML00417213 Kogan Creek Coal Mine

This environmental authority is issued by the administering authority under Chapter 5 of the Environmental Protection Act 1994.

Environmental authority number: EPML00417213

Environmental authority takes effect on 23 June 2026.

The anniversary date of this environmental authority is 29 July each year.

Environmental authority holder(s)

Name(s)	Registered address
Aberdare Collieries Proprietary Limited	Level 2, North Tower, 540 Wickham Street, Fortitude Valley QLD 4006

Environmentally relevant activity and location details

Environmentally relevant activity/activities	Location(s)
Schedule 3 13: Mining black coal	ML50074

Additional information for applicants

Environmentally relevant activities

The description of any environmentally relevant activity (ERA) for which an environmental authority (EA) is issued is a restatement of the ERA as defined by legislation at the time the EA is issued. Where there is any inconsistency between that description of an ERA and the conditions stated by an EA as to the scale, intensity or manner of carrying out an ERA, the conditions prevail to the extent of the inconsistency.

An EA authorises the carrying out of an ERA and does not authorise any environmental harm unless a condition stated by the EA specifically authorises environmental harm.

A person carrying out an ERA must also be a registered suitable operator under the *Environmental Protection Act 1994* (EP Act).

Mobile and temporary activities

If you operate a mobile and temporary ERA, other than regulated waste transport, you are required to maintain a work diary. You must:

- use the approved form for a work diary (ESR/2015/1696);
- keep the work diary records for 2 years after the last entry;

- inform the administering authority within 7 days of the work diary being lost or stolen;
- record the information required in the work diary for each location within 1 day of leaving the location.

Contaminated land

It is a requirement of the EP Act that an owner or occupier of land give written notice to the administering authority if they become aware of the following:

- the presence of, or happening of an event involving, a hazardous contaminant on the land that is causing, or is reasonably likely to cause, serious or material environmental harm (notice must be given within 24 hours); or
- if the land is contaminated land – a change in the condition of the land that is causing, or is reasonably likely to cause, serious or material environmental harm (notice must be given within 24 hours); or
- a notifiable activity (as defined in Schedule 3) having been carried out, or is being carried out, on the land (notice must be given within 20 business days).

For further information, including the form for giving written notice, refer to the Queensland Government website www.qld.gov.au, using the search term 'duty to notify'.

Take effect

Please note that, in accordance with section 200(1) of the EP Act, an EA has effect:

- (a) if the authority is for a prescribed ERA and it states that it takes effect on the day nominated by the holder of the authority in a written notice given to the administering authority—on the nominated day; or
- (b) if the authority states a day or an event for it to take effect—on the stated day or when the stated event happens; or
- (c) otherwise—on the day the authority is issued.

However, in accordance with section 200(2) of the EP Act, the day that the EA takes effect may not be before:

- (a) if the authority is for a resource activity—the day the relevant tenure is granted to the applicant; or
- (b) if a development permit for a material change of use of premises under the *Planning Act 2016* is necessary for carrying out an activity that related to the authority—the day the development permit takes effect; or
- (c) if an SDA Approval under the *State Development and Public Works Organisation Act 1971* is necessary for carrying out an activity that relates to the authority—the day the approval takes effect.

If this EA takes effect when the additional authorisation takes effect, you must provide the administering authority written notice within 5 business days of receiving notification of the related additional authorisation taking effect.

If you have incorrectly claimed that an additional authorisation is not required, carrying out the ERA without the additional authorisation is not legal and could result in your prosecution for providing false or misleading information or operating without a valid EA.

Permit

Environmental Authority EPML00417213 Kogan Creek Coal Mine



Signature

23 June 2026

Date

Ben Byrd

Department of the Environment, Tourism, Science and Innovation

Delegate of the administering authority

Environmental Protection Act 1994

Enquiries:

Business Centre Coal

PO Box 3028, Emerald QLD 4720

Phone: (07) 4987 9320

Email: CRMining@des.qld.gov.au

Obligations under the *Environmental Protection Act 1994*

In addition to the requirements found in the conditions of this EA, the holder must also meet their obligations under the EP Act, and the regulations made under the EP Act. For example, the holder must comply with the following provisions of the Act:

- general environmental duty (section 319)
- duty to restore the environment (section 319C)
- duty to notify environmental harm (section 320-320G)
- offence of causing serious or material environmental harm (sections 437-439)
- offence of causing environmental nuisance (section 440)
- offence of depositing prescribed water contaminants in waters and related matters (section 440ZG)
- offence to place contaminant where environmental harm or nuisance may be caused (section 443).

Other permits required

This permit only provides an approval under the EP Act. In order to lawfully operate you may also require permits / approvals from your local government authority, other business units within the department, and other State and Federal Government agencies prior to commencing any activity at the site. For example, this may include permits or approvals with your local Council (for planning approval), the Department of Transport and Main Roads (to access State controlled roads), the Department of Natural Resources and Mines, Manufacturing, and Regional and Rural Development (to clear vegetation), and the Department of Primary Industries (to clear marine plants or to obtain a quarry material allocation).

Obligations under the *Environment Protection and Biodiversity Conservation Act 1999 (EPBC Act)*

Matters of national environmental significance (MNES) are regulated under the Commonwealth EPBC Act rather than under state legislation. You may need to submit a referral if your project potentially impacts any matters protected under the EPBC Act. For more information on self-assessments, and referral and assessment processes, please visit the Australian Government Department of Climate Change, Energy, the Environment and Water's website at www.dcceew.gov.au/environment/epbc/advice.

Obligations under the *Aboriginal Cultural Heritage Act 2003* and *Torres Strait Islander Cultural Heritage Act 2003* (the Cultural Heritage Acts)

The Cultural Heritage Acts require anyone who carries out a land-use activity to exercise a duty of care. This 'duty of care' means land users must take all reasonable and practicable measures to ensure their activity does not harm Aboriginal or Torres Strait Islander cultural heritage, and applies to any activity where Aboriginal or Torres Strait Islander cultural heritage is located. For more information on your obligations under this legislation, please visit the Department of Women, Aboriginal and Torres Strait Islander Partnerships and Multiculturalism webpage at, www.dwatsipm.qld.gov.au.

Conditions of environmental authority

Agency interest: General	
Condition number	Condition
A1	General This environmental authority authorises environmental harm referred to in the conditions. Where there is no condition or this environmental authority is silent on a matter, the lack of a condition or silence does not authorise environmental harm.
A2	Maintenance of measures, plant and equipment The environmental authority holder must: (a) install all measures, plant and equipment necessary to ensure compliance with the conditions of this environmental authority; (b) maintain such measures, plant and equipment in a proper condition; and (c) operate such measures, plant and equipment in a proper manner.
A3	Monitoring Record, compile and keep for a minimum of 5 years all monitoring results required by this environmental authority and make available for inspection all or any of these records upon request by the administering authority.
A4	Monitoring and determinations required under any condition of this environmental authority must be conducted by an appropriately qualified person(s).
A5	Storage and handling of flammable and combustible liquids Spillage of all flammable and combustible liquids must be contained within an on-site containment system and controlled in a manner that prevents environmental harm (other than trivial harm) and maintained in accordance with section 5.9 of 'AS 1940 - The storage and handling of flammable and combustible liquids'.

Agency interest: Air	
Condition number	Condition
B1	Dust Nuisance Subject to conditions B2 and B3 the release of dust or particulate matter or both resulting from the mining activity must not cause an environmental nuisance, at any sensitive place or commercial place.

B2	When requested by the administering authority, dust and particulate monitoring must be undertaken within a reasonable and practicable timeframe nominated by the administering authority to investigate any complaint (which is neither frivolous nor vexatious nor based on mistaken belief in the opinion of the authorised officer) of environmental nuisance at any sensitive place, and the results must be notified within 14 days to the administering authority following completion of monitoring.
B3	If the environmental authority holder can provide evidence through monitoring that the following limits are not being exceeded by emissions from the mining activity, then the holder is not in breach of condition B1: (a) dust deposition of 120 milligrams per square metre per day, averaged over one month, when monitored in accordance with AS /NZS 3580.10.1 'Methods for sampling and analysis of ambient air – Determination of particulate matter - Deposited matter – Gravimetric method'; and (b) a concentration of particulate matter with an aerodynamic diameter of less than 10 micrometres (μm) (PM_{10}) suspended in the atmosphere of 50 micrograms per cubic metre over a 24-hour averaging time, at a sensitive place downwind of the operational land, when monitored in accordance with: (i) particulate matter – determination of suspended particulate PM_{10} high- volume sampler with size – selective inlet – Gravimetric method, when monitored in accordance with AS 3580.9.6 'Methods for sampling and analysis of ambient air – Determination of suspended particulate matter – PM_{10} high volume sampler with size selective inlet – Gravimetric method'; or (ii) any alternative method of sampling PM_{10}, which may be permitted by the 'Air Quality Sampling Manual' as published from time to time by the administering authority. NOTE: You must propose which monitoring method is appropriate in accordance with condition B3 (a) or (b) or both.
B4	If monitoring indicates exceedance of the relevant limits in condition B3 , then the environmental authority holder must immediately implement dust abatement measures so that emissions of dust from the activity do not result in environmental nuisance; or if considered appropriate by the administering authority, undertake appropriate dispute resolution.
B5	Odour nuisance Subject to condition B6, the release of noxious or offensive odour(s) or any other noxious or offensive airborne contaminant(s) resulting from the mining activity must not cause an environmental nuisance at any sensitive place.
B6	When requested by the administering authority, odour monitoring must be undertaken within a reasonable and practicable timeframe nominated by the administering authority to investigate any complaint (which is neither frivolous nor vexatious nor based on mistaken belief in the opinion of the authorised officer) of environmental nuisance at any sensitive place, and the results must be notified within 14 days to the administering authority following completion of monitoring.
B7	If monitoring indicates condition B5 is not being met then the environmental authority holder must immediately implement odour abatement measures so that emissions of odour from the activity do not result in environmental nuisance; or if considered appropriate by the administering authority, undertake appropriate dispute resolution.

Agency interest: Water	
Condition number	Condition
C1	Contaminants must not be released to any water unless otherwise permitted by a condition of this environmental authority.
C2	Water monitoring and sampling must address and comply with the latest version of the Queensland Government's <i>'Monitoring and Sampling Manual 2018 – Environmental Protection (Water) Policy 2009'</i> (or latest version) unless otherwise approved by the administering authority.
C3	The following information must be recorded for all water monitoring: (a) the date on which the sample or in-situ record was taken; and (b) the time at which the sample or in-situ record was taken; and (c) the location co-ordinates and description of the monitoring point at which the sample was taken; and (d) the results of all monitoring; and (e) details of any exceedances of the conditions of this environmental authority.
C4	The information recorded under condition C3 must be submitted to the administering authority annually in the specified electronic format via WaTERS.
C5	The release of mine affected water to waters must only occur from the release points specified in Table C1 Mine affected water release points and receiving waters .
C6	The release of mine affected water to waters must only occur during periods of natural flow in the receiving waters at the release point as specified in Table C1 Mine affected water release points and receiving waters .

Table C1 Mine affected water release points and receiving waters

Release point	Latitude (GDA2020)	Longitude (GDA2020)	Receiving waters description
RP1	-26.92521	150.77937	Kogan Creek North (adjacent to ROM Pond)
RP2	-26.93118	150.77194	Kogan Creek West (adjacent to Dam 8)
RP3	-26.93966	150.77313	Eastern branch creek diversion

C7	Quality Characteristics of Release to Waters The quality of mine affected water in water storages must be monitored prior to, during and after a release of mine affected water to waters: (a) for all quality characteristics specified in Table C2 Release Quality Characteristic Limits; and (b) at the monitoring frequency in Table C2 Release Quality Characteristic Limits.
C8	The release of mine affected water to waters must only commence when mine affected water complies with each of the limits specified in Table C2 Release Quality Characteristic Limits in accordance with monitoring undertaken with condition C7.

Table C2 Release Quality Characteristic Limits

Quality characteristics	Release limit	Monitoring frequency		
		Prior to release	During release	After ceasing release
Oil and grease	10mg/L (maximum)	No more than 14 days	At least once in every 3 days period	Within no more than 24 hours
pH*	6.5-9.0 (as a range)	No more than 24 hours	At least once in every 3 days period	Within no more than 24 hours
Electrical conductivity (EC)*	1,800µS/cm (maximum)	No more than 24 hours	At least once in every 3 days period	Within no more than 24 hours
Suspended solids	285mg/L (maximum)	No more than 14 days	At least once in every 3 days period	Within no more than 24 hours

Table note: *in field measurement

C9	The release of mine affected water to waters must be monitored: (a) for all quality characteristics specified in Table C3 Receiving waters quality limits; and (b) at the monitoring frequency in Table C3 Receiving waters quality limits; and (c) at the monitoring points identified in Table C4 Receiving waters monitoring points.
----	--

Table C3 Receiving waters quality limits

Quality characteristic	Trigger level	Monitoring frequency
pH	6.5-9.0	No more than 24 hours prior to release, and daily during a release
Electrical conductivity (EC)	950µS/cm	No more than 24 hours prior to release, and daily during a release

Table C4 Receiving waters monitoring points

Monitoring point	Latitude (GDA2020)	Longitude (GDA2020)	Monitoring point description
MP1	-26.92457	150.77937	Smiths Road bridge over Kogan Creek

C10	Releases to waters must be undertaken so as not to cause erosion of the bed and banks of the receiving waters, or cause a material build-up of sediment in the receiving waters.
C11	Notification of release event The environmental authority holder must notify the administering authority via WaTERS as soon as practicable and no later than 24 hours after commencing to release mine affected water to the receiving environment. Notification must include the submission of written advice to the administering authority of the following information: (a) release commencement date and time; (b) details regarding compliance of the release with conditions of Agency interest: Water of this environmental authority (that is, contaminant limits, natural flow); (c) release point(s); (d) release rate; (e) release electrical conductivity (EC); (f) release pH; and (g) receiving water(s).
C12	The environmental authority holder must notify the administering authority via WaTERS as soon as practicable 24 hours after cessation of a release notified under condition C11. The cessation notification must include the following information: (a) release cessation date and time; (b) details regarding the compliance of the release with the conditions of this environmental authority (that is, contaminant limits, natural flow, discharge volume); (c) release point(s); (d) release rate; (e) release electrical conductivity (EC); (f) release pH; (g) receiving water(s); (h) the monitoring data for, electrical conductivity (EC) and pH from downstream monitoring locations; and (i) all in situ and any water quality monitoring results (including all laboratory analyses). <i>Note: Successive or intermittent releases occurring within 24 hours of the cessation of any individual release can be considered part of a single release event and do not require individual notification for the purpose of compliance with conditions C11 and C12, provided the relevant details of the release are included within the notification provided in accordance with conditions C11 and C12.</i>

C13	The environmental authority holder must provide a report to the administering authority via WaTERS within 28 days after cessation of a release event notified under condition C11. The report must include: (a) release commencement and cessation dates and times; (b) the total, and daily (24 hour) volumes of water released; (c) details regarding the compliance of the release with the conditions of this environmental authority (i.e. contamination limits, natural flow, discharge volume); (d) and in situ water quality monitoring results (including laboratory analyses); and (e) any other matters pertinent to the water release event.
C14	Release of mine affected water must cease immediately if: (a) monitoring in accordance with condition C9 indicates that the water quality characteristics of mine affected water exceed whichever is the poorer quality of: (i) the triggers levels in accordance with Table C3 Receiving waters quality limits; or (ii) the results of monitoring undertaken no more than 24 hours prior to release in accordance with condition C9, or (b) monitoring during release in accordance with condition C7 indicates exceedance of the Suspended Solid or Oil and Grease limits for two consecutive laboratory analysis results. <i>Note: This condition allows for the release to continue when the pH and EC of the receiving waters at MP1 exceed the values in Table C3 Receiving waters quality limits, provided pH and EC do not exceed the values measured during monitoring at MP1 within the 24 hours prior to release. The release may continue only if monitoring continues to demonstrate that water quality at MP1 continues to be better than or the same as the pre-release receiving water quality at MP1.</i>
C15	Notification of release event exceedance If an exceedance in accordance with condition C14 occurs, the holder of the environmental authority must notify the administering authority within 24 hours of receiving the monitoring result via WaTERS.
C16	The environmental authority holder must, within 28 days of a release that is not compliant with the conditions of this environmental authority, provide a report to the administering authority via WaTERS detailing: (a) the reason for the release; (b) the location of the release; (c) the total volume of the release and which (if any) part of this volume was non-compliant; (d) the total duration of the release and which (if any) part of this period was non-compliant; (e) all water quality monitoring results (including all laboratory analyses); (f) extent of any environmental harm as a result of the non-compliance; (g) all calculations; and (h) any other matters pertinent to the water release event.

C17	Water Management Plan A Water Management Plan must be developed by an appropriately qualified person and implemented. The Water Management Plan must be made available to the administering authority on request.
C18	The Water Management Plan must identify methods to: (a) identify the environmental values of the receiving waters including Kogan Creek and water quality objectives and how they will be protected; (b) incorporate a risk management approach to how changing levels of flood, drought and water quality risks should be addressed; (c) manage stormwater discharge; (d) develop and implement a system for emergency spills or discharge including procedures to minimise extent and duration of release, staff training, investigation and reporting procedures; (e) manage the environmental impacts of any release of wastewater to the environment so that any impacts are minimised; (f) separate clean water from undisturbed areas and water from disturbed areas; (g) manage site water quality and quantity during the 3 phases of mining: development, operation and decommissioning and include a site water balance including groundwater generated through mine dewatering; (h) safeguard against the potential for soil erosion and acid drainage; and (i) provide details of operational monitoring and monitoring of hydrological processes including associated performance indicators.
C19	A copy of the Water Management Plan and any subsequent amendment of the Water Management Plan must be kept at the place to which this environmentally relevant activity relates and be available for examination by Emergency Services Personnel or an authorised person on request.

C20	Kogan Creek Water Monitoring Program A Water Monitoring Program must be developed by an appropriately qualified person and implemented. The Water Monitoring Program must: (a) be carried out by a person possessing appropriate qualifications and experience in the field of water monitoring to be able to competently make recommendations about these matters; (b) provide project guidelines for the interpretation of monitoring results to determine if environmental harm within the predicted zone of influence arising from mining activities is occurring or is likely to occur; (c) have tested parameters that shall include, but not be limited to, the following water quality characteristics: (i) total dissolved solids(mg/L); (ii) total suspended solids (mg/L); and (iii) pH. (d) monitor oils and petroleum hydrocarbons (mg/L) at water holding structures with a reasonable risk of contamination from fuel; (e) following the establishment of the background water quality, the monitoring of water quality changes and the timing of measurements should be related to proposed or actual releases; and (f) give consideration to relevant methodology and water quality criteria published jointly by the Australian and New Zealand Environment and Conservation Council (ANZECC) and the Agriculture and Resource Management Council of Australia and New Zealand: 'Australian Guidelines for water Quality Monitoring and Reporting 2000'; and 'Australian and New Zealand Guidelines for Fresh and Marine Water Quality (2000)'.
C21	A record of the monitoring results required under condition C20 including background water quality monitoring must be kept and forwarded to the administering authority on request.
C22	Groundwater Groundwater quality and levels must be monitored at the locations and frequencies defined in Table C5 Groundwater monitoring locations and frequency and Appendix 1: Groundwater monitoring locations.
C23	Groundwater draw down fluctuations in excess of 2 metres per year , not resulting from the pumping of licensed bores, must be notified to the administering authority in accordance with condition G5 .
C24	The method of sampling of groundwater must comply with the latest edition of the administering authority's 'Water Quality Sampling Manual'.
C25	Results of monitoring of groundwater quality bores identified in Table C5 Groundwater monitoring locations and frequency must not exceed any of the contaminant limits specified in Table C6 Groundwater contaminant limits for the same monitoring bore on 2 consecutive sampling occasions .
C26	If the contaminant limits specified Table C6 Groundwater contaminant limits are exceeded at the same monitoring bore on 2 consecutive sampling occasions the environmental authority holder must notify the administering authority within one business day of receiving the final analysis results.

C27	Within 14 days of notification given under conditions C23 or C25 an investigation must commence to determine if the exceedance is a result of: (a) mining activities authorised under this environmental authority; or (b) seasonal/natural variation; or (c) any other potential cause.
C28	If the investigation under condition C27 determines that the exceedance was caused by the mining activities, authorised under this environmental authority, then a further investigation must be completed within 3 months after completing the investigation under condition C27, or a time period agreed to by the administering authority. This investigation must determine whether environmental harm has occurred or may occur, and the extent thereof.
C29	If the investigation undertaken under condition C28 determines that environmental harm has occurred, or may occur, the following actions must be taken within 28 days after completing the investigation under condition C28: (a) implementation of measures to reduce environmental harm including potential environmental harm; and (b) development of long-term mitigation measures to address any existing groundwater contamination and prevent recurrence of groundwater contamination which is implemented in a reasonable time period; and (c) if environmental harm has occurred as a result of groundwater drawdown exceedances: (i) determine and implement any reasonably practicable actions required to reduce the potential for environmental harm; and (ii) determine and implement any reasonably practicable mitigation measures required to limit the drawdown in the affected groundwater resource. (d) provide a report that documents the steps taken under condition C29 (a), (b), and (c), and provide the documentation to the administering authority.
C30	The following information must be recorded in relation to all groundwater sampling: (a) date on which the sample was taken; (b) time at which the sample was taken; (c) monitoring point at which the sample was taken; and (d) results of all monitoring.
C31	Bore construction and maintenance and decommissioning The construction, maintenance and management of groundwater bores (including groundwater monitoring bores) must be undertaken in a manner that prevents or minimises impacts to the environment and ensures the integrity of the bores to obtain accurate monitoring.
C32	Records of groundwater baseline monitoring results must be kept and submitted to the administering authority upon request.

Table C5 Groundwater monitoring locations and frequency

Monitoring Point	GDA2020 ¹		Aquifer	Ground Level Surface AHD ² (m)	Total Depth (m) ³	Frequency	
	Latitude	Longitude				Water Quality	Standing Water Level
MB1	-26.92063	150.79060	Condamine Alluvium	310.801	15.25	Quarterly	Quarterly
MB3	-26.92557	150.78000	Kogan Creek Alluvium	310.558	15.043		
MB8	-26.91912	150.78055	Kogan Creek Alluvium	311.593	14.147		
MB7-R	-26.94438	150.77033	Walloon Coal Measures	320.307	73.448	Six Monthly	
MB9	-26.93830	150.74650	Springbok Sandstone	314.852	22.553		
MB10-R	-26.93898	150.74993	Springbok Sandstone	315.849	29.849		
MB25	-26.92719	150.77913	Walloon Coal Measures	308.646	43.338		
MB26	-26.93428	150.79920	Walloon Coal Measures	310.840	45.0		
MB27	-26.93898	150.80432	Walloon Coal Measures	317.000	45.0		
MB30	-26.93453	150.77461	Walloon Coal Measures	309.834	44.215		
MB31	-26.95844	150.79262	Walloon Coal Measures	320.503	74.0		

Table notes:

1. Geocentric Datum of Australia 2020 (GDA2020)
2. Australian Height Datum
3. Below ground level.

Table C6 Groundwater contaminant limits

Bore	Parameter	pH	EC	Sulfate	Arsenic	Molybdenum	Selenium	Boron	Major ions
	Sample	Range	Max	Max	Max	Max	Max	Max	Interpretation only
	Unit	pH units	µS/cm	mg/L	mg/L	mg/L	mg/L	mg/L	N/A
MB1		6.0 – 8.0 ^A	1,208 ^B	38 ^B	0.013 ^D	0.034 ^D	0.011 ^D	0.94 ^D	Sodium and Chloride
MB7-R		6.5 - 8.5 ^C	10,595 ^B	4.0 ^B					
MB9			14,340 ^B	944 ^B					
MB10-R			18,480 ^B	1,296 ^B					
MB25			3,123 ^B	1.0 ^B					
MB26			4,005 ^B	5.0 ^B					
MB27			2,306 ^B	264 ^B					
MB30			13,960 ^B	181.0 ^B					
MB31			5,555 ^B	3.0 ^B					
MB3		Typically, dry: Interpretation only when water is present							
MB8									

Table notes:

- A. Bore specific value
- B. Bore specific 95th percentile
- C. Condamine River Basin Environmental Values and Water Quality Objectives
- D. *Australian Water Quality Guidelines* (NRMMC 2011).

C33	Erosion and Sediment Control All reasonable and practicable measures must be implemented and maintained to minimise erosion and the release of sediment.
C34	Erosion protection measures and sediment control must be provided and maintained to effectively minimise any likelihood of erosion and release of sediments from the licensed place and be maintained during site clearing, construction, mining operations and rehabilitation. Such measures should include diversion drainage works and sedimentation traps and dams.
C35	Erosion control and sediment control structures must be maintained at all times and repaired or replaced as required after each rainfall event.

C36	Sewage effluent All effluent released from the treatment plant must be monitored at the frequency and for the parameters specified in Table C7 Sewage effluent quality targets for irrigation to land excluding dust suppression.
-----	---

Table C7 Sewage effluent quality targets for irrigation to land excluding dust suppression

Quality Characteristics	Release limit	Units	Limit type	Monitoring frequency
5-day Biochemical Oxygen Demand (uninhibited)	<20	mg/L	max	Monthly
pH	6.5 - 8.5	pH units	range	Monthly
Faecal Coliforms	<10,000CFU (colony forming units)	Colonies per 100mL	max	Monthly

C37	Sewage effluent irrigated must not exceed sewage effluent release limits defined in Table C7 Sewage effluent quality targets for irrigation to land excluding dust suppression .
C38	Sewage effluent used for irrigation must not cause spray drift or over spray to any sensitive or commercial place.
C39	Subject to conditions C37 and C38 , sewage effluent from sewage treatment facilities must be reused or evaporated and must not be directly released from the sewage treatment plant to any water way or drainage line.
C40	Reuse of mine affected water Mine affected water may be piped or trucked or transferred (transferred water) from mine affected water storages within ML50074 and deposited into artificial water storage structures, or used directly, in any manner that does not otherwise contravene the conditions of this environmental authority: (a) at the Kogan Creek Power Station for the activities authorised under environmental authority EPPR00918113; or, (b) on ash cells authorised under environmental authority BRID0033 for construction, closure and rehabilitation activities.
C41	The re-use of mine affected water (transferred water) under condition C40 is subject to consent of the holder(s) of environmental authority EPPR00918113 and BRID0033.
C42	Information about the transferred water must be recorded and be made available to the administering authority on request in a report, including: (a) the quantity (volume) of water transferred. (b) date(s) of the transfer.

C43	The mine affected water transferred for reuse under condition C40 must not be released directly to, or supplied indirectly via, a stream, river, weir, or any other watercourse.
-----	---

Agency interest: Acoustic	
Condition number	Condition
D1	Noise Nuisance Subject to conditions D2 and D3, noise from the mining activity must not cause an environmental nuisance, at any sensitive or commercial place.
D2	When requested by the administering authority, noise monitoring must be undertaken within a reasonable and practicable timeframe nominated by the administering authority to investigate any complaint (which is neither frivolous nor vexatious nor based on mistaken belief in the opinion of the authorised officer) of environmental nuisance at any sensitive place, and the results must be notified within 14 days to the administering authority following completion of monitoring.
D3	If the environmental authority holder can provide evidence through monitoring that the limits defined in Table D1 Noise limits, Table D2 Airblast overpressure level - 'Sensitive place', and Table D3 Vibration limits - 'Sensitive place' inclusive are not being exceeded by the noise from the mining activity then the holder is not in breach of condition D1. Monitoring must include: (a) LA, max adj, T and LAr , 1 hour and LA10 , adj, 10 mins; (b) the level and frequency of occurrence of impulsive or tonal noise; (c) atmospheric conditions including wind speed and direction; (d) location, date and time of recording; and (e) extraneous noise sources such as traffic noise.

Table D1 Noise limits

Noise level dB(A) measured as:	Monday to Saturday			Sundays and public holidays		
	7am - 6pm	6pm - 10pm	10pm - 7am	9am - 6pm	6pm - 10pm	10pm - 9am
	Noise measured at a 'Noise sensitive place'					
LAr, 1 hour	50	45	40	50	45	40
	Noise measured at a 'Commercial place'					
LA10, adj, 10 mins	55	50	45	55	50	45

Table D2 Airblast overpressure level – ‘Sensitive place’

Noise parameter	Monday to Friday 9am - 5.30pm	Sundays and public holidays
	Saturday 9am - 1pm	
Airblast overpressure level (dB linear peak)	115db (80th percentile)	Nil unless required under the <i>Coal Mining Safety and Health Regulation 2001</i> .
Air blast overpressure level (dB linear peak)	120db (maximum)	

Table D3 Vibration limits – ‘Sensitive place’

Vibration parameter	Monday to Friday 9am – 5.30pm	Sundays and public holidays
	Saturday 9am - 1pm	
Houses and low rise residential buildings and commercial buildings not included below.	10mm/s peak particle velocity.	Nil unless required under the <i>Coal Mining Safety and Health Regulation 2001</i> .
Commercial and industrial buildings or structures of reinforced concrete or steel construction.	25mm/s peak particle velocity.	

D4	If monitoring indicates exceedance of the limits in Table D1 Noise limits , then the environmental authority holder must immediately implement noise abatement measures so that emissions of noise from the activity do not result in environmental nuisance or if considered appropriate by the administering authority, undertake appropriate dispute resolution.
D5	The method of measurement and reporting of noise levels must comply with the latest edition of the administering authority’s ‘Noise Measurement Manual’.
D6	Vibration nuisance Subject to conditions D7 and D8 vibration from the mining activity must not cause an environmental nuisance, at any sensitive place.
D7	If the environmental authority holder can provide evidence through monitoring that the limits defined in Table D3 Vibration limits - ‘Sensitive place’ are not being exceeded then the holder is not in breach of condition D6 . Monitoring must include: (a) location of the blast(s) within the mining area (including which bench level); (b) atmospheric conditions including temperature, cloud cover and wind speed and direction; and (c) location, date and time of recording.
D8	If monitoring indicates exceedance of the relevant limits in Table D3 Vibration limits – ‘Sensitive place’ then the environmental authority holder must immediately implement vibration abatement measures so that vibration from the activity does not result in environmental nuisance or if considered appropriate by the administering authority, undertake appropriate dispute resolution.

Agency interest: Waste	
Condition number	Condition
E1	Storage of tyres Tyres stored awaiting disposal or transport for take-back and, recycling, or waste-to-energy options should be stockpiled in volumes less than 3 metres in height and 200 square metres in area and at least 10 metres from any other tyre storage area.
E2	All reasonable and practicable fire prevention measures must be implemented, including removal of grass and other materials within a 10 metres radius of the scrap tyre storage area.
E3	Disposal of tyres Where practicable, scrap tyres can be disposed of in underground stopes provided this practice does not cause an unacceptable fire risk or compromise mine safety.
E4	Disposing of scrap tyres in spoil emplacements is acceptable, provided tyres are placed as deep in the spoil as possible but not directly on the pit floor.
E5	Scrap tyres disposed within the operational land must not impede saturated aquifers and compromise the stability of the consolidated landform.

Agency interest: Land	
Condition number	Condition
F1	Progressive Rehabilitation and Closure Plan Land disturbed by mining must be rehabilitated in accordance with the approved Progressive Rehabilitation and Closure Plan (PRCP) schedule for this environmental authority.
F2	Mine overburden and cover material may be trucked or otherwise transferred and deposited and used anywhere within the boundaries of ML50074, limited to land disturbed for the activities authorised under this environmental authority or environmental authority BRID0033, in any manner that does not otherwise contravene the conditions of this environmental authority

Agency interest: Social	
Condition number	Condition
G1	Complaint response All complaints received must be recorded including details of complainant, reasons for the complaint, investigations undertaken, conclusions formed and actions taken. This information must be made available for inspection by the administering authority on request.
G2	Notification of Emergencies and Incidents As soon as practicable after becoming aware of any emergency or incident which results in the release of contaminants not in accordance, or reasonably expected to be not in accordance with the conditions of this environmental authority, the holder of this environmental authority must notify the administering authority as soon as possible.
G3	The notification of emergencies or incidents as required by condition G2 must include but not be limited to the following: (a) the holder of the environmental authority; (b) the location of the emergency or incident; (c) the number of the environmental authority; (d) the name and telephone number of the designated contact person; (e) the time of the release; (f) the time the holder of the environmental authority became aware of the release; (g) the suspected cause of the release; (h) the environmental harm and or environmental nuisance caused, threatened, or suspected to be caused by the release; and (i) actions taken to prevent any further release and mitigate any environmental harm and or environmental nuisance caused by the release.
G4	Not more than 14 days following the initial notification of an emergency or incident, the holder of the environmental authority must provide written advice of the information supplied in accordance with condition G3 in addition to: (a) proposed actions to prevent a recurrence of the emergency or incident; (b) outcomes of actions taken at the time to prevent or minimise environmental harm and or environmental nuisance; and (c) the results of any environmental monitoring performed. Note: Any notifications given under section 320 or section 350 of the <i>Environmental Protection Act 1994</i> that contains the information set out in conditions G3 and G4 is also a notification under this condition.

G5	Exception Reporting The holder of this environmental authority must notify the administering authority in writing of any monitoring result that indicates an exceedance of or non-compliance with any environmental authority limit within 28 days of the EA holder receiving the final analysis results.
G6	The written notification required by condition G5 above must include: (a) the full analysis results; (b) details of investigation or corrective actions taken; and (c) any subsequent analysis. Note: Any notifications given under section 320 or section 350 of the <i>Environmental Protection Act 1994</i> that contains the information set out in condition G3 is also a notification under this condition.

Agency interest: Regulated Structures	
Condition number	Condition
H1	Assessment of consequence category The consequence category of any structure must be assessed by a suitably qualified and experienced person in accordance with the 'Manual for assessing consequence categories and hydraulic performance of structures' (ESR/2016/1933) at the following times: (a) prior to the design and construction of the structure, if it is not an existing structure; or (b) prior to any change in its purpose or the nature of its stored contents.
H2	A consequence assessment report and certification must be prepared for each structure assessed and the report may include a consequence assessment for more than one structure.
H3	Certification must be provided by the suitably qualified and experienced person who undertook the assessment, in the form set out in the 'Manual for assessing consequence categories and hydraulic performance of structures' (ESR/2016/1933).
H4	Design and Construction¹ of a Regulated Structure Conditions H5 to H9 inclusive do not apply to existing structures.
H5	All regulated structures must be designed by, and constructed² under the supervision of, a suitably qualified and experienced person in accordance with the requirements of the 'Manual for assessing consequence categories and hydraulic performance of structures' (ESR/2016/1933). NOTE: ¹construction of a dam includes modification of an existing dam – refer to the definitions. NOTE: ²certification of design and construction may be undertaken by different persons.

H6	Construction of a regulated structure is prohibited unless: (a) the holder has submitted a consequence category assessment report and certification to the administering authority; and (b) certification for the design, design plan and the associated operating procedures has been certified by a suitably qualified and experienced person in compliance with the relevant condition of this authority.
H7	Certification must be provided by the suitably qualified and experienced person who oversees the preparation of the design plan in the form set out in the 'Manual for assessing consequence categories and hydraulic performance of structures' (ESR/2016/1933), and must be recorded in the Register of Regulated Structures.
H8	Regulated structures must: (a) be designed and constructed in compliance with the 'Manual for assessing consequence categories and hydraulic performance of structures' (ESR/2016/1933); (b) be designed and constructed with due consideration given to ensuring that the design integrity would not be compromised on account of: (i) floodwaters from entering the regulated dam from any watercourse or drainage line; and (ii) wall failure due to erosion by floodwaters arising from any watercourse or drainage line. (c) For regulated structures that are structures associated with a 'failure to contain – seepage' have the floor and sides of the dam designed and constructed to prevent or minimise the passage of the wetting front and any entrained contaminants through either the floor or sides of the dam during the operational life of the dam and for any period of decommissioning and rehabilitation of the dam.
H9	Certification by the suitably qualified and experienced person who supervises the construction must be submitted to the administering authority on the completion of construction of the regulated structure, and state that: (a) the 'as constructed' drawings and specifications meet the original intent of the design plan for that regulated structure; (b) construction of the regulated structure is in accordance with the design plan.
H10	Notification of affected persons All affected persons must be provided with a copy of the emergency action plan in place for each regulated structure: (a) for existing structures that are regulated structures, within 10 business days of this condition taking effect; (b) prior to the operation of the new regulated structure; and (c) if the emergency action plan is amended, within 5 business days of it being amended.

H11	Operation of a regulated structure Operation of a regulated structure, except for an existing structure, is prohibited unless the holder has submitted to the administering authority in respect of a regulated structure, all of the following: (a) one paper copy and one electronic copy of the design plan and certification of the 'design plan' in accordance with condition H6; (b) a set of 'as constructed' drawings and specifications; (c) certification of the 'as constructed drawings and specifications' in accordance with condition H9; (d) where the regulated structure is to be managed as part of an integrated containment system for the purpose of sharing the DSA volume across the system, a copy of the certified system design plan; (e) the requirements of this authority relating to the construction of the regulated structure have been met; (f) the holder has entered the details required under this authority, into a Register of Regulated Structures; and (g) a current operational plan for the regulated structure.
H12	For existing structures that are regulated structures: (a) where the existing structure that is a regulated structure is to be managed as part of an integrated containment system for the purpose of sharing the DSA volume across the system, the holder must submit to the administering authority by 14 September 2018 a copy of the certified system design plan including that structure; and (b) there must be a current operational plan for the existing structures.
H13	Each regulated structure must be maintained and operated, for the duration of its operational life until decommissioned and rehabilitated, in compliance with the current operational plan and, if applicable, the current design plan and associated certified 'as constructed' drawings.
H14	Mandatory Reporting Level Conditions H15 to H18 inclusive only apply to dams which have not been certified as low consequence category for 'failure to contain - overtopping'.
H15	The Mandatory Reporting Level (the MRL) must be marked on a regulated dam in such a way that during routine inspections of that dam, it is clearly observable.
H16	The holder must, as soon as practicable but within 48 hours of becoming aware, notify the administering authority when the level of the contents of a regulated dam reaches the MRL.
H17	The holder must, immediately on becoming aware that the MRL has been reached, act to prevent the occurrence of any unauthorised discharge from the regulated dam.
H18	The holder must record any changes to the MRL in the Register of Regulated Structures.

H19	Design Storage Allowance The holder must assess the performance of each regulated dam or linked containment system over the preceding November to May period based on actual observations of the available storage in each regulated dam or linked containment system taken prior to 1 July of each year.
H20	By 1 November of each year, storage capacity must be available in each regulated dam (or network of linked containment systems with a shared DSA volume), to meet the Design Storage Allowance (DSA) volume for the dam (or network of linked containment systems).
H21	The holder must, as soon as practicable but within 48 hours of becoming aware that the regulated dam (or network of linked containment systems) will not have the available storage to meet the DSA volume on 1 November of any year, notify the administering authority.
H22	The holder must, immediately on becoming aware that a regulated dam (or network of linked containment systems) will not have the available storage to meet the DSA volume on 1 November of any year, act to prevent the occurrence of any unauthorised discharge from the regulated dam or linked containment systems.
H23	Annual Inspection Report Each regulated structure must be inspected each calendar year by a suitably qualified and experienced person.
H24	At each annual inspection, the condition and adequacy of all components of the regulated structure must be assessed and a suitably qualified and experienced person must prepare an annual inspection report containing details of the assessment and include a recommendations section, with any recommended actions to ensure the integrity of the regulated structure or a positive statement that no recommendations are required.
H25	The suitably qualified and experienced person who prepared the annual inspection report must certify the report in accordance with the 'Manual for assessing consequence categories and hydraulic performance of structures' (ESR/2016/1933).
H26	The holder must within 20 business days of receipt of the annual inspection report, provide to the administering authority: (a) The recommendations section of the annual inspection report; and (b) If applicable, any actions being taken in response to those recommendations; and (c) If, following receipt of the recommendations and (if applicable) recommended actions, the administering authority requests a copy of the annual inspection report from the holder, provide this to the administering authority within 10 business days of receipt of the request.
H27	Transfer Arrangements The holder must provide a copy of any reports, documentation and certifications prepared under this authority, including but not limited to any Register of Regulated Structures, consequence assessment, design plan and other supporting documentation, to a new holder on transfer of this authority.

H28	Register of Regulated Structures A Register of Regulated Structures must be established and maintained by the holder for each regulated structure.
H29	The holder must provisionally enter the required information in the Register of Regulated Structures when a design plan for a regulated dam is submitted to the administering authority.
H30	The holder must make a final entry of the required information in the Register of Regulated Structures once compliance with conditions H11 and H12 has been achieved.
H31	The holder must ensure that the information contained in the Register of Regulated Structures is current and complete on any given day.
H32	All entries in the Register of Regulated Structures must be approved by the chief executive officer for the holder of this authority, or their delegate, as being accurate and correct.
H33	The holder must, at the same time as providing the annual return, supply to the administering authority a copy of the records contained in the Register of Regulated Structures, in the electronic format required by the administering authority.
H34	Transitional Arrangements All existing structures that have not been assessed in accordance with either the Manual or the former Manual for Assessing Hazard Categories and Hydraulic Performance of Dams must be assessed and the consequence category certified in accordance with the Manual by 30 March 2018.
H35	All existing structures must subsequently comply with the timetable for any further assessments in accordance with the Manual specified in Table H1 Transitional hydraulic performance requirements for existing structures , depending on the consequence category for each existing structure assessed in the most recent previous certification for that structure.
H36	Table H1 Transitional hydraulic performance requirements for existing structures ceases to apply for a structure once any of the following events has occurred: (a) it has been brought into compliance with the hydraulic performance criteria applicable to the structure under the Manual; or (b) it has been decommissioned; or (c) it has been certified as no longer being assessed as a regulated structure.
H37	Certification of the transitional assessment required by conditions H34 and H35 (as applicable) must be provided to the administering authority within 6 months after the applicable assessment date in Table H1 Transitional hydraulic performance requirements for existing structures .

Table H1 Transitional hydraulic performance requirements for existing structures

Transition period required for existing structures to achieve the requirements of the Manual for Assessing Consequence Categories and Hydraulic Performance of Dams			
Compliance with criteria	High consequence	Significant consequence	Low consequence
>90 percent and a history of good compliance performance in last 5 years as described in Manual	No transition required	No transition required	No transitional conditions apply. Review consequence assessment by 30 September 2024 and by 30 September every 7 years thereafter.
>70 percent – less than or equal to 90 percent	By 30 September 2024 , unless otherwise agreed with the administering authority, based on no history of unauthorized releases.	By 30 September 2027 , unless otherwise agreed with the administering authority, based on no history of unauthorized releases.	No transitional conditions apply. Review consequence assessment by 30 September 2024 and by 30 September every 7 years thereafter.
>50 - ≤70 percent	By 30 September 2022 , unless otherwise agreed with the administering authority, based on no history of unauthorized releases.	By 30 September 2024 , unless otherwise agreed with the administering authority, based on no history of unauthorized releases.	Review consequence assessment by 30 September 2024 and by 30 September every 7 years thereafter.
≤50 percent	By 30 September 2022 , or as per compliance requirements (e.g. TEP timing).	By 30 September 2022 , or as per compliance requirements (e.g. TEP timing).	Review consequence assessment by 30 September 2022 and by 30 September every 5 years thereafter.
Regulated levee designed to prevent the ingress of clean flood water <100 percent compliant ¹	By 30 September 2022 unless otherwise agreed with the administering authority.		

Table note:

1. Levees designed for the diversion of contaminated waters or protection of the structural integrity of a dam are not to be considered as part of this provision. These levees are considered a key design element of the relevant dam and transitional periods should as such align to that relevant compliance criteria and consequence category.

Definitions

Key terms and/or phrases used in this document are defined in this section. Where a term is not defined, the definition in the *Environmental Protection Act 1994*, its regulations or environmental protection policies must be used. If a word remains undefined it has its ordinary meaning.

Administering authority is the agency or department that administers the environmental authority provisions under the *Environmental Protection Act 1994*.

Affected person is someone whose drinking water can potentially be impacted as a result of discharges from a dam or their life or property can be put at risk due to dwellings or workplaces being in the path of a dam break flood.

Airblast overpressure means energy transmitted from the blast site within the atmosphere in the form of pressure waves. The maximum excess pressure in this wave, above ambient pressure is the peak airblast overpressure measured in decibels linear (dB).

Ambient (or total) noise at a place, means the level of noise at the place from all sources (near and far), measured as the Leq for an appropriate time interval.

Annual exceedance probability or AEP the probability that at least one event in excess of a particular magnitude will occur in any given year.

Annual inspection report means an assessment prepared by a suitably qualified and experienced person containing details of the assessment against the most recent consequence assessment report and design plan (or system design plan);

- (a) against recommendations contained in previous annual inspections reports;
- (b) against recognised dam safety deficiency indicators;
- (c) for changes in circumstances potentially leading to a change in consequence category;
- (d) for conformance with the conditions of this authority;
- (e) for conformance with the 'as constructed' drawings;
- (f) for the adequacy of the available storage in each regulated dam, based on an actual observation or observations taken after 31 May each year but prior to 1 November of that year, of accumulated sediment, state of the containment barrier and the level of liquids in the dam (or network of linked containment systems);
- (g) for evidence of conformance with the current operational plan.

Appropriately qualified person means a person who has professional qualifications, training, skills or experience relevant to the nominated subject matter and can give authoritative assessment, advice and analysis on performance relative to the subject matter using the relevant protocols, standards, methods or literature.

ARD means acid rock drainage and refers to the low pH, high heavy metal pollutant typical of sulfidic mine wastes, and most commonly associated with the production of ferrous iron and sulfuric acid through the oxidation of sulphide minerals.

Assessed or assessment by a suitably qualified and experienced person in relation to a consequence assessment of a dam, means that a statutory declaration has been made by that person and, when taken together with any attached or appended documents referenced in that declaration, all of the following aspects are addressed and are sufficient to allow an independent audit of the assessment:

- (a) exactly what has been assessed and the precise nature of that determination;
- (b) the relevant legislative, regulatory and technical criteria on which the assessment has been based;
- (c) the relevant data and facts on which the assessment has been based, the source of that material, and the efforts made to obtain all relevant data and facts; and
- (d) the reasoning on which the assessment has been based using the relevant data and facts, and the relevant criteria.

Associated works in relation to a dam, means:

- (a) operations of any kind and all things constructed, erected or installed for that dam; and
- (b) any land used for those operations.

Authority means an environmental authority.

Biannual means twice per year.

Blasting means the use of explosive materials to fracture:

- (a) rock, coal and other minerals for later recovery; or
- (b) structural components or other items to facilitate removal from a site or for reuse.

Certification means assessment and approval must be undertaken by a suitably qualified and experienced person in relation to any assessment or documentation required by this Manual, including design plans, 'as constructed' drawings and specifications, construction, operation or an annual report regarding regulated structures, undertaken in accordance with the Board of Professional Engineers of Queensland Policy Certification by RPEQs (ID: 1.4 (2A)).

Certifying, certify or certified have a corresponding meaning as 'certification'.

Commercial place means a place used as an office or for business or commercial purposes, other than the Kogan Creek Power Station or a place within the boundaries of the operational land.

Consequence in relation to a structure as defined, means the potential for environmental harm resulting from the collapse or failure of the structure to perform its primary purpose of containing, diverting or controlling flowable substances.

Consequence category means a category, either low, significant or high, into which a dam is assessed as a result of the application of tables and other criteria in the '*Manual for assessing consequence categories and hydraulic performance of structures*' (ESR/2016/1933).

Construction or constructed in relation to a structure includes building a new structure and modifying or lifting an existing structure, but does not include investigations and testing necessary for the purpose of preparing a design plan.

Cover material means any natural soil or rock suitable as a germination medium or landform armouring (also can be referred to as topsoil).

Dam means a land-based structure or a void that contains, diverts or controls flowable substances, and includes any substances that are thereby contained, diverted or controlled by that land-based structure or void and **associated works**.

Dam crest volume means the volume of material (liquids and/or solids) that could be within the walls of a dam at any time when the upper level of that material is at the crest level of that dam. That is, the instantaneous maximum volume within the walls, without regard to flows entering or leaving (for example, via spillway).

Design plan is a document setting out how all identified consequence scenarios are addressed in the planned design and operation of a regulated structure.

Design storage allowance or DSA means an available volume, estimated in accordance with the 'Manual for assessing consequence categories and hydraulic performance of structures' (ESR/2016/1933) published by the administering authority, must be provided in a dam as at 1 November each year in order to prevent a discharge from that dam to an **annual exceedance probability (AEP)** specified in that Manual.

Designer for the purposes of a regulated dam, means the certifier of the design plan for the regulated dam.

Emergency action plan means documentation forming part of the operational plan held by the holder or a nominated responsible officer, that identifies emergency conditions that sets out procedures and actions that will be followed and taken by the dam owner and operating personnel in the event of an emergency. The actions are to minimise the risk and consequences of failure, and ensure timely warning to affected persons and the implementation of protection measures. The plan must require dam owners to annually review and update contact information where required.

Environmental authority holder means the holder of this environmental authority.

Existing structure means a structure that prior to 14 September 2017 meets any or both of the following, a structure:

- (a) with a design that is in accordance with the 'Manual for Assessing Consequence Categories and Hydraulic Performance of Structures' <Version 5 dated 29 March 2016> and that is considerably in progress;
- (b) that is under considerable construction or that is constructed.

Extreme storm storage means a storm storage allowance determined in accordance with the criteria in the 'Manual for assessing consequence categories and hydraulic performance of structures' (ESR/2016/1933) published by the administering authority.

Flowable substance means matter or a mixture of materials which can flow under any conditions potentially affecting that substance. Constituents of a flowable substance can include water, other liquids fluids or solids, or a mixture that includes water and any other liquids fluids or solids either in solution or suspension.

Holder means:

- (a) where the document is an environmental authority, any person who is the holder of, or is acting under, that environmental authority; or
- (b) where this document is a development approval, any person who is the registered operator for that development approval.

Hydraulic performance means the capacity of a regulated dam to contain or safely pass flowable substances based on the design criteria specified for the relevant consequence category in the 'Manual for assessing consequence categories and hydraulic performance of structures' (ESR/2016/1933).

Infrastructure means water storage dams, roads and tracks, building and other structures built for the purpose of mining activities but does not include facilities required for the long term management of mining impacts or the protection of potential resources. Such facilities include dams containing hazardous waste, waste rock dumps, voids, or ore stockpiles and buildings or other structures whose ownership can be transferred and which have a residual beneficial use for the next owner of the operational land or the background landowner.

Lar, 1 hour means the rating level measured over any one hour period, defined as:

- (a) $L_{Ar}, 1 \text{ hour} = L_{Aeq}, 1 \text{ hour} + K1 + K2$ where:

- (i) “K1” means the tone adjustment applicable to any one hour measurement period;
- (ii) “K2” means the impulse adjustment applicable to any one hour measurement period;
- (b) “LAeq, 1 hour” means the time - average A weighted sound pressure level over any one hour measurement period; and
- (c) “LA 10, adj, 10 mins” means the A – weighted sound pressure level, (adjusted for tonal character and impulsiveness of the sound) exceeded for 10% of any 10 minute measurement period, using Fast response.

Land in the ‘land schedule’ of this document means land excluding waters and atmosphere, “ noise sensitive place” or a “commercial place”.

Land use term to describe the selected post mining use of the land, which is planned to occur after the cessation of mining operations.

Leachate means the liquid that has passed through or emerged from, or is likely to have passed through or emerged from, a material stored, processed or disposed of at the operational land which contains soluble, suspended or miscible contaminants likely to have been derived from the said material.

Levee means an embankment that only provides for the containment and diversion of stormwater or flood flows from a contributing catchment, or containment and diversion of flowable materials resulting from releases from other works, during the progress of those stormwater or flood flows or those releases; and does not store any significant volume of water or flowable substances at any other times.

Low consequence dam means any dam that is not a high or significant consequence category as assessed using the ‘Manual for assessing consequence categories and hydraulic performance of structures’ (ESR/2016/1933).

Mandatory reporting level or MRL means a warning and reporting level determined in accordance with the criteria in the ‘Manual for assessing consequence categories and hydraulic performance of structures’ (ESR/2016/1933) published by the administering authority.

Manual means the ‘Manual for assessing consequence categories and hydraulic performance of structures’ (ESR/2016/1933) published by the administering authority, as amended from time to time.

Mine affected water:

- (a) means the following types of water:
 - (i) pit water, tailings dam water, processing plant water
 - (ii) water contaminated by a mining activity which would have been an environmentally relevant activity under Schedule 2 of the *Environmental Protection Regulation 2019* if it had not formed part of the mining activity
 - (iii) rainfall runoff which has been in contact with any areas disturbed by mining activities which have not yet been rehabilitated, excluding rainfall runoff discharging through release points associated with erosion and sediment control structures that have been installed in accordance with the standards and requirements of an Erosion and Sediment Control Plan to manage such runoff, provided that this water has not been mixed with pit water, tailings dam water, processing plant water or workshop water
 - (iv) groundwater which has been in contact with any areas disturbed by mining activities which have not yet been rehabilitated
 - (v) groundwater from the mine’s dewatering activities
 - (vi) a mix of mine affected water (under any of paragraphs (i)-(v) and other water.

- (b) does not include surface water runoff which, to the extent that it has been in contact with areas disturbed by mining activities that have not yet been completely rehabilitated, has only been in contact with:
- (i) land that has been rehabilitated to a stable landform and revegetated in accordance with the rehabilitation milestones in the approved PRCP schedule but only still awaiting maintenance and monitoring of the rehabilitation over a specified period of time to demonstrate rehabilitation success, or
 - (ii) land that has partially been rehabilitated and monitoring demonstrates the relevant part of the landform with which the water has been in contact does not cause environmental harm to waters or groundwater, for example:
 - a) monitoring data demonstrating hazardous material adequately contained with the site
 - b) evidence provided through monitoring that the relevant surface water would have met the water quality parameters for mine affected water release limits in this environmental authority, if those parameters had been applicable to the surface water runoff, or
 - c) both.

Mine overburden means the natural material excavated and discarded during mining operations. This typically includes subsoil, clay, rock, and other geological materials, not exposed to potential contaminants, that are removed to expose the target resource.

Modification or modifying (see definition of 'construction')

Natural flow means the flow of water through waters caused by nature.

Noxious means harmful or injurious to health or physical well-being, other than trivial harm.

Offensive means causing reasonable offence or displeasure; is disagreeable to the sense; disgusting nauseous or repulsive, other than trivial harm.

Operational plan includes:

- (a) normal operating procedures and rules (including clear documentation and definition of process inputs in the DSA);
- (b) contingency and emergency action plans including operating procedures designed to avoid and/or minimise environmental impacts including threats to human life resulting from any overtopping or loss of structural integrity of the regulated structure.

Peak particle velocity (ppv) means a measure of ground vibration magnitude which is the maximum rate of change of ground displacement with time, usually measured in millimetres/second (mms).

Protected area means:

- (a) a protected area under the *Nature Conservation Act 1992*; or
- (b) a marine park under the *Marine Parks Act 2004*; or
- (c) a World Heritage Area.

Register of regulated structures includes:

- (a) Date of entry in the register;
- (b) Name of the structure, its purpose and intended/actual contents;
- (c) The consequence category of the dam as assessed using the 'Manual for assessing consequence categories and hydraulic performance of structures' (ESR/2016/1933);

- (d) Dates, names, and reference for the design plan plus dates, names, and reference numbers of all document(s) lodged as part of a design plan for the dam;
- (e) Name and qualifications of the suitably qualified and experienced person who certified the design plan and 'as constructed' drawings;
- (f) For the regulated dam, other than in relation to any levees:
 - (i) The dimensions (metres) and surface area (hectares) of the dam measured at the footprint of the dam;
 - (ii) Coordinates (latitude and longitude in GDA2020) within five metres at any point from the outside of the dam including its storage area
 - (iii) Dam crest volume (megalitres);
 - (iv) Spillway crest level (metres AHD).
 - (v) Maximum operating level (metres AHD);
 - (vi) Storage rating table of stored volume versus level (metres AHD);
 - (vii) Design storage allowance (megalitres) and associated level of the dam (metres AHD);
 - (viii) Mandatory reporting level (metres AHD);
- (g) The design plan title and reference relevant to the dam;
- (h) The date construction was certified as compliant with the design plan;
- (i) The name and details of the suitably qualified and experienced person who certified that the constructed dam was compliant with the design plan;
- (j) Details of the composition and construction of any liner;
- (k) The system for the detection of any leakage through the floor and sides of the dam;
- (l) Dates when the regulated dam underwent an annual inspection for structural and operational adequacy, and to ascertain the available storage volume for 1 November of any year;
- (m) Dates when recommendations and actions arising from the annual inspection were provided to the administering authority;
- (n) Dam water quality as obtained from any monitoring required under this authority as at 1 November of each year.

Regulated structure means any structure in the significant or high consequence category as assessed using the 'Manual for assessing consequence categories and hydraulic performance of structures' (ESR/2016/1933) published by the administering authority. A regulated structure does not include:

- a fabricated or manufactured tank or container, designed and constructed to an Australian Standard that deals with strength and structural integrity of that tank or container; and
- a sump or earthen pit used to store residual drilling material and drilling fluid only for the duration of drilling and well completion activities.

Rehabilitation the process of reshaping and revegetating land to restore it to a stable condition and in accordance with the criteria for rehabilitation milestones set out in the approved PRCP schedule and, where relevant, includes remediation of contaminated land.

Representative means a sample set which covers the variance in monitoring or other data either due to natural changes or operational phases of the mining activities.

Sensitive place means:

- (a) a dwelling, residential allotment, mobile home or caravan park, residential marina or other residential premises; or
- (b) an educational institution; or
- (c) a medical centre or hospital; or
- (d) a protected area under the *Nature Conservation Act 1992*, the *Marine Parks Act 2004* or World Heritage Area; or
- (e) a public park or gardens; or
- (f) a place used as a workplace, an office or for business or commercial purposes which is not part of the mining activity or the Kogan Creek Power Station or place within the boundaries of the operational land and does not include employees accommodation or public roads.

Spillway means a weir, channel, conduit, tunnel, gate or other structure designed to permit discharges from the dam, normally under flood conditions or in anticipation of flood conditions.

Stable condition means land is in a stable condition if:

- (a) the land is safe and structurally stable; and
- (b) there is no environmental harm being caused by anything on or in the land; and
- (c) the land can sustain a post-mining land use.

Structure means dam or levee.

Suitably qualified and experienced person in relation to regulated structures means a person who is a Registered Professional Engineer of Queensland (RPEQ) under the provisions of the *Professional Engineers Act 2002*, and has demonstrated competency and relevant experience:

- for regulated dams, an RPEQ who is a civil engineer with the required qualifications in dam safety and dam design
- for regulated levees, an RPEQ who is a civil engineer with the required qualifications in the design of flood protection embankments.

Note: It is permissible that a suitably qualified and experienced person obtain subsidiary certification from an RPEQ who has demonstrated competence and relevant experience in either geomechanics, hydraulic design or engineering hydrology.

System design plan means a plan that manages an integrated containment system that shares the required DSA and/or ESS volume across the integrated containment system.

Watercourse has the meaning in Schedule 4 of the *Environmental Protection Act 1994* and means:

- (a) a river, creek or stream in which water flows permanently or intermittently:
 - (i) in a natural channel, whether artificially improved or not; or
 - (ii) in an artificial channel that has changed the course of the watercourse.
- (b) watercourse includes the bed and banks and any other element of a river, creek or stream confining or containing water.


Waters includes all or any part of a river, stream, lake, lagoon, pond, swamp, wetland, unconfined surface water, unconfined water in natural or artificial watercourses, bed and banks of a watercourse, dams, non-tidal or tidal waters (including the sea), stormwater channel, stormwater drain, roadside gutter, stormwater run-off, and groundwater.

WaTERS: Water Tracking and Electronic Reporting System or subsequent updated system, used to submit monitoring data and notify the Queensland Government. It is available at <https://waters.des.qld.gov.au> or by contacting psd.help@qld.gov.au.

Waste includes anything that is:

- (a) left over, or an un-wanted by - product, from an industrial, commercial, domestic or other activity; or
- (b) surplus to the industrial, commercial, domestic or other activity generating the waste.

Wet season means the time of year, covering one or more months, when most of the average annual rainfall in a region occurs. For the purposes of DSA determination this time of year is deemed to extend from 1 November in one year to 31 May in the following year inclusive.

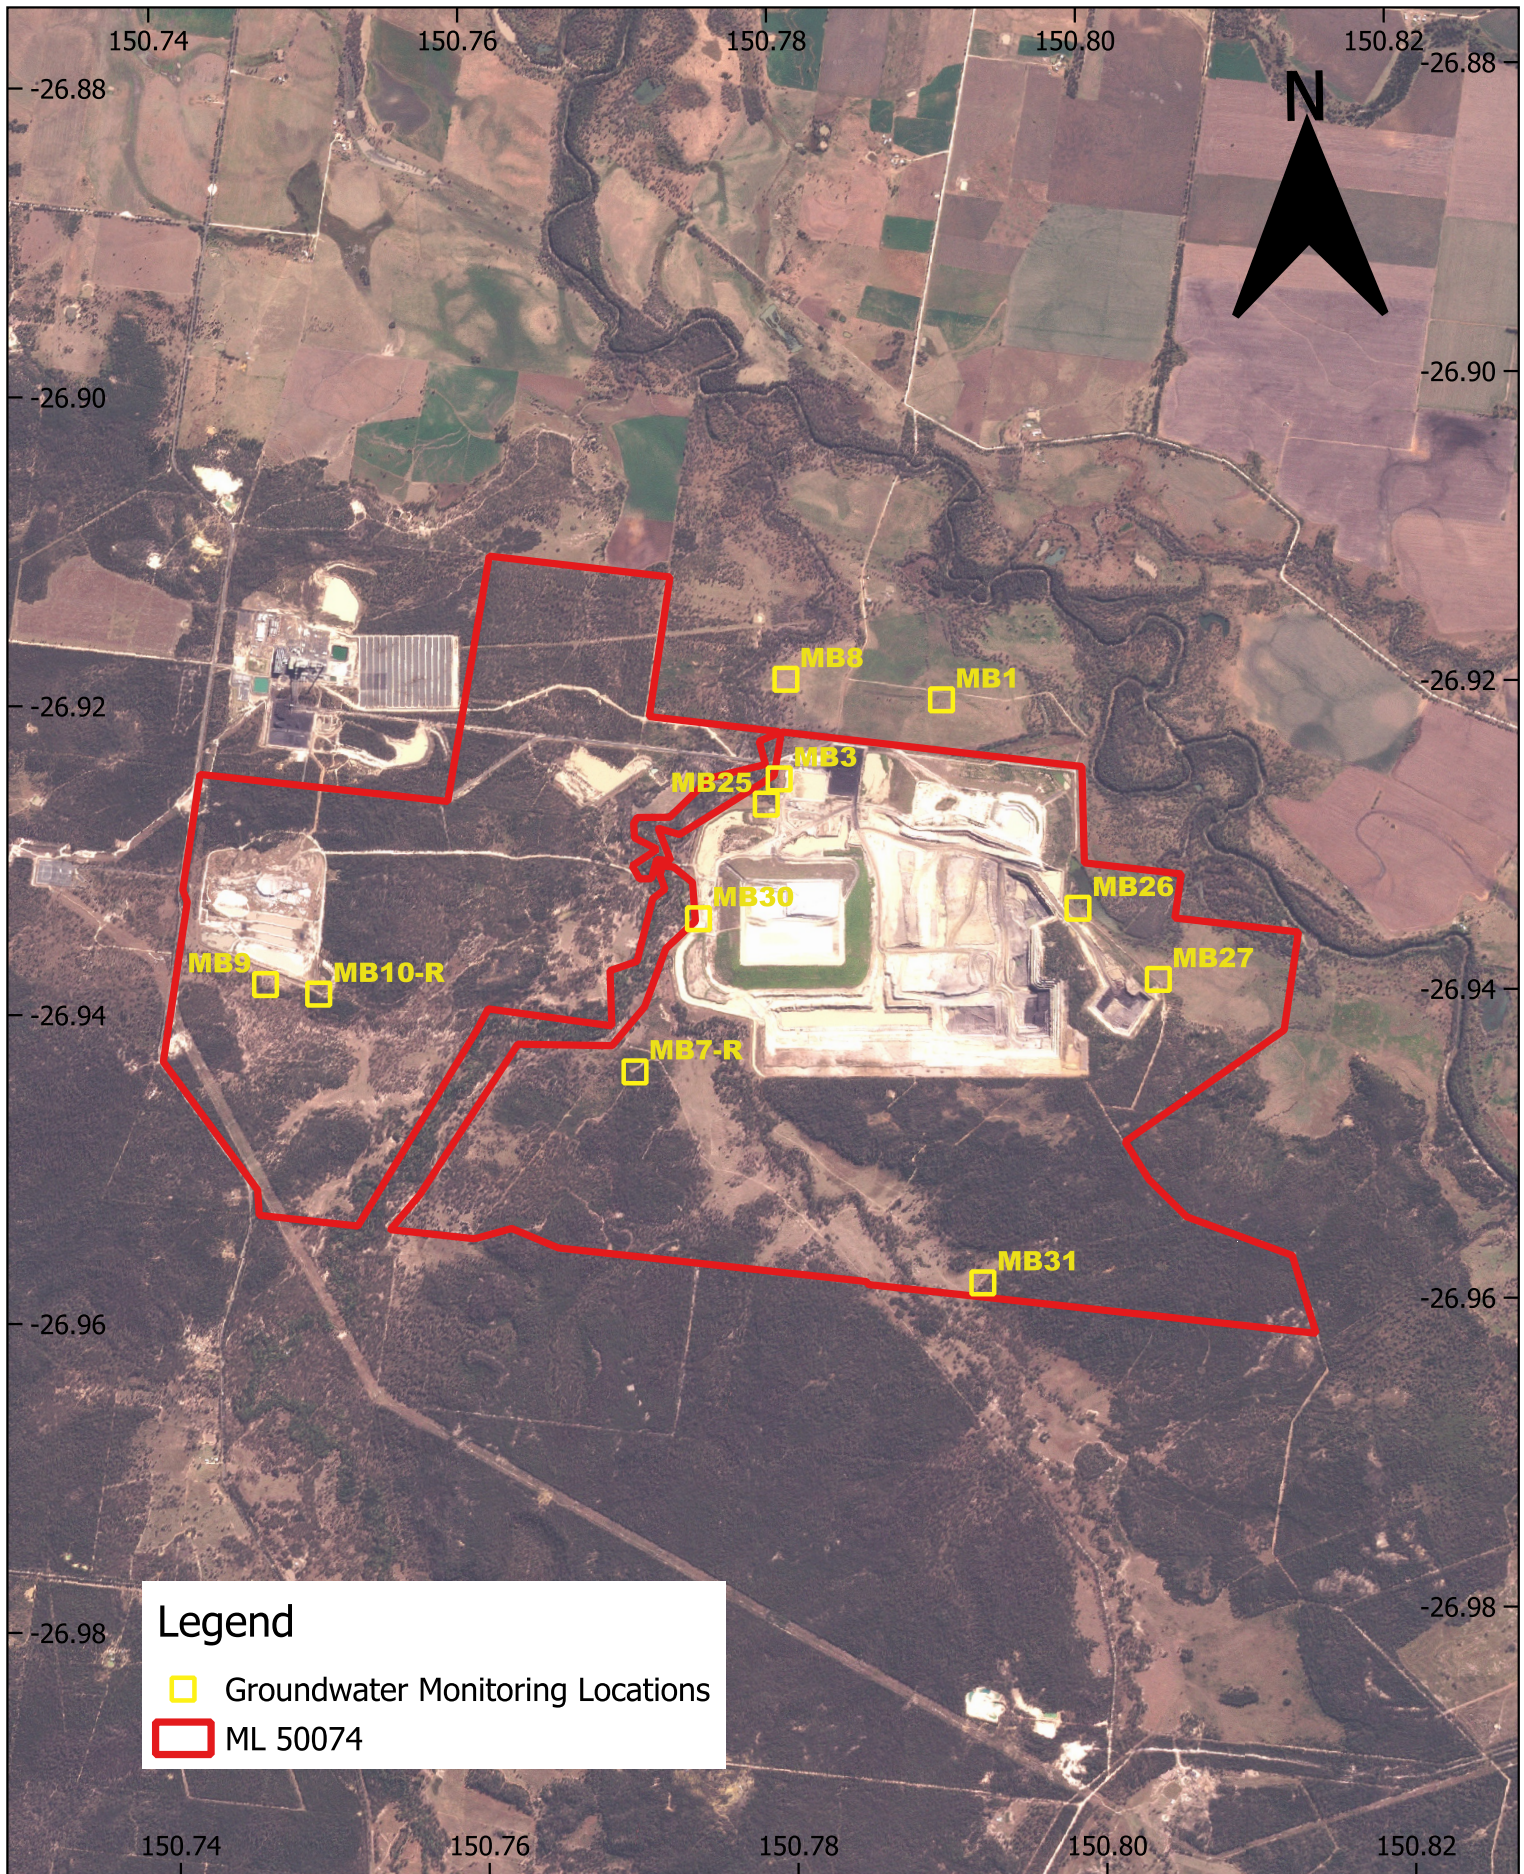

Appendix 1:

Groundwater Monitoring Locations

Imagery © Planet Inc 2024. This work is licensed under [CC BY 4.0](https://creativecommons.org/licenses/by/4.0/)


Prepared by
Department of Environment,
Science and Innovation



While every care is taken to ensure the accuracy of this data, the State of Queensland makes no statements, representations or warranties about the accuracy, reliability, completeness or suitability of any information in this project.

The State of Queensland disclaims all responsibility for information contained in this product and all liability (including without limitation, liability in negligence) for all expenses, losses, damages and costs you may incur as a result of the information being inaccurate or incomplete in any way or for any reason.

This product is displayed in GDA2020
Product created 2024-07-05



Permit

Environmental Authority EPML00417213 Kogan Creek Coal Mine

END OF ENVIRONMENTAL AUTHORITY