

Permit

Environmental Protection Act 1994

Environmental authority EPPG00832113

This environmental authority is issued by the administering authority under Chapter 5 of the Environmental Protection Act 1994.

Environmental authority number: EPPG00832113

Environmental authority takes effect on 16 October 2019

Environmental authority holder(s)

Name(s)	Registered address
Total E&P Australia II	BGC Centre, Level 13 28 The Esplanade PERTH WA 6000
KGLNG E&P Pty Ltd	Level 11 28 The Esplanade PERTH WA 6000
PAPL (Upstream II) Pty Limited	Level 12 60 Carrington Street SYDNEY NSW 2000
SANTOS QUEENSLAND CORP.	Ground Floor, Santos Centre 60 Flinders Street ADELAIDE SA 5000 Australia
Total E&P Australia	BGC Centre Level 13, 28 The Esplanade PERTH WA 6000
Bronco Energy Pty Limited	Ground Floor, Santos Centre 60 Flinders Street ADELAIDE SA 5000 Australia
Santos TPY Corp	Santos Centre G, 60 Flinders Street ADELAIDE SA 5000
SANTOS TPY CSG CORP.	Ground Floor, Santos Centre 60 Flinders Street ADELAIDE SA 5000 Australia
SANTOS TOGA PTY LTD	Ground Floor, Santos Centre 60 Flinders Street ADELAIDE SA 5000 Australia

Environmentally relevant activity and location details

Environmentally relevant activity/activities	Location(s)
Non-Scheduled Petroleum Activity Authority to Prospect - ATP	ATP745

Additional information for applicantsEnvironmentally relevant activities

The description of any environmentally relevant activity (ERA) for which an environmental authority (EA) is issued is a restatement of the ERA as defined by legislation at the time the EA is issued. Where there is any inconsistency between that description of an ERA and the conditions stated by an EA as to the scale, intensity or manner of carrying out an ERA, the conditions prevail to the extent of the inconsistency.

An EA authorises the carrying out of an ERA and does not authorise any environmental harm unless a condition stated by the EA specifically authorises environmental harm.

A person carrying out an ERA must also be a registered suitable operator under the *Environmental Protection Act 1994* (EP Act).

Contaminated land

It is a requirement of the EP Act that an owner or occupier of contaminated land give written notice to the administering authority if they become aware of the following:

- the happening of an event involving a hazardous contaminant on the contaminated land (notice must be given within 24 hours); or
- a change in the condition of the contaminated land (notice must be given within 24 hours); or
- a notifiable activity (as defined in Schedule 3) having been carried out, or is being carried out, on the contaminated land (notice must be given within 20 business days);

that is causing, or is reasonably likely to cause, serious or material environmental harm.

For further information, including the form for giving written notice, refer to the Queensland Government website www.qld.gov.au, using the search term 'duty to notify'.

Environmental authority

Take effect

Please note that, in accordance with section 200 of the EP Act, an EA has effect:

- a) if the authority is for a prescribed ERA and it states that it takes effect on the day nominated by the holder of the authority in a written notice given to the administering authority-on the nominated day; or
- b) if the authority states a day or an event for it to take effect-on the stated day or when the stated event happens; or
- c) otherwise-on the day the authority is issued.

However, if the EA is authorising an activity that requires an additional authorisation (a relevant tenure for a resource activity, a development permit under the *Sustainable Planning Act 2009* or an SDA Approval under the *State Development and Public Works Organisation Act 1971*), this EA will not take effect until the additional authorisation has taken effect.

If this EA takes effect when the additional authorisation takes effect, you must provide the administering authority written notice within 5 business days of receiving notification of the related additional authorisation taking effect.

If you have incorrectly claimed that an additional authorisation is not required, carrying out the ERA without the additional authorisation is not legal and could result in your prosecution for providing false or misleading information or operating without a valid environmental authority.

Tristan Roberts
Department of Environment and Science
Delegate of the administering authority
Environmental Protection Act 1994

Enquiries:
Energy and Extractive Resources
Department of Environment and Science
GPO Box 2454, Brisbane QLD 4001
Phone: 07 33306020
Email: energyandextractive@des.qld.gov.au

Date issued: 16 October 2019

Obligations under the *Environmental Protection Act 1994*

In addition to the requirements found in the conditions of this environmental authority, the holder must also meet their obligations under the EP Act, and the regulations made under the EP Act. For example, the holder must comply with the following provisions of the Act:

- general environmental duty (section 319)
- duty to notify environmental harm (section 320-320G)
- offence of causing serious or material environmental harm (sections 437-439)
- offence of causing environmental nuisance (section 440)
- offence of depositing prescribed water contaminants in waters and related matters (section 440ZG)
- offence to place contaminant where environmental harm or nuisance may be caused (section 443)

This environmental authority consists of the following Schedules:

Part A

Pre-Existing Legislative Requirements and Conditions

<u>SCHEDULE A - GENERAL CONDITIONS</u>	2
<u>APPENDIX A - DEFINITIONS</u>	14
<u>APPENDIX B – MAP OF ATP745P</u>	22
<u>APPENDIX C — ENVIRONMENTALLY SENSITIVE AREAS</u>	23

Part B

Legislative Requirements and Conditions for the Santos GLNG Gas Field Development Project

<u>SCHEDULE A- GENERAL</u>	24
<u>SCHEDULE B – WATER</u>	29
<u>SCHEDULE C – LAND</u>	33
<u>SCHEDULE D – BIODIVERSITY VALUES</u>	38
<u>SCHEDULE E – WASTE</u>	43
<u>SCHEDULE F – NOISE</u>	44
<u>SCHEDULE G – AIR</u>	46
<u>SCHEDULE H – REGULATED STRUCTURES</u>	47
<u>SCHEDULE I – WELL CONSTRUCTION, MAINTENANCE AND STIMULATION ACTIVITIES</u>	51
<u>SCHEDULE J – REHABILITATION</u>	55
<u>SCHEDULE K – NOTIFICATION</u>	57
<u>SCHEDULE L – DEFINITIONS</u>	59

Part A

Pre-Existing Legislative Requirements and Conditions

SCHEDULE A - GENERAL CONDITIONS

Condition 1 — Significant Disturbance

Petroleum activities must not cause more than 0.1% of the total land area on the relevant petroleum authorities (excluding pipeline licences) that constitute the petroleum project to be significantly disturbed any one time.

Condition 2 - Work Program and Development Plan

The holder of the environmental authority must submit to the administering authority.

- (a) a copy of the initial work program, later work programs and any amendments to work programs when submitted to the Department of Employment, Economic Development and Innovation (DEEDI) under the *Petroleum and Gas (Production and Safety) Act 2004* (P&G Act) for authorities to prospect; or
- (b) a copy of the initial development plan, later development plans and any amendments to development plans when submitted to the DEEDI under the P&G Act for petroleum leases.

Condition 3 — Financial Assurance

The holder or proposed holder of the environmental authority must:

- (a) calculate a **financial assurance** as required by the administering authority ; and
- (b) attach a completed Schedule of Disturbance to the original and any amended work program or development plan: and
- (c) provide to the administering authority the financial assurance in the amount and form required by the administering authority at the time of submission of any original, later or amended work program or development plan; and
- (d) maintain the financial assurance until the administering authority is satisfied that no claim is likely to be made on the assurance.

Condition 4— Environmentally Sensitive Areas

The holder of the environmental authority must not:

- (a) conduct petroleum activities within a category A or B environmentally sensitive area;
- (b) cause any significant disturbance to land within 1 km of a category A environmentally sensitive area or within 500m of a category B environmentally sensitive area; or
- (c) conduct petroleum activities in a category C environmentally sensitive area unless there is a written agreement to enter the area for those activities from the relevant administering authority.

Condition 5

If the relevant administering authority imposes any conditions on undertaking petroleum activities within a Category C environmentally sensitive area, the holder must comply with those conditions.

Condition 6— Heritage Places and Archaeological Artefacts

The holder of the environmental authority must take all reasonable and practicable measures to avoid impacting upon places of known or potential cultural heritage significance whilst carrying out petroleum activities.

Condition 7 - Wild River Areas

The holder of the environmental authority must ensure that any petroleum activities carried out within a wild river area comply with the conditions in the relevant **wild river declaration** for the area that state they are for petroleum activities.

Condition 8 - Clearing Vegetation

Clearing vegetation must be minimised and only be undertaken where necessary to carry out the authorised petroleum activities. Where viable alternatives exist, clearing vegetation must not be undertaken:

- (a) in, or within 50 metres of, the **high bank of a watercourse**;
- (b) in, or within 100 metres of a wetland or **spring**;
- (c) in a way that dissects large tracts of vegetation resulting in a reduction in the current level of **ecosystem functioning**, an increase in **threatening processes**, or dissection of corridors of vegetation that provide connection between contiguous tracts of vegetation;
- (d) in a way that damages adjacent live vegetation;
- (e) in an **'of concern' regional ecosystem**;
- (f) on slopes greater than 6° (~10%);
- (g) on **dispersible soils** or **highly erodible soils**; or
- (h) in **discharge areas**.

Condition 9

Cleared vegetation must be stockpiled in a manner that facilitates respreading or salvaging and does not impede vehicle, stock or wildlife movements.

Condition 10- Topsoil Management

Except in areas of highly erodible soils, topsoil must be:

- (a) removed from an area prior to other significant disturbance commencing in the area;
- (b) stockpiled in a manner that will minimise erosion and preserve its biological and chemical integrity; and
- (c) used only for on-site rehabilitation purposes.

Condition 11 - Acid Sulfate Soils

When carrying out petroleum activities in areas with a high probability of acid sulfate soils, the holder of the environmental authority must comply with an acid sulfate soil environmental management plan prepared in accordance with the *Slate Planning Policy 2/02 Guideline: Planning and Managing Development Involving Acid Sulfate Soils* and the relevant Guidelines.

Condition 12- Drilling Operations

All waste fluids and muds resulting from drilling and exploration activities must be contained in an appropriately constructed dam or containment structure for disposal, remediation or reuse where applicable.

Condition 13

Oil and synthetic based drilling muds are not authorised to be used under the authority.

Condition 14 - Pipeline Construction

The pipeline construction corridor must not exceed 30 metres in width. Turn arounds and work areas must not exceed 50 metres in width.

Condition 15

During construction, pipe must be strung with gaps to allow for fauna movement across the line of the pipe.

Condition 16

Measures must be employed to prevent fauna entrapment in pipe sections or within the pipeline trench.

Condition 17

Open trenches and pipes must be checked for fauna prior to backfill and any trapped animals removed.

Condition 18

Hydrostatic test water must be contained in dams on site, tested and either

- (a) directly reused where appropriate for petroleum activities;
- (b) treated so that it meets water quality criteria for the intended reuse; or
- (c) disposed of via evaporation.

Condition 19

The pipeline construction corridor must be rehabilitated on completion of laying the pipe, with the exception of the width of an access track, if necessary, to enable vehicular movement along the corridor for pipeline inspection and maintenance.

Condition 20 —Spill Response

A spill response plan must be developed for all pipelines and other plant or equipment under this authority carrying liquids that have the potential to cause environmental harm. The plan must address the following:

- (a) monitoring and detection systems;
- (b) notification and reporting procedures (internal and external);
- (c) call-out procedures and contact lists;
- (d) measures required to halt the spill (i.e. control of pumps, valves etc.);
- (e) spill containment procedures;
- (f) procedures to safely recover the spilt material;
- (g) clean up and rehabilitation procedures;
- (h) requirements for the remediation or disposal of contaminated soil;
- (i) personnel responsibilities;
- (j) equipment requirements, location, storage, maintenance and transport;

- (k) communications and logistics: and
- (l) incident investigation procedures.

Condition 21

Workforce training must be conducted in spill response and recovery procedures.

Condition 22 —Contaminant Release

Contaminants that are likely to cause environmental nuisance, or serious or material environmental harm, must not be released directly or indirectly to land or **waters** unless explicitly authorised in the environmental authority.

Condition 23

As soon as the environmental authority holder is aware of any release to the environment specified in the preceding condition that is causing or threatening to cause environmental nuisance, or serious or material environmental harm, the release must be stopped, promptly rectified using appropriate equipment and remediation methods and all reasonable actions taken to prevent a recurrence of the release. Report in writing to the administering authority any findings and actions taken within 20 business days of that event.

Condition 24 — Bunding

Any container such as a tank or drum that contains material that has the potential to cause material or serious environmental harm if **released** to the environment must be appropriately labelled and be contained in a **bunded** area. Volumes of liquid less than 1000L may be stored without bunding if:

- (a) recovery of any spilt material is possible;
- (b) containers or drums are stored undercover on an impervious base;
- (c) the storage is occurring at least 50m from any waters; and
- (d) absorbent material is readily available for clean up if necessary.

Individual drums may be temporarily stored on spill containment pallets.

Condition 25

The net capacity of a bunded compound in a storage facility must be at least 110% of a single storage tank or 100% of the largest storage tank plus 10% of the second largest storage tank in multiple storage areas.

Condition 26

If an automatic fire sprinkler system is installed in or over any bunded tank or drum storage compound, the capacity of the on-site containment must be increased to include the output from the sprinkler system over a 20 minute period.

Condition 27

If the material to be bunded is contained in drums (or other small containers) the bunded area must contain at least 25% of the total volume of the stored product.

Condition 28

The bund floor and wall must be built of materials impervious to the contents of any tank or container within the bund and be capable of preventing the migration of any spillage or leakage outside the bund wall to the environment.

Condition 29

Wall type bunds at tank storage facilities must be at least 0.5 metres high and not exceed 1.5 metres high. The distance between a tank and the bund wall must be at least 1 metre.

Condition 30

A collection sump must be provided in the bund floor and the floor must be graded in such a way that liquids collect in the sump. The sump must not be connected to a sewer drainage system or any waters.

Condition 31

The bund must be designed to minimise rainwater collection. Removal of accumulated rainwater must be done with a manually operated pump, baling from the sump or via a locked valve. Rainwater from the bund must meet water quality criteria for the intended use or receiving environment prior to release.

Condition 32

All pipework must be sited above ground and go over the bund walls where possible. Pumps must still be able to operate when the bund is full of liquid.

Condition 33

Piping and pumping facilities must be arranged so that the potential for leaks to escape the confines of the bund is minimised.

Condition 34— Flammable and Combustible Liquids

Flammable and combustible liquids, including petroleum products, must be stored and handled in accordance with the latest edition of Australian Standard 1940 — The storage and handling of flammable and combustible liquids.

Condition 35 — Notification

The holder of this authority must:

- a) telephone the DERM's Pollution Hotline (1300 130 372) or local office as soon as practicable after becoming aware of any release of contaminants not in accordance with the conditions of this authority or any event where environmental harm has been caused or threatened: and
- b) notify the administering authority in writing within 14 days of the initial notification.

Condition 36 — Erosion and Sediment Control

Erosion protection and sediment control measures must be designed, implemented and maintained to minimise erosion and the release of sediment resulting from carrying out the petroleum activities.

Condition 37 — Protection of Watercourses, Wetlands and Springs

Unless otherwise approved under relevant legislation, the holder of the environmental authority must not:

- (a) excavate or place **fill** in a way that interferes with the flow of water in a watercourse, wetland, or spring, including: works that divert the course of flow of the water, or works that impound the water;
- (b) undertake activities that take water from a watercourse, wetland or spring; or

- (c) undertake activities that take **overland flow water** using works that are mentioned as assessable development in a water resource plan under the *Water Act 2000*.

Condition 38 — Activities in a Watercourse, Wetland or Spring

Significant disturbance to the **bed** or **banks** of a watercourse or wetland, or to a spring must:

- (a) only be caused where necessary for the construction, operation and/or maintenance of roads, tracks and pipelines that are essential for carrying out other authorised petroleum activities and no reasonable alternative location is feasible; and
- (b) be no larger than the minimum area necessary for the purpose; and
- (c) be designed by an appropriately qualified person; and
- (d) be undertaken and maintained by a person with appropriate skills who has been informed of the design and is appropriately supervised; and
- (e) have rehabilitation commence as soon as reasonably practicable upon cessation of the relevant authorised petroleum activities.

Condition 39

Sediment control measures must be implemented to minimise any increase in water turbidity due to carrying out petroleum activities in the bed or banks of a watercourse or wetland, or in a spring.

Condition 40

Routine visual monitoring must be undertaken while carrying out petroleum activities in a watercourse, wetland or spring. If, due to the petroleum activities, water turbidity increases in the watercourse, wetland or spring outside contained areas, works must cease and the sediment control measures must be rectified before activities recommence.

Condition 41 — Management of Dams

Only low hazard dams are authorised under this authority.

Condition 42

All **dams** must be designed, constructed, operated and maintained in accordance with **accepted engineering standards** currently appropriate for the purpose for which they are intended.

Condition 43

The **hazard category** of each dam must be determined by a **suitably qualified and experienced person** prior to its construction and at least once per year, based on documented evidence sufficient to define or confirm the current nature and extent of environmental consequences from potential failure of that dam.

Condition 44

Where the hazard category of a dam is for the first time assessed as significant or high, the holder of the environmental authority must:

- (a) as soon as reasonably possible, advise the administering authority of the current details of that dam, including:
 - i. the assessed hazard category of that dam,

- ii. sufficient points of latitude and longitude in the current Australian geodetic datum to form a perimeter around that dam and its associated works,
 - iii. the maximum surface area, maximum volume, maximum depth of that dam; and
- (b) apply to amend the environmental authority to a level 1 environmental authority; and
- (c) ensure that the dam meets the **hydraulic performance** required of the assessed hazard category within 12 months of that assessment.

Condition 45

The condition of all dams must be monitored for early signs of loss of structural or hydraulic integrity, based on the advice of a suitably qualified and experienced person. The methods of monitoring and frequency of monitoring shall be as assessed by the person who conducts the hazard assessment based on the particular circumstances of each dam.

Condition 46

In the event of early signs of loss of structural or hydraulic integrity, the holder of the environmental authority must immediately take action to prevent or minimise any actual or potential environmental harm and report in writing any findings and actions taken to the administering authority within 20 business days of that event.

Condition 47 — Decommissioning Dams

Each dam must be decommissioned such that it either:

- (a) becomes a **stable** landform that no longer contains **flowable substances**; or
- (b) is approved or authorised under relevant legislation for a **beneficial use**; or
- (c) is a void authorised by the administering authority to remain after decommissioning, or
- (d) is compliant with the rehabilitation requirements of the authority; and
- (e) is agreed by the post petroleum authority landowner/holder to remain after surrender of the environmental authority and meets water quality criteria for the intended use.

Condition 48 - Access to Dams

Any dam constructed as part of the petroleum activities must be managed so that either

- (a) where the quality of the water is likely to result in adverse health affects if contacted or consumed, adequate barriers are provided to limit access to the water by humans, livestock and native fauna; or
- (b) where the quality of the water will not result in any adverse health affects if contacted or consumed, safe access to the water is provided for livestock and native fauna.

Condition 49 - Associated Water

Associated water may be temporarily contained in a dam or other containment vessel on site prior to:

- (a) reuse on site for petroleum activities; or
- (b) use under the provisions of *the Petroleum and Gas (Production and Safety) Act 2004*; or
- (c) use for an approved beneficial use; or
- (d) removal from site for treatment or disposal at an appropriately authorised facility.

Condition 50

If the use of associated water for a purpose other than a petroleum activity has been authorised by grant of a Notice of decision to approve a resource for beneficial use under Part 6A of the *Environmental Protection (Waste Management) Regulation 2000* it can be used in accordance with the Notice for the stated type of use(s).

Condition 51 - Release of Contaminants to the Atmosphere

The release of **noxious** or **offensive** odour, dust, particulate matter or any other airborne contaminant resulting from the petroleum activities must not cause environmental nuisance at any sensitive place or commercial place.

Condition 52 — Noise Management

If the environmental authority holder receives a complaint as defined in Condition 63 about noise from the petroleum activities at a **sensitive place** or **commercial place**, the holder must conduct an appropriate investigation and must implement remedial action if the noise from the petroleum activities exceeds the noise limits at the sensitive place or commercial place in Table 1 — Noise Limits.

Table 1 — Noise Limits

Sensitive Place						
Noise level dB(A) measured as:	Monday to Saturday			Sundays and public holidays		
	7am to 5pm	6pm to 10pm	10pm to 7am	9am to 6pm	6pm to 10pm	10pm to 9am
L _{A90,adj, 15 min}	lesser of bg+3 or 48	bg+0	bg+0	bg+0	bg+0	bg+0
L _{A10,adj, 15 min}	lesser of bg+5 or 50	Lesser of bg+5 or 45	bg+0	lesser of bg+5 or 45	lesser of bg+5 or 40	bg+0
L _{A1,adj, 15 min}	lesser of bg+10 or 55	lesser of bg+10 or 50	lesser of bg+5 or 45	lesser of bg+10 or 50	lesser of bg+10 or 45	lesser of bg+5 or 40
Commercial Place						
Noise level dB(A) measured as:	Monday to Saturday			Sundays and public holidays		
	7am to 5pm	6pm to 10pm	10pm to 7am	9am to 6pm	6pm to 10pm	10pm to 9am
L _{A90,adj, 15 min}	lesser of bg+5 or 50	bg+0	bg+0	lesser of bg+3 or 43	bg+0	bg+0
L _{A10,adj, 15 min}	lesser of bg+10 or 55	lesser of bg+10 or 50	lesser of bg+5 or 45	lesser of bg+10 or 50	lesser of bg+10 or 45	lesser of bg+5 or 40
L _{A1,adj, 15 min}	lesser of bg+15 or 60	lesser of bg+15 or 55	lesser of bg+10 or 50	lesser of bg+15 or 55	lesser of bg+15 or 50	lesser of bg+10 or 45

- bg = **background noise level**
- In the event that measured bg is less than 25 dB(A), then 25 dB(A) is to be substituted for the measured level
- If the background is higher than the number shown on the second line in any box, the limit is to be background plus 0.

Condition 53

The method of measurement and reporting of noise levels must comply with the latest edition of the Department of Environment and Resource Management's (Environmental Protection Agency's) Noise Measurement Manual or the most recent version of AS1055 Acoustics - Description and measurement of environmental noise.

Condition 54 — General Waste Management

Where practicable, general waste generated in carrying out the petroleum activities must be reused, recycled or removed to a facility that can lawfully accept the waste under the *Environmental Protection Act 1994*.

Condition 55

If no viable alternative exists, solid general waste may be disposed of on site at a facility designed to receive waste at a rate of less than 50t per year only if it is:

- (a) disposed of into a waste disposal trench;
- (b) consolidated, compacted and covered with a layer of inert material following placement of the waste into the trench;
- (c) managed in a way that prevents scavenging and access by vermin;
- (d) managed in a way that prevents or contains wind blown litter; and
- (e) managed in a way that prevents or controls **leachate** generated from the activity.

Condition 56

Waste, including vegetation, must not be burnt.

Condition 57 - Regulated Waste

Regulated waste must be removed and transported from the site by a person who holds a current authority to transport such wastes to a facility that is lawfully able to accept the waste under the *Environmental Protection Act 1994*.

Condition 58

Regulated waste generated in carrying out the petroleum activities can be temporarily stored on the site awaiting removal provided:

- (a) it is stored in a place and circumstance in which there is minimal risk of causing contamination to land or waters or a fire hazard; and
- (b) each container of regulated waste stored awaiting movement off site is clearly marked to identify the contents.

Condition 59

A record of all regulated waste (excluding trackable waste) must be kept detailing the following information:

- (a) date of pickup of waste;
- (b) description of waste;
- (c) quantity of waste;
- (d) origin of waste; and
- (e) destination of waste.

Condition 60 - Sewage

Disposal of sewage effluent must not cause environmental nuisance or material or serious environmental harm.

Condition 61

Sewage treatment works on the site must not exceed a combined peak design capacity to treat sewage of more than 21 **equivalent persons**.

Condition 62 — Monitoring

The holder of the environmental authority must:

- (a) develop a monitoring program that will demonstrate compliance with the conditions of the environmental authority;
- (b) document monitoring and inspections carried out under the monitoring program and any actions taken; and
- (c) record, compile and keep for a minimum of seven (7) years all monitoring results and data.

Condition 63 - Complaints

The holder of the environmental authority must:

- (a) when the administering authority advises the holder of a complaint that the administering authority does not consider to be frivolous, vexatious or based on a mistaken belief alleging nuisance (e.g. caused by dust or noise), investigate the complaint and advise the administering authority of the action proposed or undertaken in relation to the complaint;
- (b) if the administering authority is not satisfied with the proposed or completed action, undertake monitoring or other action requested by the administering authority; and
- (c) maintain a record of complaints and incidents causing environmental harm and actions taken in response to the complaints or incidents for a minimum of seven (7) years.

Condition 64 - Rehabilitation

As soon as practicable after the **end** of petroleum activities that have caused significant disturbance to land, the holder of the environmental authority must:

- (a) remediate contaminated land caused by petroleum activities in accordance with EP Act requirements and this authority; and
- (b) undertake works to establish a safe, **stable**, non polluting landform similar to that of surrounding undisturbed areas, including where relevant:
 - i. backfilling any voids and trenches;
 - ii. neutralising and /or encapsulating any acid producing or potentially acid producing material;
 - iii. removing or encapsulating in low permeability material saline residues from evaporation ponds;

- iv. re-establishing surface drainage lines;
- v. minimising the potential for slumping, subsidence or erosion;
- vi. reinstating the top layer of the soil profile;
- vii. respreading any cleared vegetation; and
- viii. promoting establishment of vegetation of similar species composition and density of cover to the surrounding undisturbed land;

unless the holder has the written consent of the landowner/holder and the administering authority.

Condition 65 - Maintenance of Land Rehabilitation

Monitoring and maintenance of rehabilitated areas must take place to ensure and demonstrate:

- (a) stability of landforms;
- (b) erosion control measures remain effective;
- (c) stormwater runoff and seepage from rehabilitated areas does not negatively affect the environmental values of any waters;
- (d) plants show healthy growth and recruitment is occurring; and
- (e) rehabilitated areas are free of any **declared pest plants**.

Condition 66 - Rehabilitation Success

Rehabilitation can be considered successful when the site can be managed for its designated land-use (either similar to that of surrounding undisturbed areas or as otherwise agreed in a written document with the landowner/holder and administering authority) without any greater management input than for other land in the area being used for a similar purpose and there is evidence that the rehabilitation has been successful for at least three (3) years.

Condition 67 - Decommissioning Pipelines

Decommission inactive buried pipelines by in-situ decommissioning (abandonment in place).

Condition 68

Prior to pipelines and equipment being disconnected they must be drained or vented and cleaned via purging or flushing.

Condition 69

Any water used for purging or flushing pipelines must be contained in dams on site, tested and either:

- (a) directly reused where suitable for petroleum activities;
- (b) treated so that it meets water quality criteria for the intended reuse; or

- (c) removed from the site for disposal or treatment at an appropriately authorised facility;
- Or
- (d) disposed of via evaporation in a suitably lined pond.

Condition 70 — Infrastructure

All above ground **infrastructure** used for the petroleum activities must be removed prior to surrender of the environmental authority, except where it is to remain under the authority of the *Petroleum and Gas (Production and Safety) Act 2004*;, or with the written agreement of the administering authority and the post petroleum authority landowner/holder.

Condition 71 —Transition of Petroleum Authority

The holder of the environmental authority must take responsibility for the rehabilitation of any disturbance to land undertaken as part of a petroleum activity on a petroleum authority that has *been* transitioned (all or in part) due to the grant of a new petroleum authority over that land which now forms part of the current project.

APPENDIX A - Definitions

Note: Where a term is not defined in this Authority, the definition in the *Environmental Protection Act 1994*, its regulations and Environmental Protection Policies or the *Petroleum and Gas (Production and Safety) Act 2004* and its regulations must be used in that order

Accepted engineering standards, in relation to dams, means those standards of design, construction, operation and maintenance that are broadly accepted within the profession of engineering as being good practice for the purpose and application being considered. In the case of dams, the most relevant documents would be publications of the Australian National Committee on Large Dams (ANCOLD), guidelines published by Queensland government departments and relevant Australian and New Zealand Standards.

Administering authority means:

- a) for a matter, the administration and enforcement of which has been devolved to a local government under section 514 of the *Environmental Protection Act 1994* -the local government; a
- b) for all other matters - the Chief Executive of the Department of Environment and Resource Management; or
- c) another State Government Department, Authority, Storage Operator, Board or Trust, whose role is to administer provisions under other enacted legislation.

Appropriately qualified person means a person who has professional qualifications, training, skills or experience relevant to the nominated subject matter and can give authoritative assessment, advice and analysis to performance relative to the subject matter using the relevant protocols, standards, methods or literature.

Archaeological artefact means:

- (a) any artefact that is evidence of an aspect of Queensland's history, whether it is located in, on or below the surface of land, and not
- (b) a thing that is Aboriginal cultural heritage under the *Aboriginal Cultural Heritage Act 2003* or Torres Strait Islander cultural heritage under the *Torres Strait Islander Cultural Heritage Act 2003*.

Archaeological investigation means a physical investigation of the place carried out by a person or persons with recognised qualifications, experience or standing in historical archaeology, mining history, cultural heritage management, or related discipline for the purpose of investigating, recording or conserving archaeological artefacts on the place.

Archaeological place means a place entered in the Queensland heritage register under Part 5 of the *Queensland Heritage Act 1992*.

Assessed or assess by a suitably qualified and experienced person in relation to a hazard assessment of a dam means that a statutory declaration has been made by that person and, when taken together with any attached or appended documents referenced in that declaration, all of the following aspects are addressed and are sufficient to allow an independent audit at any time:

- (a) what has been assessed and the precise nature of that assessment;
- (b) the relevant legislative, regulatory and technical criteria on which the assessment has been based;
- (c) the relevant data and facts on which the assessment has been based, the source of that material, and the efforts made to obtain all relevant data and facts; and
- (d) the reasoning on which the assessment has been based using the relevant data and facts, and the relevant criteria.

Associated water means underground water taken or interfered with, if the taking or interference happens during the course of, or results from, the carrying out of another activity authorised under a petroleum authority, such as producing petroleum from a well, and includes water also known as produced formation water. The term includes all contaminants suspended or dissolved in the water.

Associated works in relation to a dam means:

- (a) operations of any kind and all things constructed, erected or installed for that dam; and
- (b) any land used for those operations.

Background noise level means the sound pressure level, measured in the absence of the noise under investigation, as the $L_{A90,T}$ being the A-weighted sound pressure level exceeded for 90 percent of the measurement time period T of not less than 15 minutes, using Fast response.

Bed and banks for a watercourse or wetland means land over which the water of the watercourse or wetland normally flows or that is normally covered by the water, whether permanently or intermittently; but does not include land adjoining or adjacent to the bed or banks that is from time to time covered by floodwater.

Beneficial use means:

1. with respect to dams, that the current or proposed owner of the land on which a dam stands, has found a use for that dam that is:
 - (a) of benefit to that owner in that it adds real value to their business or to the general community,
 - (b) in accordance with relevant provisions of the *Environmental Protection Act 1994*,
 - (c) sustainable by virtue of written undertakings given by that owner to maintain that dam, and
 - (d) the transfer and use have been approved or authorised under any relevant legislation; or
2. with respect to associated water, see Environmental Protection Agency's Operational Policy *Management of water produced in association with petroleum activities (associated water)* and *Notice of decision to approve a resource for beneficial use — associated water* which can be accessed on Department of Environment and Resource Management's website at www.derm.qld.gov.au.

Bund or bunded in relation to spill containment systems for fabricated or manufactured tanks or containers designed to a recognised standard means an embankment or wall of brick, stone, concrete or other impervious material which may form part or all of the perimeter of a compound and provides a barrier to retain liquid. Since the bund is the main part of a spill containment system, the whole system (or bunded area) is sometimes colloquially referred to within industry as the bund. The bund is designed to contain spillages and leaks from liquids used, stored or processed above ground and to facilitate clean-up operations. As well as being used to prevent pollution of the receiving environment, bunds are also used for fire protection, product recovery and process isolation.

Certification or certified by a suitably qualified and experienced person in relation to a **design plan** or an annual report regarding dams, means that a statutory declaration has been made by that person and, when taken together with any attached or appended documents referenced in that declaration, all of the following aspects are addressed and are sufficient to allow an independent audit at any time:

- (a) exactly what is being certified and the precise nature of that certification;
- (b) the relevant legislative, regulatory and technical criteria on which the certification has been based;
- (c) the relevant data and facts on which the certification has been based, the source of that material, and the efforts made to obtain all relevant data and facts; and
- (d) the reasoning on which the certification has been based using the relevant data and facts, and the relevant criteria.

Clearing means:

- (a) in relation to grass, scat or bush - the removal of vegetation by disturbing root systems and exposing underlying soil (including burning), but does not include—
 - i. the flattening or compaction of vegetation by vehicles if the vegetation remains living; or
 - ii. the slashing or mowing of vegetation to facilitate access tracks; or
 - iii. the clearing of noxious or introduced plant species; and
- (b) in relation to trees - cutting down, ringbarking, pushing over, poisoning or destroying in any way

Commercial place means a work place used as an office or for business or commercial purposes which is not part of the petroleum activities and does not include employees accommodation or public roads.

Construction in relation to a dam includes building a new dam and modifying or lifting an existing dam.

Cultural heritage significance means aesthetic, architectural, historical, scientific, social or other significance, to the present generation or past or future generations, as assessed against the following criteria:

- (a) the place is important in demonstrating the evolution or pattern of Queensland's history;
- (b) the place demonstrates rare, uncommon or endangered aspects of Queensland's cultural heritage;
- (c) the place has potential to yield information that will contribute to an understanding of Queensland's history;
- (d) the place is important in demonstrating the principal characteristics of a particular class of cultural places;
- (e) the place is important because of its aesthetic significance;
- (f) the place is important in demonstrating a high degree of creative or technical achievement at a particular period;
- (g) the place has a strong or special association with a particular community or cultural group for social, cultural or spiritual reasons;
- (h) the place has a special association with the life or work of a particular person, group or organisation of importance in Queensland's history.

Dam means a land-based structure (including a **levee**, dyke or bund) or a void that is intended or used to contain, divert or control **flowable substances**, and includes any substances that are thereby contained or controlled by that land-based structure or void and **associated works**. However; a dam does not mean a fabricated or manufactured tank or container designed to a recognised standard, nor does a dam mean a land-based structure where that structure is designed to an Australian Standard such as a bund designed for spill containment to AS1940.

Declared pest plants are listed in Schedule 2 of the *Land Protection (Pest and Stock Route Management) Regulation 2003*.

Design plan is the documentation required to describe the physical dimensions of the dam, the materials and standards to be used for construction of the dam, and the criteria to be used for operating the dam. The documents must include design and investigation reports, specifications and certifications, together with the planned decommissioning and rehabilitation works and outcomes. A design plan may include 'as constructed' drawings.

Discharge area is an area in the landscape where the net movement of groundwater is out of the aquifer. This may be expressed by waterlogging where groundwater discharges at the soil surface because of seepage or salting because of evaporation.

Dispersible soils are structurally unstable soils that readily breakdown into their constituent particles in water (e.g. the clay material disintegrates into particles less than 2 microns across within 24 hours when soil crumbs are submerged in distilled water). These soils are also known as sodic soils and have a high percentage of sodium ions (in soluble or exchangeable form).

Ecosystem functioning means the interactions between and within living and non-living components of an ecosystem and generally correlates with the size, shape and location of an area of vegetation.

End means the stopping of the particular activity that has caused a significant disturbance in a particular area. It refers to, among other things, the end of a seismic surveyor the end of a drilling operation. It does not refer to the end of all related activities such as rehabilitation. In other words, it does not refer to the 'completion' of the petroleum activity, the time at which the petroleum authority ends or the time that the land in question ceases to be part of an authority.

Equivalent person means an equivalent person as defined in Item 63 of Schedule 2 in the *Environmental Protection Regulation 2008*.

Evaporation pond means a dam specifically designed for the purpose of disposing of a liquid via evaporation.

Fill means any kind of material in solid form (whether or not naturally occurring) capable of being deposited at a place but does not include material that forms a part of, or is associated with, a structure constructed in a watercourse, wetland or spring including a budge, road, causeway, pipeline, rock revetment, drain outlet works, erosion prevention structure or fence.

Financial assurance means a security deposit, either cash or a bank guarantee, held by the administering authority to cover the potential costs of preventing or minimising environmental harm from, or rehabilitating areas significantly disturbed by, the petroleum activities.

Flowable substance means matter or a mixture of materials which can flow under conditions potentially affecting that substance. Constituents of a flowable substance can include water, other fluids or solids, or a mixture that includes water and any other fluids or solids either in solution or suspension.

Foreseeable future is the period used for assessing the total probability of an event occurring. Permanent structures and ecological sustainability should be expected to still exist at the end of a 150 year foreseeable future with an acceptably low probability of failure before that time.

Hazard in relation to a dam as defined means the potential for environmental harm resulting from the collapse or failure of the dam to perform its primary purpose of containing, diverting or controlling flowable substances.

Hazard category means the level of hazard (low, significant or high) assigned to a dam as a result of an assessment against tables and other criteria in the *Manual for Assessing Hazard Categories and Hydraulic Performance of Dams (Version 1.0, 2008)* published by the Environmental Protection Agency (Department of Environment and Resource Management) on its website.

Heritage place means any place that may be of **cultural heritage significance**, or any place with potential to contain **archaeological artefacts** that are an important source of information about Queensland's history.

High bank means the defining terrace or bank or, if no bank is present, the point on the active floodplain, which confines the average annual peak flows in a watercourse.

Highly erodible soils means very unstable soils that are generally described as Sodosols with hard-setting, fine sandy loam to silty clay loam surfaces (solodics, solodised solonetz and solonetz) or soils with a dispersible layer located less than 25cm deep or soils less than 25cm deep.

Hydraulic performance means the capacity of a **regulated dam** to contain or safely pass flowable substances based on a probability (AEP) of performance failure specified for the relevant hazard category in the *Manual for Assessing Hazard Categories and Hydraulic Performance of Dams (Version 1.0, 2008)* published by the Department of Environment and Resource Management on its website.

Infrastructure means water storage dams, roads and tracks, equipment, buntings and other structures built for the purpose and duration of the conduct of the petroleum activities, but does not include other facilities required for the long term management of the impact of those activities or the protection of potential resource. Such other facilities include dams other than water storage dams (e.g. evaporation ponds), pipelines and assets that have been decommissioned, rehabilitated and lawfully recognised as being subject to subsequent transfer with ownership of the land.

L_{A90,adj, 15 min} means the A-weighted sound pressure level exceeded for 90 percent of the measurement time period of 15 minutes, adjusted for noise characteristics including tonality and impulsiveness and measured in the presence of the noise under investigation, using Fast Response.

L_{A10,adj, 15 min} means the A-weighted sound pressure level exceeded for 10 percent of the measurement time period of 15 minutes, adjusted for noise character including tonality and impulsiveness and measured in the presence of the noise under investigation, using Fast Response.

L_{A1,adj, 15 min} means the A-weighted sound pressure level exceeded for 1 percent of the measurement time period of 15 minutes, adjusted for noise character including tonality and impulsiveness and measured in the presence of the noise under investigation, using Fast Response.

Leachate means a liquid that contains soluble, suspended or miscible contaminants likely to have been derived from material which is stored, processed or disposed of on site and which the liquid has passed through or emerged from, or is likely to have passed through or emerged from.

Levee means a dyke or bund that is designed only to provide for the containment and diversion of stormwater or flood flows from a contributing catchment, or containment and diversion of flowable materials resulting from unplanned releases from other works of infrastructure, during the progress of those stormwater or flood flows or those unplanned releases; and does not store any significant volume of water or flowable substances at any other times.

Limited regulated waste means any of the following regulated wastes, asbestos, clinical waste or quarantine waste that has been rendered non-infectious, fish processing waste, food processing waste, poultry processing waste, tyres or treatment tank sludge or residue produced in the carrying out of an activity in relation to sewage treatment and water supply activities.

Noxious means harmful or injurious to health or physical wellbeing.

'Of concern' regional ecosystem means an 'of concern' regional ecosystem identified in the database maintained by the Department of Environment and Resource Management called 'Regional ecosystem description database' containing regional ecosystem numbers and descriptions. The database is available for inspection on the Department of Environment and Resource Management's website at www.epa.qld.gov.au/nature_conservation/biodiversity/regional_ecosystems/

Offensive means causing unreasonable offence or displeasure; is disagreeable to the sense; disgusting, nauseous or repulsive, other than trivial harm.

Overland flow water means water, including floodwater, flowing over land, otherwise than in a watercourse or lake:

- (a) after having fallen as rain or in any other way; or
- (b) after rising to the surface naturally from underground.

Permanent Infrastructure includes any infrastructure (roads, tracks, bridges, culverts, dams, bores, buildings, fixed machinery, hardstand areas, airstrips, helipads, pipelines etc.) which is to be left by agreement with the landowner.

Petroleum authority is:

- (a) a 1923 Act petroleum tenure granted under the *Petroleum Act 1923*; or
- (b) a petroleum authority granted under the *Petroleum and Gas (Production and Safety) Act 2004*; or
- (c) a license, permit, pipeline license, primary license, secondary license or special prospecting authority granted under the *Petroleum (Submerged Lands) Act 1982*.

Regulated dam means any dam in the significant or high hazard category as assessed using the *Manual for Assessing Hazard Categories and Hydraulic Performance of Dams (Version 1.0, 2008)* published by the Department of Environment and Resource Management on its website.

Regulated waste means non-domestic waste mentioned in Schedule 7 of the *Environmental Protection Regulation 2008* (whether or not it has been treated or immobilised), and includes-

- (a) for an element - any chemical compound containing the element; and
- (b) anything that has contained the waste.

Release of a contaminant into the environment includes:

- (a) to deposit, discharge, emit or disturb the contaminant; and
- (b) to cause or allow the contaminant to be deposited, discharged, emitted or disturbed; and
- (c) to allow the contaminant to escape; and
- (d) to fail to prevent the contaminant from escaping.

Sensitive place means:

- (a) a dwelling (including residential allotment, mobile home or caravan park, residential marina or other residential premises, motel, hotel or hostel);
- (b) a library, childcare centre, kindergarten, school, university or other educational institution;
- (c) a medical centre, surgery or hospital;
- (d) a protected area;
- (e) a public park or garden that is open to the public (whether or not on payment of money) for use other than for sport or *organised entertainment*.

Significantly disturbed land or **significant disturbance to land** means land that is:

- (a) contaminated land; or
- (b) disturbed and human intervention is needed to rehabilitate it:
 - i. to a state required under this authority; or
 - ii. if the authority does not require the land to be rehabilitated to a particular state - to its state immediately before the disturbance.

Examples of a significant disturbance to land:

- (a) areas where soil has been compacted, removed, covered, exposed or stockpiled;
- (b) areas where vegetation has been removed or destroyed to an extent where the land has been made susceptible to erosion;
- (c) areas where land use suitability or capability has *been* diminished;
- (d) areas within a watercourse, wetland, or spring where petroleum activities have occurred causing the loss of habitat or a decline in ecological processes and requiring human intervention to restore or stabilise the disturbed area and/or protect the quality of the water downstream of the disturbance;
- (e) areas submerged by waste or water;
- (f) areas under temporary Infrastructure. Temporary infrastructure includes any infrastructure (roads, tracks, bridges, culverts, dams, bores, buildings, fixed machinery, hardstand areas, airstrips, helipads etc.) which is to be removed after petroleum activities have ceased; or
- (g) areas where land has become contaminated land and a suitability statement has not been issued.

However, for the purpose of this authority the following areas are not significant/ disturbed:

- (a) areas of the petroleum authority (e.g. roads or tracks which provide access to the petroleum authority);
- (b) areas previously significantly disturbed which have been rehabilitated to the administering authority's satisfaction;
- (c) areas under permanent infrastructure (e.g. roads, bridges, buildings) as agreed by the administering authority and landholder;
- (d) areas that were significantly disturbed prior to the grant of the petroleum authority, unless those areas are re-disturbed by the petroleum authority holder during the course of carrying out the petroleum activities or were conducted on a petroleum authority that was replaced by the current authority (e.g. through conditional surrender or the transition from an authority to prospect to a petroleum lease).

Site means the area within the petroleum authority or authorities to which the environmental authority relates.

Spring means the land to which water rises naturally from below the ground and the land over which the water then flows.

Stable in relation to land means landform dimensions are or will be stable within **tolerable limits** now and in the **foreseeable future**. Stability includes consideration of geotechnical stability, settlement and consolidation allowances, bearing capacity (trafficability), erosion resistance and geochemical stability with respect to seepage, leachate and related contaminant generation.

State heritage place means a place entered in the Queensland heritage register under Part 4 of the *Queensland Heritage Act 1992*.

Suitably qualified and experienced person in relation to dams means one who is a Registered Professional Engineer of Queensland (RPEQ) under the provisions of the *Professional Engineers Act 1988*, OR registered as a National Professional Engineer (NPER) with the Institution of Engineers Australia, OR holds equivalent professional qualifications to the satisfaction of the administering authority for the Act; AND the administering authority for the Act is satisfied that person has knowledge, suitable experience and demonstrated expertise in relevant fields, as set out below

(a) knowledge of engineering principles related to the structures, geomechanics, hydrology, hydraulics, chemistry and environmental impact of dams; and

(b) a total of five (5) years of suitable experience and demonstrated expertise in the geomechanics of dams with particular emphasis on stability, geology and geochemistry; and

(c) a total of five (5) years of suitable experience and demonstrated expertise each, in three (3) of the following categories:

- i. investigation and design of dams;
- ii. construction, operation and maintenance of dams;
- iii. hydrology with particular reference to flooding, estimation of extreme storms, water management or meteorology;
- iv. hydraulics with particular reference to sediment transport and deposition, erosion control, beach processes;
- v. hydrogeology with particular reference to seepage, groundwater;
- vi. solute transport processes and monitoring thereof;
- vii. dam safety.

Thing means a material object without life or consciousness or some entity, object or *creature* which is not or cannot be specifically designated or precisely described.

Threatening processes are processes, features and actions that can have a detrimental effect upon the health and viability of an area of vegetation. For example, altered hydrology, land use practices, Invasion by pest and weed species, land degradation, edge effects and fragmentation.

Tolerable limits means a range of parameters regarded as being sufficient to meet the objective of protecting relevant environmental values. For example, a range of settlement for a tailings capping, rather than a single value, could still meet the objective of draining the cap quickly, preventing pondage and limiting infiltration and percolation.

Topsoil means the surface (top) layer of a soil profile which is more fertile, darker in colour, better structured and supports greater biological activity than underlying layers. The surface layer may vary in depth depending on soil forming factors, including parent material, location and slope, but generally is not greater than about 300mm in depth from the natural surface.

Void means any man-made, open excavation in the ground (includes borrow pits, drill sumps, frac pits, flare pits, cavitation pits and trenches).

Waters includes all or any part of a creek, river, stream, lake, lagoon, pond, swamp, wetland, spring, unconfined surface water, unconfined water in natural or artificial watercourses, bed and bank of any waters, dams, non-tidal or tidal waters (including the sea), stormwater channel, stormwater drain, roadside gutter, stormwater run-off, and underground water.

Watercourse is a creek, river or stream

(a) in which water flows intermittently or permanently in a visibly defined channel, whether artificial, artificially improved or natural: and


(b) that has evidence of biological dependence on any water that flows in the creek, river or stream or on the banks or bed.

Wetland means an area shown as a wetland on a 'Map of referable wetlands', a document approved by the chief executive (environment). A map of referable wetlands can be viewed at

www.derm.qld.gov.au

Wild river declaration is a statutory instrument under the *Wild Rivers Act 2005*. A declaration lists the relevant natural values to be preserved and delineates certain parts of the wild river area and the different constraints that may apply in these areas. With reference to environmental authorities for petroleum, each declaration also specifies conditions to be included in a new authority if the activity is to be located within the wild river area

APPENDIX B – Map of ATP745P

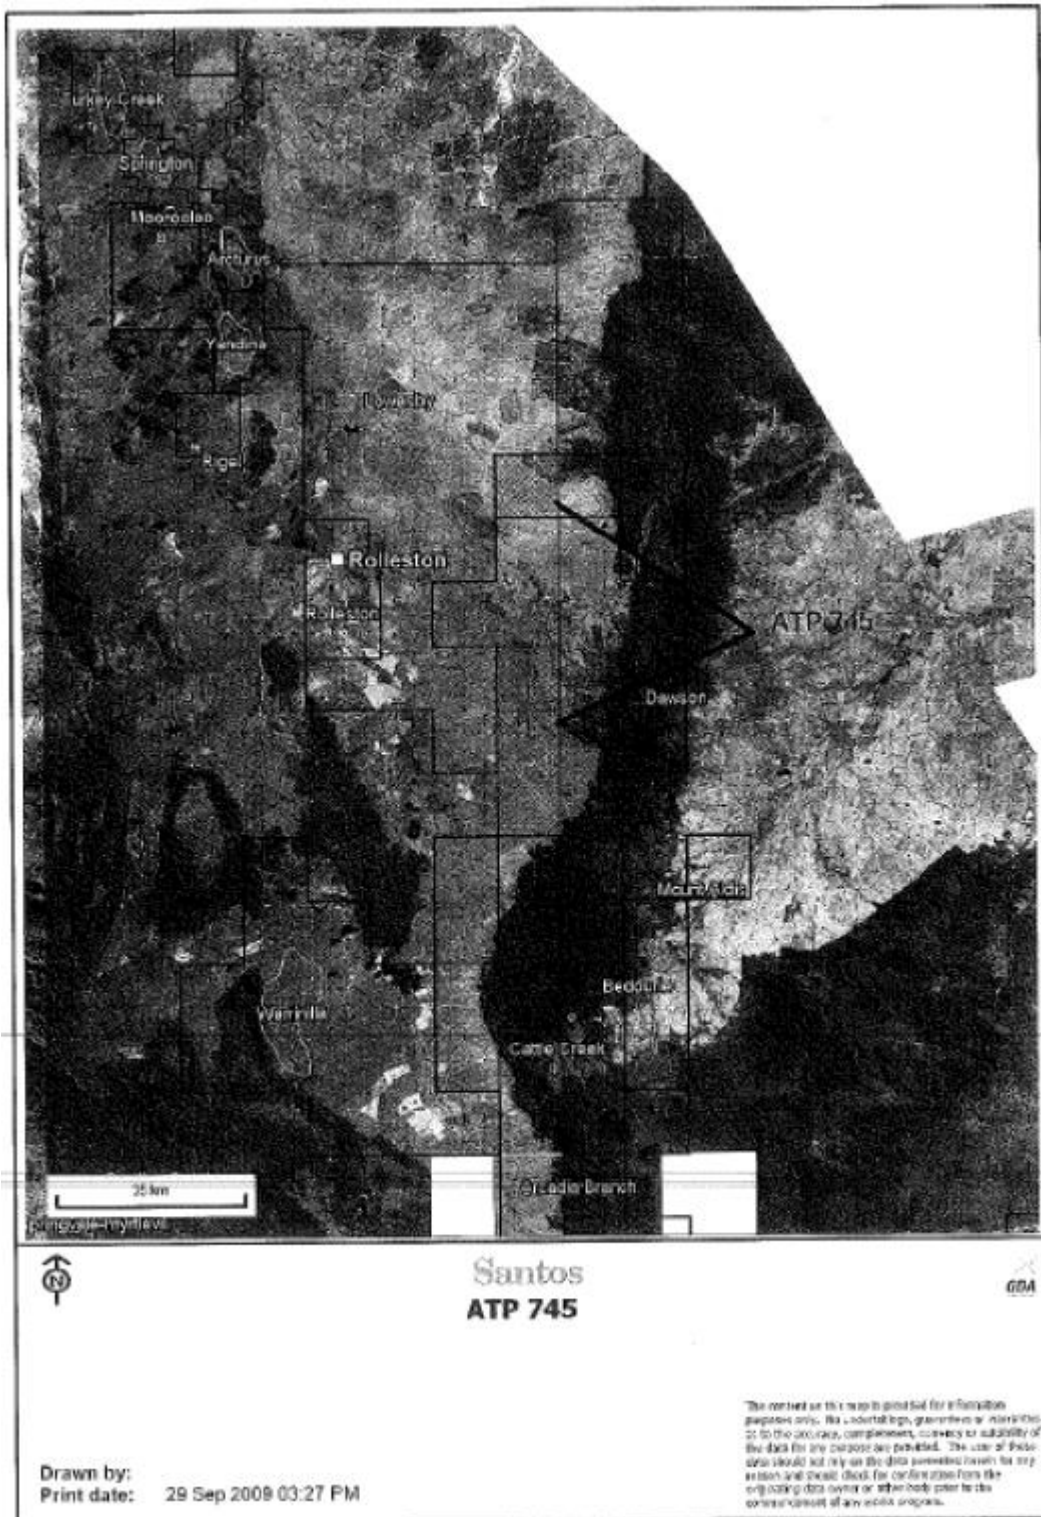

APPENDIX C — ENVIRONMENTALLY SENSITIVE AREAS

Category A and Category B environmentally sensitive areas

Category A and Category B environmentally sensitive areas are listed in Section 25 and 26 respectively of the *Environmental Protection Regulation 2008*.

Category C environmentally sensitive areas

LAND AREA CLASSIFICATION	ADMINISTERING LEGISLATION	ADMINISTERING AUTHORITY
Nature Refuges and Resource Reserves	Nature Conservation Act 1992	Department of Environment and Resource Management
Koala Habitat Area	Nature Conservation (koala) Conservation Plan 2006	Department of Environment and Resource Management
An area identified as essential habitat by the DERM for a species of wildlife listed as endangered, vulnerable, near threatened or rare under the Nature Conservation Act 1992.	Nature Conservation Act 1992	Department of Environment and Resource Management
Declared Catchment Areas	Water Act 2000	Department of Environment and Resource Management And/or Relevant Storage Operator Board
Former Designated Landscape Area-Stanbroke Pastoral Holding	Aboriginal Cultural Heritage Act 2003	Department of Environment and Resource Management
Areas under Part 5 Division 2 of the Aboriginal Cultural Heritage Act 2003 and Torres Strait Islander Cultural Heritage Act 2003	Aboriginal Cultural Heritage Act 2003 Torres Strait Islander Cultural Heritage Act 2003	Department of Environment and Resource Management
State Forest or Timber Reserves	Forestry Act 1959	Department of Environment and Resource Management
DPI Research Sites	Nil	Department of Employment, Economic Development and Innovation
Areas of land occupied by the Bureau of Sugar Experiment Stations	Sugar Industry Act 1999	Department of Environment and Resource Management
Coastal Management Districts	Coastal Protection and Management Act 1995	Department of Environment and Resource Management
Declared Areas	Sections 17, 18 and 19a of the Vegetation Management Act 1999	Department of Environment and Resource Management
An area shown as a wetland on a "map of referable wetlands"	Environmental Protection Act 1994	Department of Environment and Resource Management
Reserves under the Land Act 1994	Land Act 1994	Department of Environment and Resource Management
An "Of Concern" regional ecosystem identified in the database maintained by the EPA called "Regional ecosystem description database" containing regional ecosystem numbers and descriptions.	Nil	Department of Environment and Resource Management

Important Note: Regional ecosystem classification is determined according to the Queensland Herbarium *Biodiversity Status Classification*. Information on ERE's is maintained by the DERM on the Regional Ecosystem Description Database

END of PART A of ENVIRONMENTAL AUTHORITY

Part B

Legislative Requirements and Conditions for the Santos GLNG Gas Field Development Project

Any condition with * is a Coordinator General Stated Condition for the Santos GLNG Gas Field Development Project.

Schedule A- General

A1 The activities in Condition A1-1 are not authorised on ATP 745. Conditions A1 to K3 do not apply under this Environmental Authority.

Note: Due to the expiry of the Coordinator General's Report on 4 December 2019, for the EIS for the Santos GLNG Gas Field Development Project, the conditions listed in Part B of this Environmental Authority have been included. These activities and conditions are not authorised on an ATP.

Scoping Table Conditions

A1-1 This environmental authority authorises the carrying out of the following resource activity(ies):

- a) the petroleum activities listed in Schedule A, Table 1 – Scale and Intensity for the Activities to the extent they are carried out in accordance with the activity's corresponding scale and intensity;
- b) the following Environmentally relevant activities:
 - i. **Resource Activity, Schedule 2A, 03:** A petroleum activity that is likely to have a significant impact on a category A or B environmentally sensitive area.
 - ii. **Resource Activity, Schedule 2A, 06:** A petroleum activity carried out on a site containing a high hazard dam or a significant hazard dam.
 - iii. **Resource Activity, Schedule 2A, 08:** A petroleum or GHG storage activity, other than items 1 to 7, that includes an activity from Schedule 2 with an AES.
 - iv. **Resource Activity, Ancillary 55-** Other waste reprocessing or treatment, 2: operating a facility for receiving and reprocessing or treating, in a year, the following quantity of category 2 regulated waste,(c) more than 10,000t.
 - v. **Resource Activity, Ancillary 62 -** Resource recovery and transfer facility operation, 1: operating a facility for receiving and sorting, dismantling, baling or temporarily storing, (c) category 2 regulated waste.
 - vi. **Resource Activity, Ancillary 63 -**Sewage treatment, 1: operating sewage treatment works, other than no-release works, with a total daily peak design capacity of, (a-i) 21 to 100EP if treated effluent is discharged from the works to an infiltration trench or through an irrigation scheme.
 - vii. **Resource Activity, Ancillary 63 -**Sewage treatment, 1: operating sewage treatment works, other than no-release works, with a total daily peak design capacity of, (b-i) more than 100 but not more than 1,500EP, if treated effluent is discharged from the works to an infiltration trench or through an irrigation scheme.
 - viii. **Resource Activity, Ancillary 64 -** Water treatment, 3: treating 10ML or more raw water in a day.
 - ix. **Resource Activity, Ancillary 8-** Chemical storage, 3: storing more than 500m3 of chemicals of class C1 or C2 combustible liquids under AS 1940 or dangerous goods class 3 under subsection (1)(c).

(c) **incidental activities** that are not otherwise **specified relevant activities**.

Schedule A, Table 1 – Scale and Intensity for the Activities

Infrastructure	Scale (Maximum number of activities)	Intensity (Maximum size of disturbed area during construction)
Wells	219	Up to 329 ha
Compressor Stations (below the threshold of 500kg of fuel per hour)	2	Up to 16 ha
Regulated Structure(s)	8	Up to 128 ha
Water Treatment Facilities	2	Up to 20 ha
Stimulation activities	All wells are subject to stimulation activities	
Sewage Treatment plants	As Required	As Required
Gathering Lines /transmission pipelines	As Required	As Required
Access roads	As Required	Access road width: up to 30m

A2* The resource activities in condition (A1-1) are authorised subject to the conditions of this environmental authority.

A3* This environmental authority authorises a relevant act¹ to occur only to the extent that:

- (a) the relevant act is an ordinary consequence of carrying out the resource activities authorised by this environmental authority in accordance with its conditions; or
- (b) the relevant act is specifically authorised by the conditions of this environmental authority and carrying out an activity which results in the relevant act does not contravene the conditions of this authority.

Monitoring

A4* All monitoring required must be undertaken by a **suitably qualified person**.

A5* If requested by the **administering authority** in relation to investigating a complaint, monitoring must be commenced within 10 **business days**.

A6* All laboratory analyses and tests required must be undertaken by a laboratory that has **NATA accreditation** for such analyses and tests.

A7* Notwithstanding condition (A6), where there are no NATA accredited laboratories for a specific analyte or substance, then duplicate samples must be sent to at least two separate laboratories for independent testing or evaluation.

¹ See section 493A of the *Environmental Protection Act 1994*

- A8*** Monitoring and sampling must be carried out in accordance with the requirements of the following **documents** (as relevant to the sampling being undertaken), as amended from time to time:
- (a) for waters and aquatic environments, the Queensland Government's Monitoring and Sampling Manual 2009 Environmental Protection (Water) Policy 2009
 - (b) for groundwater, Groundwater Sampling and Analysis A Field Guide (2009:27 GeoCat #68901)
 - (c) for noise, the Environmental Protection Regulation 2008
 - (d) for air, the Queensland Air Quality Sampling Manual and/or Australian Standard 4323.1:1995 Stationary source emissions method 1: Selection of sampling positions, as appropriate for the relevant measurement
 - (e) for soil, the Guidelines for Surveying Soil and Land Resources, 2nd edition (McKenzie et al. 2008), and/or the Australian Soil and Land Survey Handbook, 3rd edition (National Committee on Soil and Terrain, 2009)
 - (f) for dust, **Australian Standard AS3580**.

Contingency Procedures for Emergency Environmental Incidents

- A9*** Petroleum activities involving **significant disturbance to land** cannot commence until the development of written contingency procedures for emergency environmental incidents which include, but are not necessarily limited to:
- (a) A clear definition of what constitutes an environmental emergency incident or near miss for the petroleum activity.
 - (b) Consideration of the risks caused by the petroleum activity including the impact of flooding and other natural events on the petroleum activity.
 - (c) Response procedures to be implemented to prevent or minimise the risks of **environmental harm** occurring.
 - (d) The practices and procedures to be employed to restore the environment or mitigate any environmental harm caused.
 - (e) Procedures to investigate causes and impacts including impact monitoring programs for releases to **waters** and/or land.
 - (f) Training of staff to enable them to effectively respond.
 - (g) Procedures to notify the administering authority, local government and any potentially impacted landholder.

Maintenance of Plant and Equipment

- A10*** All plant and equipment must be maintained and operated in their proper and effective condition.
- A11*** The following infrastructure must be signed with a unique reference name or number in such a way that it is clearly observable:
- (a) regulated dams and **low consequence dams**
 - (b) **exploration, appraisal and development wells**
 - (c) water treatment facilities
 - (d) sewage treatment facilities

- (e) specifically authorised discharge points to air and waters
- (f) any chemical storage facility associated with the environmentally relevant activity of chemical storage
- (g) field compressor stations
- (h) central compressor stations
- (i) gas processing facilities; and
- (j) pipeline compressor stations.

A12* Measures to prevent fauna being harmed from entrapment must be implemented during the construction and operation of well infrastructure, dams and pipeline trenches.

Complaints

A13* Petroleum activities must not cause **environmental nuisance** at a **sensitive place**, other than where an **alternative arrangement** is in place.

Documentation

A14* A certification must be prepared by a suitably qualified person within 30 business days of completing every plan, procedure, program and report required to be developed under this environmental authority, which demonstrates that:

- (a) relevant material, including current published guidelines (where available) have been considered in the written document
- (b) the content of the written document is accurate and true; and
- (c) the document meets the requirements of the relevant conditions of the environmental authority.

A15* All plans, procedures, programs, reports and methodologies required under this environmental authority must be written and implemented.

A16* All documents required to be developed under this environmental authority must be kept for five (5) years.

A17* All documents required to be prepared, held or kept under this environmental authority must be provided to the administering authority upon written request within the requested timeframe.

A18* A record of all complaints must be kept including the date, complaint's details, source, reason for the complaint, description of investigations and actions undertaken in resolving the complaint.

Third Party Audit

A19* A **third party auditor**, nominated by the holder of this environmental authority and accepted by the administering authority, must audit compliance with the conditions of this environmental authority at a minimum frequency of every three (3) years.

- A20*** Notwithstanding condition (A19), and prior to undertaking the third party audit, the scope and content of the third party audit can be negotiated with the administering authority.
- A21*** An audit report must be prepared and certified by the third party auditor presenting the findings of each audit carried out.
- A22*** Any recommendations arising from the audit report must be acted upon by:
- (a) investigating any non-compliance issues identified; and
 - (b) as soon as reasonably practicable, implementing measures or taking necessary action to ensure compliance with the requirements of this environmental authority.
- A23*** A written response must be attached to the audit report detailing the actions taken or to be taken on stated dates:
- (a) by the holder to ensure compliance with this environmental authority; and
 - (b) to prevent a recurrence of any non-compliance issues identified.
- A24*** The audit report required by condition (A21) and the written response to the audit report required by condition (A23) must be submitted with the subsequent annual return.

Schedule B – Water

General

- B1*** Contaminants must not be directly or indirectly released to any waters except as permitted under this environmental authority.
- B2*** The extraction of groundwater as part of the petroleum activities from underground aquifers must not directly or indirectly cause environmental harm to any **watercourse** or **wetland**.

Works in Watercourses and Wetlands

- B3*** Only construction or maintenance of **linear infrastructure** is permitted in or within a general ecologically significant wetland or in a watercourse.
- B4*** The construction and/or maintenance of linear infrastructure that will result in significant disturbance in or on the **bed and banks** of a watercourse or within a **general ecologically significant wetland** must be conducted in accordance with the following order of preference:
- (a) conducting works in times when there is no water present;
 - (b) conducting works in times of no flow;
 - (c) conducting works in times of flow but in a way that does not impede low flow.
- B5*** The construction and maintenance of linear infrastructure authorised under condition (B3) must comply with the water quality limits specified in *Schedule B, Table 1 Water release limits for Construction or Maintenance of Linear Infrastructure*.

Schedule B, Table 1 - Water Release limits for Construction or Maintenance of Linear Infrastructure.

Water Quality Parameters	Units	Water Quality Limits
Turbidity	NTU	For a general ecologically significant wetland, if background water turbidity is above 45 NTU, no greater than 25% above background water turbidity measured within a 50m radius of the construction or maintenance activity. For a watercourse, if background water turbidity is above 45 NTU, no greater than 25% above background water turbidity measured within 50m downstream of the construction or maintenance activity.
		For a general ecologically significant wetland, if background water turbidity is equal to, or below 45 NTU, a turbidity limit of no greater than 55 NTU applies, measured within a 50m radius of the construction or maintenance activity. For a watercourse, if background water turbidity is equal to, or below 45 NTU, a turbidity limit of no greater than 55 NTU applies, measured within 50m downstream of the construction or maintenance activity.
Hydrocarbons	-	No visible sheen

- B6*** Monitoring must be undertaken at a reasonable frequency to ensure compliance with condition (B5).
- B7*** A register must be kept of all linear infrastructure construction and maintenance activities in a wetland of other environmental value and watercourses, which must include:
- (a) location of the activity (e.g. GPS coordinates (**GDA94**) and watercourse name)
 - (b) estimated flow rate or surface water at the time of the activity
 - (c) duration of work
 - (d) results of impact monitoring carried out under condition (B6).
- B8*** Petroleum activities must occur outside a **wetland of high ecological significance**.
- B9*** Petroleum activities must not negatively impact a wetland of high ecological significance.
- B10*** Linear infrastructure activities, other than linear infrastructure construction and/or maintenance activities, must not change the existing surface water hydrological regime of any general ecologically significant wetland.
- B11*** The construction and/or maintenance of linear infrastructure in any general ecologically significant wetland must not:
- (a) prohibit the flow of surface water in or out of the wetland;
 - (b) impact surface water quality in the wetland unless specifically authorised by this environmental authority;
 - (c) drain the wetland;
 - (d) fill the wetland;
 - (e) impact bank stability; or
 - (f) result in the **clearing** of riparian vegetation outside of the required footprint.

Floodplains

- B12*** Where the petroleum activity is carried out on floodplains the petroleum activity must be carried out in a way that does not:
- (a) concentrate flood flows in a way that will or may cause or threaten an adverse environmental impact; or
 - (b) divert flood flows from natural drainage paths and alter flow distribution; or
 - (c) increase the local duration of floods; or
 - (d) increase the risk of detaining flood flows.

Seepage Monitoring Program

- B13*** A seepage monitoring program must be developed by a suitably qualified person which is commensurate with the site-specific risks of contaminant seepage from containment facilities, and which requires and plans for detection of any seepage of contaminants to groundwater as a result of storing contaminants by no longer than 3 months following the effective date of this environmental authority.
- B14*** The seepage monitoring program required by condition (B13) must include but not necessarily be limited to:
- (a) identification of the containment facilities for which seepage will be monitored;
 - (b) identification of trigger parameters that are associated with the potential or actual contaminants held in the containment facilities as provided for in condition (B15);
 - (c) identification of trigger concentration levels that are suitable for early detection of contaminant releases at the containment facilities;
 - (d) installation of background seepage monitoring bores where groundwater quality will not have been affected by the petroleum activities authorised under this environmental authority to use as reference sites for determining impacts;

- (e) installation of seepage monitoring bores that:
 - i. are within formations potentially affected by the containment facilities authorised under this environmental authority (i.e. within the potential area of impact);
 - ii. provide for the early detection of negative impacts prior to reaching **groundwater dependent ecosystems** bores, or water supply bores;
 - iii. provide for the early detection of negative impacts prior to reaching migration pathways to other formations (i.e. faults, areas of unconformities known to connect two or more formations);
- (f) monitoring of groundwater at each background and seepage monitoring bore at least quarterly for the trigger parameters identified in condition (B15);
- (g) seepage trigger action response procedures for when trigger parameters and trigger levels identified in conditions (B15) and (B14)(c) trigger the early detection of seepage, or upon becoming aware of any monitoring results that indicate potential groundwater contamination;
- (h) a rationale detailing the program conceptualisation including assumptions, determinations, monitoring equipment, sampling methods and data analysis; and
- (i) provides for annual updates to the program for new containment facilities constructed in each annual return period.

B15* Seepage monitoring bores identified in (B14) (b) must be monitored quarterly for the trigger parameter(s) specified in *Schedule B, Table 2 Seepage Monitoring Trigger Parameters*.

Schedule B, Table 2 Seepage Monitoring Trigger Parameters

Parameter	Units	Untreated Coal Seam Water	Permeate	Brine
Static Water Level	m	monitor	monitor	monitor
pH	pH unit	monitor	monitor	monitor
EC	µS/cm	monitor	monitor	monitor
Major Anions (sulphate, chloride)	mg/L	monitor	-	-
Major Cations (calcium, magnesium, sodium and potassium)	mg/L	monitor	-	-

Seepage Monitoring Bore Drill Log

- B16*** A bore drill log must be completed for each seepage monitoring bore in condition (B14) which must include:
- (a) bore identification reference and geographical coordinate location
 - (b) specific construction information including but not limited to depth of bore, depth and length of casing, depth and length of screening and bore sealing details
 - (c) standing groundwater level and water quality parameters including physical parameter and results of laboratory analysis for the possible trigger parameters
 - (d) lithological data, preferably a stratigraphic interpretation to identify the important features including the identification of any aquifers; and
 - (e) target formation of the bore.

Well Testing

- B17*** Subject to condition (B18) and condition (B19), the injection of CSG water or better quality groundwater is authorised in wells that are not exploration, appraisal or development wells, for the purposes of **hydraulic testing**, where such hydraulic tests are undertaken for no more than two (2) consecutive days.
- B18*** The maximum volume of CSG water or better quality groundwater injected for the purposes of hydraulic testing identified in condition (B17) must not exceed 1ML per hydraulic test.
- B19*** Written notification detailing the type and location (GPS coordinates) of any hydraulic testing undertaken in accordance with condition (B17) must be provided to the administering authority at least 10 business days prior to the commencement of the hydraulic test.

Schedule C – Land

General

- C1*** Contaminants must not be directly or indirectly released to land except as permitted under this environmental authority.

Top Soil Management

- C2*** Top soil must be managed in a manner that preserves its biological and chemical properties.

Erosion and Sediment Control

- C3*** For activities involving significant disturbance to land, **control measures** that are commensurate to the site-specific risk of erosion, and risk of sediment release to waters must be implemented to:
- (a) preferentially divert stormwater around **significantly disturbed** land, or allow stormwater to pass through the site in a controlled manner and at non-erosive flow velocities;
 - (b) minimise soil erosion resulting from wind, rain, and flowing water;
 - (c) minimise the duration that disturbed soils are exposed to the erosive forces of wind, rain, and flowing water;
 - (d) minimise work-related soil erosion and sediment runoff; and
 - (e) minimise negative impacts to land or properties adjacent to the activities (including roads).

Land Management

- C4*** Land that has been significantly disturbed by the pipeline activities must be managed to ensure that gully erosion or subsidence do not occur on that land.

Chemical Storage

- C5*** Chemicals and fuels stored, must be effectively contained and where relevant, meet Australian Standards, where such a standard is applicable.

Pipeline Operation and Maintenance

- C6*** Contaminants authorised to be released to land under conditions (C7), (C9), and (C15) must be carried out in a manner that ensures:
- (a) vegetation is not damaged;
 - (b) soil quality is not adversely impacted;
 - (c) there is no surface ponding or runoff beyond the designated release area;
 - (d) there is no aerosols or odours;
 - (e) deep drainage below the root zone of any vegetation is minimised;
 - (f) the quality of shallow aquifers is not adversely affected.

Pipeline Wastewater

- C7*** Contaminants that are hydrostatic test water from pipelines and contaminants from low point drains, may be released to land in accordance with condition (C6).
- C8*** **Produced water** may be re-used in:
- (a) drilling and well hole activities; or
 - (b) stimulation activities.

- C9*** Produced water may be released to land for the following purposes:
- (a) dust suppression;
 - (b) construction and operational purposes for the petroleum activity authorised by this environmental authority; and
 - (c) irrigation.
- C10*** Produced water irrigated to land must:
- (a) not exceed the release limits specified in Schedule C, Table 1a Irrigation water quality monitoring; and
 - (b) be monitored at the frequency and for the quality characteristics at the monitoring point specified in *Schedule C, Table 1a - Irrigation water quality monitoring*; or
 - (c) the process under (C11) has been completed.
- C11*** Produced water for irrigation which does not meet criteria in condition (C10) (a) and (b) may be used for irrigation provided a report has been completed which:
- (a) determines soil structure, stability and productive capacity will be maintained or improved;
 - (b) determines there are no toxic effects to crops;
 - (c) determines yields and produce quality are maintained or improved;
 - (d) states water quality criteria, which has been determined in accordance with the assessment procedures outlined in Schedule C, Table 1b Assessment procedures for water quality criteria; and
 - (e) includes a water monitoring program to ensure that condition (C11) (a)(b) and (c) are being achieved.

Schedule C, Table 1a - Irrigation water quality monitoring

Quality Characteristic	Release Limit	Limit Type	Frequency	Monitoring Point	
Electrical conductivity (EC)	<950 μs/cm³	95 th percentile over a one-year period	Fortnightly	At a location following final treatment and prior to release.	
Sodium adsorption ratio (SAR) for heavy soils	≤6				
SAR for light soils	≤12				
pH	6.0 - 8.5				
Aluminium	20 mg/L	Maximum	Bi-annually		
Arsenic	2.0 mg/L				
Boron	Refer to table 9.2.18 of ANZECC	Refer to table 9.2.18 of ANZECC			
Cadmium	0.05 mg/L	Maximum			
Chromium	1 mg/L				
Cobalt	0.1 mg/L				
Copper	5 mg/L				
Fluoride	2 mg/L				
Iron	10 mg/L				
Lithium	2.5 mg/L				
Lead	5 mg/L				
Manganese	10 mg/L				
Mercury	0.002 mg/L				
Molybdenum	0.05 mg/L				
Nickel	2 mg/L				
Zinc	5 mg/L				

Schedule C, Table 1b Assessment procedures for water quality criteria

Water Quality Criteria	• Assessment Procedure
electrical conductivity sodium adsorption ratio pH	Salinity Management Handbook, with reference to Chapter 11; and/or Australian and New Zealand Guidelines for Fresh and Marine Water Quality, with reference to Volume 1 Chapter 4 and Volume 3 Chapter 9. The assessment should consider: • soil properties within the root zone to be irrigated (e.g. clay content, cation exchange capacity, exchangeable sodium percentage) • water quality of the proposed resource (e.g. salinity, sodicity) • climate conditions (e.g. rainfall) • leaching fractions • average root zone salinity (calculated) • crop salt tolerance (e.g. impact threshold and yield decline) • management practices and objectives (e.g. irrigation application rate, amelioration techniques) • broader landscape issues (e.g. land use, depth to groundwater) • any additional modelling and tests undertaken to support the varied water quality parameters.
heavy metals	Australian and New Zealand Guidelines for Fresh and Marine Water Quality, with reference to Volume 1 Chapters 3 and 4 and Volume 3 Chapter 9. The assessment should aim to derive site specific trigger values (e.g. cumulative contaminant loading limit) based on the methodology provided in the above mentioned procedure.

- C12*** Produced water may be used for domestic or stock purposes provided the water quality complies with the criteria specified in the Australian and New Zealand Guidelines for Fresh and Marine Water Quality (ANZECC and ARMCANZ 2000).
- C13*** Produced water may be transferred to a third party to be used for the following purposes, subject to condition (C14):
- (a) dust suppression;
 - (b) construction and operational purposes; or
 - (c) domestic or stock purposes provided the water quality complies with criteria specified in the Australian and New Zealand Guidelines for Fresh and Marine Water Quality (ANZECC and ARMCANZ 2000).
- C14*** If the responsibility of produced water is given or transferred to a third party in accordance with condition (C13), the holder of the environmental authority must ensure:
- (a) the responsibility of the produced water is given or transferred in accordance with a written agreement (third party agreement);
 - (b) the third party is made aware of the General Environmental Duty under section 319 of the Environmental Protection Act 1994.

Sewage Treatment Works

- C15*** **Greywater** or treated sewage effluent from a treatment system with a daily peak design capacity of up to 450 EP may be:
- (a) released to land by sub-surface or spray irrigation provided it is to a fenced and signed contaminant release area that is:
 - (i) a minimum distance of 50 metres from any watercourse, wetland or protected area; and
 - (ii) a minimum distance of 100 metres from any potable water supply or stock drinking water supply; and
 - (iii) kept vegetated with groundcover that is not a **prohibited or restricted pest species**; or
 - (b) used for dust suppression, construction or operational purposes subject to condition (C22).
- C16*** When circumstances prevent the irrigation of treated sewage effluent to land, the contaminants must be directed to on-site storage or lawfully disposed of off-site.

Sewage treatment works between 100 EP and 450 EP

- C17*** Prior to construction of a sewage treatment works with a **daily peak design capacity** of greater than 100EP, the minimum area of land and location to be utilised for irrigation of treated sewage effluent, excluding any necessary buffer zones, must be nominated.
- C18*** All nominated locations and minimum areas of land in condition (C17) for sewage treatment works with a daily peak design capacity of greater than 100EP, must be determined using the Model for Effluent Disposal using Land Irrigation (MEDLI) program or recognised equivalent and use model inputs representative of the activity and release location including but not limited to effluent quality, soil and vegetation types, and climatic conditions.
- C19*** Treated sewage effluent must only be released to the nominated locations and minimum areas of land determined by the MEDLI program or recognised equivalent identified in condition (C18).
- C20*** Treated sewage effluent released to land must comply, at the monitoring point(s), with each of the release limits specified in *Schedule C, Table 2 Treated sewage effluent standards for release to land from sewage treatment works with a daily peak design capacity of greater than 100EP* for each quality characteristic.
- C21*** Treated sewage effluent released to land must be monitored at the frequency and for the quality characteristics specified in *Schedule C, Table 2 Treated sewage effluent standards for release to land from sewage treatment works with a daily peak design capacity of greater than 100EP* for each quality characteristic.

Schedule C, Table 2 Treated sewage effluent standards for release to land from sewage treatment works with a daily peak design capacity of greater than 100EP

treatment works with a daily peak design capacity of greater than 100E				
Quality Characteristic	Release Limit	Limit Type	Frequency	Monitoring Point
5-day Biochemical oxygen demand (BOD)	20 mg/L	Maximum	Quarterly	Release pipe from sewage treatment works
E. coli	1000 cfu per 100 mL	80th percentile based on at least 5 samples with not less than 30 minutes between samples		
	10,000 cfu per 100 mL	Maximum		
pH	6.0 - 8.5	Range	Monthly	
Dissolved Oxygen	2 mg/L	Minimum		
Electrical Conductivity		Monitor only		

Treated sewage effluent use for the purposes of dust suppression, construction and operational purposes

- C22*** Treated sewage effluent may only be used for dust suppression, construction and operational purposes provided that:
- (a) the treated sewage effluent has not been stored in a dam or tank prior to use;
 - (b) on local government controlled roads, written approval from the relevant Local Government has been given to the holder of this environmental authority; and
 - (c) the treated sewage effluent quality:
 - (i) is monitored at the location and frequency specified in *Schedule C, Table 3 Treated Sewage Effluent Standards for Dust Suppression, Construction and Operational Purposes*; and
 - (ii) meets the release limits for each quality characteristic specified in *Schedule C, Table 3 Treated Sewage Effluent Standards for Dust Suppression, Construction and Operational Purposes*.

Schedule C, Table 3 – Treated Sewage Effluent Standards for Dust Suppression, Construction and Operational Purposes

Quality Characteristic	Sampling and <i>In situ</i> Measurement Point Location	Limit type	Release Limit	Frequency
pH	Treated sewage effluent storage	Range	6.0 to 8.5	Weekly until 12 months of monitoring demonstrates no exceedances of the release limits. Monthly monitoring can occur thereafter.
5-day Biochemical Oxygen Demand (BOD)		Median	20 mg/L	
Electrical Conductivity		Maximum	1600 uS/cm	
Turbidity		95%ile (max)	2 (5) NTU	
Total Suspended Solids		Median	5 mg/L	
E. coli		Median	<10 cfu per 100 mL	Weekly

Schedule D – Biodiversity Values

Confirming Biodiversity Values

- D1*** Prior to undertaking activities that result in significant disturbance to land in areas of native vegetation, confirmation of on-the-ground environmentally sensitive areas and wetlands at that location must be undertaken by a suitably qualified person.
- D2*** A suitably qualified person must develop and certify a methodology so that condition (D1) can be complied with and which is appropriate to confirm on-the-ground environmentally sensitive areas and wetlands.
- D3*** Where areas mapped as environmentally sensitive areas and wetlands differ from those confirmed under conditions (D1) and (D2), petroleum activities may proceed in accordance with the conditions of the environmental authority based on the confirmed on-the-ground values.
- D4*** All documentation survey information photographs, field data or any material associated with the field validation requirements in (D1) must be maintained for the life of the environmental authority to demonstrate to the administering authority that surveys were conducted in a manner consistent with requirements contained in (D2).
- D5*** The location of the petroleum activity must be selected in accordance with the following site planning principles:
- (a) maximise the use of **areas of pre-existing disturbance**
 - (b) in order of preference, avoid, minimise or mitigate any impacts, including cumulative impacts, on areas of native vegetation or other areas of ecological value
 - (c) minimise disturbance to land that may result in **land degradation**
 - (d) in order of preference, avoid then minimise isolation, fragmentation, edge effects or dissection of tracts of native vegetation; and
 - (e) in order of preference, avoid then minimise clearing of native mature trees.

Disturbance to Land Environmentally Sensitive Areas

- D6*** Petroleum activities must be carried out in accordance with *Schedule D, Table 1 Petroleum Activities in Environmentally Sensitive Areas*, and any other relevant conditions of this environmental authority.

Schedule D, Table 1 Petroleum Activities in Environmentally Sensitive Areas

ESA Category	Within the ESA	Primary protection zone of the ESA	Secondary protection zone of the ESA
Category A ESAs	No petroleum activities permitted	Only low impact petroleum activities permitted.	Limited petroleum activities permitted subject to condition (D10) Limited impact camps permitted subject to condition (D10) Limited impact petroleum activities permitted subject to condition (D10)
Category B ESAs excluding 'Endangered' Regional Ecosystems	Only low impact petroleum activities permitted	Limited petroleum activities permitted subject to condition (D10)	

ESA Category	Within the ESA	Primary protection zone of the ESA	Secondary protection zone of the ESA
		Limited impact camps permitted subject to condition (D10) Limited impact petroleum activities permitted subject to condition (D10)	
Category C ESAs that are Nature Refuges, Koala Habitat and/or Declared Catchment Areas	Only low impact petroleum activities permitted	Limited petroleum activities permitted subject to condition (D10) Limited impact camps permitted subject to conditions (D7) and (D10) Limited impact petroleum activities permitted subject to condition (D10)	
Category B ESAs that are 'Endangered' Regional Ecosystems	Only limited petroleum activities permitted subject to condition (D11)	Limited petroleum activities permitted subject to condition (D10) Limited impact camps permitted subject to condition (D10) Limited impact petroleum activities permitted subject to condition (D10)	
Category C ESAs that are Essential Habitat, Essential Regrowth Habitat and/or 'Of Concern' Regional Ecosystems	Only limited petroleum activities permitted subject to condition (D11)	Limited petroleum activities permitted subject to condition (D10) Limited impact camps permitted subject to conditions (D7) and (D10) Limited impact petroleum activities permitted subject to condition (D10)	
Category C ESAs that are Regional Parks (Resource Use Area)	Only limited petroleum activities permitted subject to condition (D11)	Limited petroleum activities permitted subject to condition (D10) Limited impact camps permitted subject to condition (D10) Limited impact petroleum activities permitted subject to condition (D10)	

ESA Category	Within the ESA	Primary protection zone of the ESA	Secondary protection zone of the ESA
Category C ESAs that are State Forests and/or Timber Reserves	Limited petroleum activities permitted subject to condition (D11) Petroleum activities that are extraction activities and screening activities permitted. Limited impact camps permitted. Limited impact petroleum activities permitted subject to conditions (D8) and (D11)		

Note: Approvals may be required under the Forestry Act 1959 where the petroleum activity is proposed to be carried out in ESAs that are State Forests or Timber Reserves.

- D7*** Limited impact camps must not be located within a primary protection zone of Category C ESA (Essential Habitat) or Category C ESA (Nature Refuges).
- D8*** Limited impact petroleum activities must not be located within areas that contain commercial species.
- D9*** Despite condition (D6) decommissioning petroleum activities are authorised within all ESAs other than Category A ESAs, and within all ESA protection zones when conducted in accordance with the land disturbance planning principles provided in condition (D5).
- D10*** Limited petroleum activities, limited impact camps or limited impact petroleum activities located within a primary protection zone or secondary protection zone of an environmentally sensitive area in accordance with *Schedule D, Table 1 Petroleum Activities in Environmentally Sensitive Areas* must not negatively affect the adjacent environmentally sensitive area.
- D11*** Prior to carrying out limited petroleum activities or limited impact petroleum activities undertaken within environmentally sensitive areas in accordance with *Schedule D, Table 1 Petroleum Activities in Environmentally Sensitive Areas*, it must be demonstrated, in the following order of preference that:
- (a) no reasonable or practicable alternative exists for carrying out the limited petroleum activities within the environmentally sensitive area;
 - (b) the limited petroleum activities are preferentially located in pre-existing areas of clearing or significant disturbance;
 - (c) clearance widths for linear infrastructure is minimised to the maximum extent possible, taking into account the following matters:
 - i. safe vehicle movement;
 - ii. drainage devices installed are of a type that is appropriate for the track type and location;
 - iii. erosion and sediment control measures installed are in accordance condition (B2); and
 - iv. power line stays have been preferentially located within the pipeline right of way where possible.
 - (d) the maximum clearance widths specified in *Schedule D, Table 2 Authorised Disturbance for Linear Infrastructure* are not exceeded.

Schedule D, Table 2 Authorised Disturbance for Linear Infrastructure

Type of Linear Infrastructure	Clearance width (m)
(A) Access track(s) not associated with a pipeline(s), communication lines(s) or power line(s):	
(a) single carriage access tracks	18
(b) dual carriage access tracks	21
(c) single or dual carriage access track and associated turnaround bay	35
(B) Access track(s) associated with a pipeline(s), communication line(s) or power line(s):	
(a) single carriage access tracks with a single pipeline, communication line or power line	24
(b) dual carriage access track with a single pipeline, communication line or power line.	27
(c) single or dual carriage access track and associated turnaround bay with a single pipeline, communication line or power line.	41
(d) additional clearing for any additional parallel pipeline, communication line or power line associated with (B)(a), (b) or (c)	7 ¹
(C) Additional clearing for take-off drains, power line stays or turnaround bays or other work areas:	
(a) Additional clearing for power line stays associated with (B)	10
(b) additional clearing for take-off drains associated with (A) or (B)	10

¹ Maximum total disturbance for (B) is 62m.

Offset Delivery

- D12*** An Offset Plan must be prepared in accordance with section 5 of the Offset Strategy at Appendix AB of the final environmental impact statement (EIS) decided by the Coordinator-General on 3 September 2015. After a decision under the *Environment Protection and Biodiversity Conservation Act 1999* (EPBC Act) and three (3) months prior to any construction activities, the proponent must submit the Offset Plan to the Department of Environment and Science. The Offset Plan must consider offsets for any significant residual impacts to the following ecological receptors:
- (i) regional ecosystems listed as endangered (biodiversity status)
 - (ii) regional ecosystems listed as of concern (biodiversity status)
 - (iii) essential habitat
 - (iv) wetlands of general ecological significance.

The Offset Plan must:

- (a) detail how the specific offset requirements conditioned by the Commonwealth Minister for the Environment in any approval for the project under the EPBC Act will be delivered
- (b) detail proposed offsets to address any significant residual impacts for the ecological receptors at condition (D12) (i)-(iv)
- (c) include, but not necessarily be limited to:
 - (i) a detailed description of the land to which the plan relates, the values affected and the extent and likely timing of impact on each value
 - (ii) evidence that values impacted can be offset
 - (iii) the method for delivering the offset, including consideration of land-based offsets, direct benefit management plans, offset transfers and/or offset payments and other tenure activities
- (d) ensure a legally binding mechanism to protect and manage offset areas
- (e) include a staging plan to demonstrate how offsets will be delivered and managed over the life of the project

- (f) consider existing, proposed and future offsets prepared and/or planned under the existing environmental authorities pertaining to the project area.

Maximum Disturbance

D13* Disturbance to ecological receptors listed in *Schedule D, Table 3 Maximum disturbance limits to ecological receptors*, must not exceed the relevant maximum disturbance limits.

Schedule D, Table 3 Maximum disturbance limits to ecological receptors

Ecological Receptor	Proposed disturbance area for ATP745 (ha)
Endangered vegetation (REs and high value regrowth) (biodiversity status)	5.6
Of-concern vegetation (REs and high value regrowth) (biodiversity status)	68.9
Essential habitat	1.9
Wetlands (general ecological significance)	1
Resource reserves	0
State forest and timber reserves	0

Schedule E – Waste

General Waste Management

- E1*** Measures must be implemented so that waste is managed in accordance with the **waste and resource management hierarchy** and the **waste and resource management principles**.
- E2*** Waste, including **waste fluids**, but excluding waste used in **closed-loop systems**, must be transported off-site for lawful re-use, remediation, recycling or disposal, unless the waste is specifically authorised by conditions (E3), (E5), (E6), (C7), (C9) and (C15) to be disposed of or used on site.
- E3*** Unless otherwise authorised by the conditions of this EA to be released to land, Waste fluids, other than **flare precipitant** stored in **flare pits**, or residual drilling material, or drilling fluids stored in **sumps**, must be contained in either:
(a) an above ground container; or
(b) a structure which contains the wetting front.
- E4*** Vegetation waste may be burned if it relates to a state forest, timber reserve or forest entitlement area administered by the *Forestry Act 1959* and a permit has been obtained under the *Fire and Rescue Service Act 1990*.

Residual Drilling Materials

- E5*** If sumps are used to store residual drilling material or drilling fluids, they must only be used for the duration of drilling activities.
- E6*** Residual drilling material can only be disposed of on-site:
(a) by **mix-bury-cover method** if the residual drilling material meets the **approved quality criteria**; or
(b) if it is certified by a **suitably qualified third party** as being of acceptable quality for disposal to land by the proposed method and that environmental harm will not result from the proposed disposal.
- E7*** Records must be kept to demonstrate compliance with condition (E5) and condition (E6).

Schedule F – Noise

- F1*** Notwithstanding condition (A16), emission of noise from the petroleum activity at levels less than those specified in *Schedule F, Table 1 Noise nuisance limits* are not considered to be environmental nuisance.

Schedule F, Table 1 Noise nuisance limits

Time period	Metric	<u>Short term noise event</u>	<u>Medium term noise event</u>	<u>Long term noise event</u>
7:00am 6:00pm	L _{Aeq,adj,15 min}	45 dBA	43 dBA	40 dBA
6:00pm 10:00pm	L _{Aeq,adj,15 min}	40 dBA	38 dBA	35 dBA
10:00pm 6:00am	L _{Aeq,adj,15 min}	28 dBA	28 dBA	28 dBA
	Max L_{pA,15 min}	55 dBA	55 dBA	55 dBA
6:00am 7:00am	L _{Aeq,adj,15 min}	40 dBA	38 dBA	35 dBA

Note: The noise limits in Table 1 have been set based on the following deemed **background noise levels** (L_{ABG}):

7:00am - 6:00 pm: 35 dBA
 6:00pm - 10:00 pm: 30 dBA
 10:00pm - 6:00 am: 25 dBA
 6:00am - 7:00 am: 30 dBA

- F2*** If the noise subject to a **valid complaint** is tonal or **impulsive**, the adjustments detailed in *Schedule F, Table 2 Adjustments to be added to noise levels at sensitive receptors* are to be added to the measured noise level(s) to derive L_{Aeq, adj, 15 min}.

Schedule F, Table 2 Adjustments to be added to noise levels at sensitive receptors

Noise characteristic	Adjustment to noise
Tonal characteristic is just audible	+ 2 dBA
Tonal characteristic is clearly audible	+ 5 dBA
Impulsive characteristic is detectable	+ 2 to + 5 dBA

- F3*** Notwithstanding condition (F1), emission of any low frequency noise must not exceed either (F3(a)) and (F3(b)), or (F3(c)) and (F3(d)) in the event of a valid complaint about low frequency noise being made to the administering authority:
- (a) 60 dB(C) measured outside the sensitive receptor; and
 - (b) the difference between the external A-weighted and C-weighted noise levels is no greater than 20 dB; or
 - (c) 50 dB(Z) measured inside the sensitive receptor; and
 - (d) the difference between the internal A-weighted and Z-weighted (**Max L_{pZ, 15 min}**) noise levels is no greater than 15 dB.
- F4*** A Blast Management Plan must be developed for each blasting activity in accordance with **Australian Standard 2187**.
- F5*** Blasting operations must be designed to not exceed an airblast overpressure level of 120 dB (linear peak) at any time, when measured at or extrapolated to any sensitive place.

F6* Blasting operations must be designed to not exceed a ground-borne vibration peak particle velocity of 10mm/s at any time, when measured at or extrapolated to any sensitive place.

Schedule G – Air

Venting and Flaring

- G1*** Unless venting is authorised under the *Petroleum and Gas (Production and Safety) Act 2004* or the *Petroleum Act 1923*, waste gas must be flared in a manner that complies with all of (G1(a)) and (G1(b)) and (G1(c)), or with (G1(d)):
- (a) an automatic ignition system is used, and
 - (b) a flame is visible at all times while the waste gas is being flared, and
 - (c) there are no visible smoke emissions other than for a total period of no more than 5 minutes in any 2 hours, or
 - (d) it uses an **enclosed flare**.

Schedule H – Regulated Structures

Assessment of Consequence Category

- H1** The **consequence category** of any **structure** must be **assessed** by a **suitably qualified and experienced person** in accordance with the *Manual for assessing consequence categories and hydraulic performance of structures* (ESR/2016/1933¹) at the following times:
- a) prior to the design and **construction** of the **structure**, or
 - b) prior to any change in its purpose or the nature of its stored contents.
- H2** A **consequence assessment** report and **certification** must be prepared for each structure assessed and the report may include a consequence assessment for more than one structure.
- H3** Certification must be provided by the **suitably qualified and experienced person** who undertook the assessment, in the form set out in the *Manual for assessing consequence categories and hydraulic performance of structures* (ESR/2016/1933).

Design and Construction of a Regulated Structure

- H4** All **regulated structures** must be designed by, and **constructed**² under the supervision of, a suitably qualified and experienced person in accordance with the requirements of the *Manual for assessing consequence categories and hydraulic performance of structures* (ESR/2016/1933).
- H5** Construction of a regulated structure is prohibited unless:
- a) the **holder** has submitted a **consequence category assessment** report and certification to the administering authority; and
 - b) certification for the design, **design plan** and the associated operating procedures has been **certified** by a suitably qualified and experienced person in compliance with the relevant condition of this **authority**.
- H6** Certification must be provided by the suitably qualified and experienced person who oversees the preparation of the design plan in the form set out in the *Manual for assessing consequence categories and hydraulic performance of structures* (ESR/2016/1933), and must be recorded in the **Register of Regulated Structures**.
- H7** **Regulated structures** must:
- a) be designed and constructed in compliance with the *Manual for assessing consequence categories and hydraulic performance of structures* (ESR/2016/1933);
 - b) be designed and constructed with due consideration given to ensuring that the design integrity would not be compromised on account of:
 - i. floodwaters from entering the regulated dam from any **watercourse** or drainage line; and
 - ii. wall failure due to erosion by floodwaters arising from any watercourse or drainage line.
 - c) have the floor and sides of the **dam** designed and constructed to prevent or minimise the passage of the wetting front and any entrained contaminants through either the floor or sides of the dam during the operational life of the dam and for any period of decommissioning and **rehabilitation** of the dam.

¹ This is the publication number, which can be used as a search term to find the latest version of the publication at www.des.qld.gov.au.

² Certification of design and construction may be undertaken by different persons.

- H8** Certification by the suitably qualified and experienced person who supervises the construction must be submitted to the administering authority on the completion of construction of the regulated structure, and state that:
- a) the 'as constructed' drawings and specifications meet the original intent of the design plan for that regulated structure
 - b) construction of the regulated structure is in accordance with the design plan.

Notification of Affected Persons

- H9** All **affected persons** must be provided with a copy of the **emergency action plan** in place for each regulated structure
- a) prior to the operation of the new regulated structure; and
 - b) if the emergency action plan is amended, within 5 business days of it being amended.

Operation of a Regulated Structure

- H10** Operation of a regulated structure is prohibited unless the holder has submitted to the administering authority in respect of regulated structure, all of the following:
- a) one paper copy and one electronic copy of the design plan and certification of the 'design plan' in accordance with condition H5;
 - b) a set of 'as constructed' drawings and specifications;
 - c) certification of the 'as constructed drawings and specifications' in accordance with condition H8;
 - d) where the regulated structure is to be managed as part of an integrated containment system for the purpose of sharing the DSA volume across the system, a copy of the certified **system design plan**;
 - e) the requirements of this authority relating to the **construction** of the regulated structure have been met;
 - f) the holder has entered the details required under this **authority**, into a Register of Regulated Structures; and
 - g) there is a current **operational plan** for the regulated structure.
- H11** Each regulated structure must be maintained and operated, for the duration of its operational life until decommissioned and rehabilitated, in compliance with the current operational plan and, if applicable, the current design plan and associated certified 'as constructed' drawings.

Mandatory Reporting Level

- H12** Conditions H13 to H16 inclusive only apply to Regulated Structures which have not been certified as low consequence category for 'failure to contain – overtopping'.
- H13** The **Mandatory Reporting Level** (the **MRL**) must be marked on a regulated dam in such a way that during routine inspections of that dam, it is clearly observable.
- H14** The holder must, as soon as practicable but within forty-eight (48) hours of becoming aware, notify the administering authority when the level of the contents of a regulated dam reaches the MRL.
- H15** The holder must, immediately on becoming aware that the MRL has been reached, act to prevent the occurrence of any unauthorised discharge from the regulated dam.
- H16** The holder must record any changes to the MRL in the Register of Regulated Structures.

Design Storage Allowance

- H17** The holder must assess the performance of each regulated dam or linked containment system over the preceding November to May period based on actual observations of the available storage in each regulated dam or linked containment system taken prior to 1 July of each year.
- H18** By 1 November of each year, storage capacity must be available in each regulated dam (or network of linked containment systems with a shared DSA volume), to meet the **Design Storage Allowance (DSA)** volume for the dam (or network of linked containment systems).
- H19** The holder must, as soon as practicable but within forty-eight (48) hours of becoming aware that the regulated dam (or network of linked containment systems) will not have the available storage to meet the DSA volume on 1 November of any year, notify the administering authority.
- H20** The holder must, immediately on becoming aware that a regulated dam (or network of linked containment systems) will not have the available storage to meet the DSA volume on 1 November of any year, act to prevent the occurrence of any unauthorised discharge from the regulated dam or linked containment systems.

Annual Inspection Report

- H21** Each regulated structure must be inspected each calendar year by a suitably qualified and experienced person.
- H22** At each annual inspection, the condition and adequacy of all components of the regulated structure must be assessed and a suitably qualified and experienced person must prepare an annual inspection report containing details of the assessment and include a recommendations section, with any recommended actions to ensure the integrity of the regulated structure or a positive statement that no recommendations are required.
- H23** The suitably qualified and experienced person who prepared the annual inspection report must certify the report in accordance with the *Manual for assessing consequence categories and hydraulic performance of structures* (ESR/2016/1933).
- H24** The holder must within 20 business days of receipt of the annual inspection report, provide to the administering authority:
- a) The recommendations section of the annual inspection report; and
 - b) If applicable, any actions being taken in response to those recommendations; and
 - c) If, following receipt of the recommendations and (if applicable) recommended actions, the administering authority requests a copy of the annual inspection report from the holder, provide this to the administering authority within 10 business days¹¹ of receipt of the request.

Transfer Arrangements

- H25** The holder must provide a copy of any reports, documentation and certifications prepared under this authority, including but not limited to any Register of Regulated Structures, consequence assessment, design plan and other supporting documentation, to a new holder on transfer of this authority.

Decommissioning and Rehabilitation

- H26** Regulated structures must not be abandoned but be either:
- a) decommissioned and rehabilitated to achieve compliance with condition H27; or
 - b) be left in-situ for a use by the landholder provided that:
 - i. it no longer contains contaminants that will migrate into the environment; and

- ii. it contains water of a quality that is demonstrated to be suitable for its intended use(s); and
- c) the holder of the environmental authority and the landholder agree in writing that the;
 - i. dam will be used by the landholder following the cessation of the environmentally relevant activity(ies); and
 - ii. landholder is responsible for the dam, on and from an agreed date.

H27 Before surrendering this environmental authority the site must be rehabilitated to achieve a safe, **stable**, non-polluting landform and be suitable for the relevant final land use.

Register of Regulated Structures

H28 A Register of Regulated Structures must be established and maintained by the holder for each regulated structure.

H29 The holder must provisionally enter the required information in the Register of Regulated Structures when a design plan for a regulated dam is submitted to the administering authority.

H30 The holder must make a final entry of the required information in the Register of Regulated Structures once compliance with condition H10 has been achieved.

H31 The holder must ensure that the information contained in the Register of Regulated Structures is current and complete on any given day.

H32 All entries in the Register of Regulated Structures must be approved by the chief executive officer for the holder of this authority, or their delegate, as being accurate and correct.

H33 The holder must, at the same time as providing the annual return, supply to the administering authority a copy of the records contained in the Register of Regulated Structures, in the electronic format required by the administering authority.

Schedule I – Well construction, maintenance and stimulation activities

Drilling Activities

- I1* Oil based or **synthetic based drilling muds** must not be used in the carrying out of the petroleum activity(ies).
- I2* Drilling activities must not result in the connection of the target gas producing formation and another aquifer.
- I3* Practices and procedures must be in place to detect, as soon as practicable, any fractures that have or may result in the connection of a target gas producing formation and another aquifer as a result of drilling activities.

Stimulation Activities

- I4* Polycyclic aromatic hydrocarbons or products that contain polycyclic aromatic hydrocarbons must not be used in **stimulation fluids** in concentrations above the **reporting limit**.
- I5* Stimulation activities must not negatively affect water quality, other than that within the **stimulation impact zone** of the target gas producing formation.
- I6* Stimulation activities must not cause the connection of the target gas producing formation and another aquifer.
- I7* The internal and external mechanical integrity of the well system prior to and during well stimulation must be ensured such that there is:
 - a) no significant leakage in the casing, tubing, or packer; and
 - b) there is no significant fluid movement into another aquifer through vertical channels adjacent to the well bore hole.
- I8* Practices and procedures must be in place to detect, as soon as practicable, any fractures that cause the connection of a target gas producing formation and another aquifer.

Stimulation Risk Assessment

- I9* Prior to undertaking well stimulation activities, a risk assessment must be developed to ensure that stimulation activities are managed to prevent environmental harm.
- I10* The stimulation risk assessment must be carried out for every well to be stimulated prior to stimulation activities being carried out at that well and address issues at a relevant geospatial scale such that changes to features and attributes are adequately described and must include, but not necessarily be limited to:
 - a) a process description of the stimulation activity to be applied, including equipment and a comparison to best international practice;
 - b) provide details of where, when and how often stimulation is to be undertaken on the tenures covered by this environmental authority;
 - c) a geological model of the field to be stimulated including geological names, descriptions and depths of the target gas producing formation(s);
 - d) naturally occurring geological faults;
 - e) seismic history of the region (e.g. earth tremors, earthquakes);
 - f) proximity of overlying and underlying aquifers;
 - g) description of the depths that aquifers with environmental values occur, both above and below the target gas producing formation.
 - h) identification and proximity of **landholders' active groundwater bores** in the area where stimulation activities are to be carried out;

- i) the environmental values of groundwater in the area;
- j) an assessment of the appropriate limits of reporting for all water quality indicators relevant to stimulation monitoring in order to accurately assess the risks to environmental values of groundwater;
- k) description of overlying and underlying formations in respect of porosity, permeability, hydraulic conductivity, faulting and fracture propensity;
- l) consideration of barriers or known direct connections between the target gas producing formation and the overlying and underlying aquifers;
- m) a description of the well mechanical integrity testing program;
- n) process control and assessment techniques to be applied for determining extent of stimulation activities (e.g. microseismic measurements, modelling etc);
- o) practices and procedures to ensure that the stimulation activities are designed to be contained within the target gas producing formation;
- p) groundwater **transmissivity**, flow rate, hydraulic conductivity and direction(s) of flow;
- q) a description of the chemicals used in stimulation activities (including estimated total mass, estimated composition, chemical abstract service numbers and properties), their mixtures and the resultant compounds that are formed after stimulation;
- r) a mass balance estimating the concentrations and absolute masses of chemicals that will be reacted, returned to the surface or left in the target gas producing formation subsequent to stimulation;
- s) an environmental hazard assessment of the chemicals used including their mixtures and the resultant chemicals that are formed after stimulation including:
 - (i). toxicological and ecotoxicological information of chemicals used;
 - (ii). information on the persistence and bioaccumulation potential of the chemicals used;
 - (iii). identification of the stimulation fluid chemicals of potential concern derived from the risk assessment;
- t) an environmental hazard assessment of use, formation of, and detection of polycyclic aromatic hydrocarbons in stimulation activities;
- u) if used, identification and an environmental hazard assessment of using radioactive tracer beads in stimulation activities
- v) an environmental hazard assessment of leaving stimulation chemicals in the target gas producing formation for extended periods subsequent to stimulation;
- w) human health exposure pathways to operators and the regional population;
- x) risk characterisation of environmental impacts based on the environmental hazard assessment;
- y) potential impacts to landholder bores as a result of stimulation activities;
- z) the determination of the likelihood of causing interconnectivity and/or negative water quality as a result of stimulation activities undertaken in close proximity or each other; and
- aa) potential environmental or health impacts which may result from stimulation activities including but not limited to water quality, air quality (including suppression of dust and other airborne contaminants), noise and vibration.

Water Quality Baseline Monitoring

- I11*** Prior to undertaking any stimulation activity, a baseline bore assessment must be undertaken of the water quality of:
- (a) all landholders' active groundwater bores (subject to access being permitted by the landholder) that are spatially within a two (2) kilometre horizontal radius from the location of the stimulation initiation point within the target gas producing formation; and
 - (b) all landholders' active groundwater bores (subject to access being permitted by the landholder) in any aquifer that is within 200 metres above or below the target gas producing formation and is spatially located with a two (2) kilometre radius from the location of the stimulation initiation point; and
 - (c) any other bore that could potentially be adversely impacted by the stimulation activity(ies) in accordance with the findings of the risk assessment required by conditions (I9) and (I10).

- I12*** Prior to undertaking stimulation activities at a well, there must have sufficient water quality data to accurately represent the water quality in the well to be stimulated. The data must include, as a minimum, the results of analyses for the parameters in condition (I13).
- I13*** Baseline bore and well assessments must include relevant **analytes** and physicochemical parameters to be monitored in order to establish baseline water quality and must include, but not necessarily be limited to:
- (a) pH
 - (b) electrical conductivity [$\mu\text{S/m}$]
 - (c) turbidity [NTU]
 - (d) total dissolved solids [mg/L]
 - (e) temperature [$^{\circ}\text{C}$]
 - (f) dissolved oxygen [mg/L]
 - (g) dissolved gases (methane, chlorine, carbon dioxide, hydrogen sulfide) [mg/L]
 - (h) alkalinity (bicarbonate, carbonate, hydroxide and total as CaCO_3) [mg/L]
 - (i) sodium adsorption ratio (SAR)
 - (j) anions (bicarbonate, carbonate, hydroxide, chloride, sulphate) [mg/L]
 - (k) cations (aluminium, calcium, magnesium, potassium, sodium) [mg/L]
 - (l) dissolved and total metals and metalloids (including but not necessarily being limited to: aluminium, arsenic, barium, borate (boron), cadmium, total chromium, copper, iron, fluoride, lead, manganese, mercury, nickel, selenium, silver, strontium, tin and zinc) [$\mu\text{g/L}$]
 - (m) total petroleum hydrocarbons [$\mu\text{g/L}$]
 - (n) **BTEX** (as benzene, toluene, ethylbenzene, ortho-xylene, para- and meta-xylene, and total xylene) [$\mu\text{g/L}$]
 - (o) polycyclic aromatic hydrocarbons (including but not necessarily being limited to: naphthalene, phenanthrene, benzo[a]pyrene) [$\mu\text{g/L}$]
 - (p) sodium hypochlorite [mg/L]
 - (q) sodium hydroxide [mg/L]
 - (r) formaldehyde [mg/L]
 - (s) ethanol [mg/L]; and
 - (t) gross alpha + gross beta or radionuclides by gamma spectroscopy [Bq/L].

Stimulation Impact Monitoring Program

- I14*** A Stimulation Impact Monitoring Program must be developed prior to the carrying out of stimulation activities which must be able to detect adverse impacts to water quality from stimulation activities and must consider the findings of the risk assessment required by conditions (I9) and (I10) that relate to stimulation activities and must include, as a minimum, monitoring of:
- (a) the stimulation fluids to be used in stimulation activities at sufficient frequency and which sufficiently represents the quantity and quality of the fluids used; and
 - (b) flow back waters from stimulation activities at sufficient frequency and which sufficiently represents the quality of that flow back water; and
 - (c) flow back waters from stimulation activities at sufficient frequency and accuracy to demonstrate that 150 per cent of the volume used in stimulation activities has been extracted from the stimulated well; and
 - (d) all bores in accordance with condition (I11) at the following minimum frequency:
 - i. monthly for the first six (6) months subsequent to the stimulation activities being undertaken; then
 - ii. annually for the first five (5) years subsequent to the stimulation activities being undertaken or until analytes and physico-chemical parameters listed in condition (I13) are not detected in concentrations above baseline bore monitoring data on two (2) consecutive monitoring occasions.

- I15** The Stimulation Impact Monitoring Program must provide for monitoring of:

- a) analytes and physico-chemical parameters relevant to baseline bore and well assessments to enable data referencing and comparison including, but not necessarily being limited to the analytes and physico-chemical parameters in condition (I13); and
- b) any other analyte or physico-chemical parameters that will enable detection of adverse water quality impacts and the inter-connection with a non-target aquifer as a result of stimulation activities including chemical compounds that are actually or potentially formed by chemical reactions with each other or coal seam materials during stimulation activities.

I16* The results of the Stimulation Impact Monitoring Program must be made available to any potentially affected landholders upon request by that landholder.

Schedule J – Rehabilitation

Rehabilitation Planning

- J1*** A Rehabilitation Plan must be developed by a suitably qualified person and must include the:
- (a) rehabilitation goals; and
 - (b) procedures to be undertaken for rehabilitation that will:
 - (i). achieve the requirements of conditions (J2) to (J10) inclusive; and
 - (ii). provide for appropriate monitoring and maintenance.

Transitional Rehabilitation

- J2*** Significantly disturbed areas that are no longer required for the on-going petroleum activities, must be rehabilitated within 12 months (unless an exceptional circumstance in the area to be rehabilitated (e.g. a flood event) prevents this timeframe being met) and be maintained to meet the following acceptance criteria:
- (a) contaminated land resulting from petroleum activities is remediated and rehabilitated;
 - (b) the areas are:
 - (i). non-polluting;
 - (ii). a stable landform;
 - (iii). re-profiled to contours consistent with the surrounding landform
 - (c) surface drainage lines are re-established;
 - (d) **top soil is reinstated**; and
 - (e) either:
 - (i). groundcover, that is not prohibited or restricted pest species, is **growing**; or
 - (ii). an alternative soil stabilisation methodology that achieves effective stabilisation is implemented and maintained.

Rehabilitation reporting for Relinquishment of part of an Authority to Prospect Area under the Petroleum and Gas (Production and Safety Act 2004)

- J3*** Prior to relinquishing all or part of an authority to prospect area, a rehabilitation report must be prepared which specifically relates to the area to be relinquished and demonstrates condition J9 and J10 has been met.
- J4*** The report required under condition (J 3) must be submitted to the administering authority at least 40 business days prior to the relinquishment notice being lodged with the administering authority for the Petroleum and Gas (Production and Safety) Act 2004.

Remaining Dams

- J5*** Where there is a dam, (including a low consequence dam) that is being or intended to be used by the landholder or overlapping tenure holder, the dam must be decommissioned to no longer accept inflow from the petroleum activity(ies) and the contained water must be of a quality suitable for the intended on-going uses(s) by the landholder or overlapping tenure holder.

Pipeline Activities

- J6*** Pipeline trenches must be backfilled and topsoils reinstated within three months after pipe laying.
- J7*** Reinstatement and **revegetation** of the pipeline right of way must commence within 6 months after cessation of petroleum activities for the purpose of pipeline construction.

- J8*** Backfilled, reinstated and **revegetated** pipeline trenches and right of ways must be:
- (a) a stable landform
 - (b) re-profiled to a level consistent with surrounding soils
 - (c) re-profiled to original contours and established drainage lines; and
 - (d) vegetated with groundcover which is not a prohibited or restricted pest species , and which is established and growing.

Final Rehabilitation Acceptance Criteria

- J9*** All significantly disturbed areas caused by petroleum activities which are not **being or intended to be utilised by the landholder or overlapping tenure holder**, must be rehabilitated to meet the following final acceptance criteria measured either against the highest ecological value **adjacent land use** or the **pre-disturbed land use**:
- (a) greater than or equal to 70 per cent of native ground cover **species richness**
 - (b) greater than or equal to the total per cent ground cover
 - (c) less than or equal to the per cent species richness of prohibited or restricted pest species
 - (d) where the adjacent land use contains, or the pre-clearing land use contained, one or more regional ecosystem(s), then:
 - (i). at least one Regional Ecosystem(s) from the same broad vegetation group, as demonstrated by the **predominant species** in the **ecologically dominant layer**, must be present; and,
 - (ii). the Regional Ecosystem present in (J9)(d)(i) must possess an equivalent or higher conservation value (biodiversity status) than the Regional Ecosystem(s) in either the adjacent land or pre-disturbed land.

Final Rehabilitation Acceptance Criteria in Environmentally Sensitive Areas

- J10*** Where significant disturbance to land has occurred in an environmentally sensitive area, the following final rehabilitation criteria as measured against the pre-disturbance biodiversity values assessment (required by conditions (J1) and (J2)) must be met:
- (a) greater than or equal to 70% of native ground cover species richness
 - (b) greater than or equal to the total per cent ground cover
 - (c) less than or equal to the per cent species richness of Prohibited or restricted pest species
 - (d) greater than or equal to 50% of organic litter cover
 - (e) greater than or equal to 50% of **total density of coarse woody material**; and
 - (f) all predominant species in the ecologically dominant layer, that define the pre-disturbance regional ecosystem(s) are present.

Schedule K – Notification

- K1*** The administering authority must be notified through the Pollution Hotline as soon as reasonably practicable, but within 48 hours after becoming aware of:
- (a) any unauthorised significant disturbance to land; or
 - (b) any unauthorised release of contaminants greater than:
 - (i). 200 L of hydrocarbons; or
 - (ii). 200 L of stimulation additives; or
 - (iii). 500 L of stimulation fluids; or
 - (iv). 1,000 L of brine; or
 - (v). 5,000 L of coal seam gas water; or
 - (vi). 10,000 L of sewage effluent;
 - (vii). 100,000 L of irrigation-quality coal seam gas water, released inside a designated irrigation area authorised by condition (C9)(c).
 - (c) a potential or actual loss of structural or hydraulic integrity of a dam; or
 - (d) when the level of the contents of any regulated dam reaches the mandatory reporting level; or
 - (e) when a regulated dam will not have available storage to meet the design storage allowance on the 1 November of any year; or
 - (f) any incident where there is a potential or actual loss of **well integrity** (e.g. when the annulus pressure during stimulation increases by more than 3.5 MPa from the pressure immediately preceding stimulation); or
 - (g) any detection of **restricted stimulation fluids** from stimulation fluid monitoring; or
 - (h) any analyses result from baseline bore, well or stimulation impact monitoring that exceeds a water quality objective for the protection of an environmental value of that water resource; or
 - (i) any analyses result from groundwater monitoring that exceeds trigger action investigation levels, if provided in this environmental authority.
- K2*** The notification of emergencies or incidents as required by condition (K1) must include but not be limited to the following information:
- (a) the environmental authority number and name of the holder;
 - (b) the tenure type and number where the emergency or incident occurred;
 - (c) the name and telephone number of the designated contact person;
 - (d) the location of the emergency or incident (GDA94);
 - (e) the date and time that the emergency or incident occurred;
 - (f) the date and time the holder of this environmental authority became aware of the emergency or incident;
 - (g) details of the nature of the event and the circumstances in which it occurred;
 - (h) the estimated quantity and type of any contaminants involved in the incident;
 - (i) the actual or potential suspected cause of the emergency or incident;
 - (j) a description of the land use at the site of the emergency or incident (e.g. grazing, pasture, forest etc.) and/or the name of any relevant waters and other environmentally sensitive features;
 - (k) a description of the possible impacts from the emergency or incident;
 - (l) a description of whether stock and/or wildlife were exposed to any contaminants released and measures taken to prevent access for the duration of the emergency or incident;
 - (m) any sampling conducted or proposed, relevant to the emergency or incident;
 - (n) landholder details and details of landholder consultation;
 - (o) immediate actions taken to control the impacts of the emergency or incident and how environmental harm was mitigated at the time of the emergency or incident; and
 - (p) whether further examination/root cause analysis is required and if so, the expected date by when this examination will be completed and reported to the administering authority.
- K3*** Within 10 business days following the initial notification under conditions (K1) and (K2) unless a longer time is agreed to by the administering authority, a written report must be provided to the administering authority, including the following (where relevant to the emergency or incident):
- (a) the root cause of the emergency or incident;

- (b) the confirmed quantities and types of any contaminants involved in the incident;
- (c) results and interpretation of any analysis of samples taken at the time of the emergency or incident (including the analysis results of any impact monitoring);
- (d) a final assessment of the impacts from the emergency or incident including any actual or potential environmental harm that has occurred or may occur in the longer term as a result of the release;
- (e) the success or otherwise of actions taken at the time of the incident to prevent or minimise environmental harm;
- (f) results and current status of landholder consultation, including commitment to resolve any outstanding issues / concerns; and
- (g) actions and / or procedural changes to prevent a recurrence of the emergency or incident.

Schedule L – Definitions

“Adjacent Land Use(s)” means the **ecosystem function** adjacent to an area of significant disturbance, or where there is no ecosystem function, the use of the land. An adjacent land use does not include an adjacent area that shows evidence of edge effect.

“Administering Authority” means:

- (a) for a matter, the administration and enforcement of which has been devolved to a local government under section 514 of the *Environmental Protection Act 1994* the local government; or
- (b) for all other matters the Chief Executive of the Department of Environment and Science; or
- (c) another State Government Department, Authority, Storage Operator, Board or Trust, whose role is to administer provisions under other enacted legislation.

“Affected Person” is someone whose drinking water can potentially be impacted as a result of discharges from a dam or their life or property can be put at risk due to dwellings or workplaces being in the path of a dam break flood.

“Alternative Arrangement” means a written agreement about the way in which a particular environmental nuisance impact will be dealt with at a sensitive place, and may include an agreed period of time for which the arrangement is in place. An alternative arrangement may include, but is not limited to, a range of nuisance abatement measures to be installed at the sensitive place, or provision of alternative accommodation for the duration of the relevant nuisance impact.

“Analogue Site” means an area of land which contains values and characteristics representative of an area to be rehabilitated prior to disturbance. Such values must encompass land use, topographic, soil, vegetation, vegetation community attributes and other ecological characteristics. Analogue sites can be the pre-disturbed site of interest where significant surveying effort has been undertaken to establish benchmark parameters.

“Analytes” means a chemical parameter determined by either physical measurement in the field or by laboratory analysis.

“Annual Exceedance Probability or AEP” the probability that at least one event in excess of a particular magnitude will occur in any given year.

“Annual Inspection Report” means an assessment prepared by a suitably qualified and experienced person containing details of the assessment against the most recent consequence assessment report and design plan (or system design plan):

- (a) against recommendations contained in previous annual inspections reports;
- (b) against recognised dam safety deficiency indicators;
- (c) for changes in circumstances potentially leading to a change in consequence category;
- (d) for conformance with the conditions of this authority;
- (e) for conformance with the ‘as constructed’ drawings;
- (f) for the adequacy of the available storage in each regulated dam, based on an actual observation or observations taken after 31 May each year but prior to 1 November of that year, of accumulated sediment, state of the containment barrier and the level of liquids in the dam (or network of linked containment systems);
- (g) for evidence of conformance with the current operational plan.

“Appraisal Well” means a petroleum well to test the potential of one (1) or more natural underground reservoirs for producing or storing petroleum. For clarity, an appraisal well does not include an exploration well.

“Approved Quality Criteria” for the purposes of residual drilling materials, means the residual drilling material meet the following quality standards:

Part A In all cases:

Parameter	Maximum concentration
pH	6-10.5 (range)
Electrical Conductivity	20 dS/m (20,000 µS/cm)
Chloride*	8000 mg/L

*Chloride analysis is only required if an additive containing chloride was used in the drilling process.

The limits in Part A must be measured in the clarified filtrate of oversaturated solids prior to mixing.

Part B If any of the following metals are a component of the drilling fluids, then for that metal:

Parameter	Maximum concentration
Arsenic	20 mg/kg
Selenium	5 mg/kg
Boron	100 mg/kg
Cadmium	3 mg/kg
Chromium	400 mg/kg
Copper	100 mg/kg
Lead	600 mg/kg

The limits in Part B and Part C refer to the post soil/by-product mix. Part C If a hydrocarbon sheen is visible, the following hydrocarbon fractions:

TPH	Maximum concentration
C6 – C10	170 mg/kg
C10 – C16	150 mg/kg
C16 – C34	1300 mg/kg
C34 – C40	5600 mg/kg
Total Polycyclic Aromatic Hydrocarbons (PAHs)	20 mg/kg
Phenols (halogenated)	1 mg/kg
Phenols (non-halogenated)	60 mg/kg
Monocyclic aromatic hydrocarbons (Total sum of benzene, toluene, ethyl benzene, xylenes including ortho, para and meta xylenes) and styrene)	7 mg/kg
Benzene	1 mg/kg

“Areas of Pre-existing Disturbance” means areas where environmental values have been negatively impacted as a result of anthropogenic activity and these impacts are still evident. Areas of pre-disturbance may include areas where legal clearing, logging, timber harvesting, or grazing activities have previously occurred, where high densities of weed or pest species are present which have inhibited re-colonisation of

native regrowth, or where there is existing infrastructure (regardless of whether the infrastructure is associated with the authorised petroleum activities). The term 'areas of pre-disturbance' does not include areas that have been impacted by wildfire/s, controlled burning, flood or natural vegetation die-back.

"Assessed or Assessment" by a suitably qualified and experienced person in relation to a consequence assessment of a dam, means that a statutory declaration has been made by that person and, when taken together with any attached or appended documents referenced in that declaration, all of the following aspects are addressed and are sufficient to allow an independent audit of the assessment:

- (a) exactly what has been assessed and the precise nature of that determination;
- (b) the relevant legislative, regulatory and technical criteria on which the assessment has been based;
- (c) the relevant data and facts on which the assessment has been based, the source of that material, and the efforts made to obtain all relevant data and facts; and
- (d) the reasoning on which the assessment has been based using the relevant data and facts, and the relevant criteria.

"Associated Water" means underground water taken or interfered with, if the taking or interference happens during the course of, or results from, the carrying out of another authorised activity under a petroleum authority, such as a petroleum well, and includes waters also known as produced formation water. The term includes all contaminants suspended or dissolved within the water.

"Associated Works" in relation to a dam, means:

- (a) operations of any kind and all things constructed, erected or installed for that dam; and
- (b) any land used for those operations.

"Australian Standard 4323" means Australian Standard 4323.1:1995 Stationary source emissions method 1: Selection of sampling positions.

"Australian Standard 3580" means any of the following publications:

- AS3580.10.1 Methods for sampling and analysis of ambient air - Determination of particulate matter - Deposited matter - Gravimetric method.
- AS3580.9.6 Methods for sampling and analysis of ambient air Determination of suspended particulate matter PM10 high volume sampler with size-selective inlet Gravimetric method
- AS3580.9.9 Methods for sampling and analysis of ambient air Determination of suspended particulate matter PM10 low volume sampler Gravimetric sampler.

"Australian Standard 2187" means Australian Standard 2187.0:1998 Explosives—Storage, transport and use, Part 0, Australian Standard 2187.1:1998 Explosives—Storage, transport and use Part 1 and Australian Standard 2187.2:2006 Explosives—Storage and use, Part 2 or any updated versions that becomes available from time to time.

"Authority" means an environmental authority.

"Background Noise Level" means the sound pressure level, measured in the absence of the noise under investigation, as the $L_{A90,T}$ being the A-weighted sound pressure level exceeded for 90 per cent of the measurement time period T of not less than 15 minutes, using Fast response.

"Bed and Banks" for a watercourse or wetland means land over which the water of the watercourse or wetland normally flows or that is normally covered by the water, whether permanently or intermittently; but does not include land adjoining or adjacent to the bed or banks that is from time to time covered by floodwater.

"Being or Intended to be Utilised by the Landholder or Overlapping Tenure Holder" for significantly disturbed land, means there is a written agreement (e.g. land and compensation agreement) between the landholder or the overlapping tenure holder and the holder of the environmental authority identifying that the landholder or the overlapping tenure holder has a preferred use of the land such that rehabilitation standards for revegetation by the holder of the environmental authority are not required.

For dams, means there is a written agreement (e.g. land and compensation agreement) between the landholder or the overlapping tenure holder and the holder of the environmental authority identifying that the landholder or the overlapping tenure holder has a preferred use for the dam such that rehabilitation standards for revegetation by the holder of the environmental authority are not required.

“**Bore**” means a water observation bore or a water supply bore that is either sub-artesian or artesian.

“**Brine**” means saline water with a total dissolved solid concentration greater than 40,000 mg/l.

- “**Bund or bunded**” in relation to spill containment systems for fabricated or manufactured tanks or containers designed to a recognised standard means an embankment or wall of brick, stone, concrete or other impervious material which may form part or all of the perimeter of a compound and provides a barrier to retain liquid. Since the bund is the main part of a spill containment system, the whole system (or bunded area) is sometimes colloquially referred to within industry as the bund. The bund is designed to contain spillages and leaks from liquids used, stored or processed above ground and to facilitate clean-up operations. As well as being used to prevent pollution of the receiving environment, bunds are also used for fire protection, product recovery and process isolation.

“**Business Day**” has the meaning in the *Acts Interpretation Act 1954* and *Environmental Protection Act 1994* and means a day that is not—

- a Saturday or Sunday; or
- public holiday, special holiday or bank holiday in the place in which any relevant act is to be or may be done; or
- a business day that occurs during the period starting on 20 December in a year and ending on 5 January in the following year.

“**BTEX**” means benzene, toluene, ethylbenzene, ortho-xylene, paraxylene, meta-xylene and total xylene.

“**Category A Environmentally Sensitive Area**” means any area listed in Schedule 12, Section 1 of the *Environmental Protection Regulation 2008*.

“**Category B Environmentally Sensitive Area**” means any area listed in Schedule 12, Section 2 of the *Environmental Protection Regulation 2008*.

“**Category C Environmentally Sensitive Area**” means any of the following areas:

- Nature Refuges as defined under the *Nature Conservation Act 1992*;
- Koala Habitat Areas as defined under the *Nature Conservation (Koala) Conservation Plan 2006*;
- State Forests or Timber Reserves as defined under the *Forestry Act 1959*;
- Regional parks (resource use area) under the *Nature Conservation Act 1992*;
- An area validated as “Essential Habitat” from ground-truthing surveys in accordance with the Vegetation Management Act 1999 for a species of wildlife listed as endangered or vulnerable under the *Nature Conservation Act 1992*;
- Of Concern Regional Ecosystems that are remnant vegetation identified in the database called ‘RE description database’ containing Regional Ecosystem numbers and descriptions.

“**Certifying or Certify or Certified or Certification**” in relation to a dam, means assessment and approval must be undertaken by a suitably qualified and experienced person in relation to any assessment or documentation required by this Manual, including design plans, ‘as constructed’ drawings and specifications, construction, operation or an annual report regarding regulated structures, undertaken in accordance with the Board of Professional Engineers of Queensland Policy Certification by RPEQs (ID: 1.4 (2A))

“**Certifying or Certify or Certified or Certification**” in relation to any matter other than a design plan, ‘as constructed’ drawings or an annual report regarding dams means, a Statutory Declaration by a suitably qualified person or suitably qualified third party accompanying the written document stating:

- The person’s qualifications and experience relevant to the function;

- that the person has not knowingly included false, misleading or incomplete information in the document;
- that the person has not knowingly failed to reveal any relevant information or document to the administering authority;
- that the document addresses the relevant matters for the function and is factually correct; and
- that the opinions expressed in the document are honestly and reasonably held.

“Clearing” for vegetation:

- (a) means remove, cut down, ringbark, push over, poison or destroy in any way including by burning, flooding or draining; but
- (b) does not include destroying standing vegetation by stock, or lopping a tree.

“Closed-Loop Systems” means using waste on site in a way that does not release waste or contaminants in the waste to the environment.

“Coal Seam Gas Water” means underground water brought to the surface of the earth, or moved underground in connection with exploring for, or producing coal seam gas.

“Commercial species” means species as listed in parts 1, 2 and 3 of Schedule 6 of the Vegetation Management Regulation 2012, which are above the diameters / sizes specified in this Schedule for each listed species.

“Construction or Constructed” in relation to a dam includes building a new dam and modifying or lifting an existing dam, but does not include investigations and testing necessary for the purpose of preparing a design plan.

“Consequence” in relation to a structure as defined, means the potential for environmental harm resulting from the collapse or failure of the structure to perform its primary purpose of containing, diverting or controlling **flowable substances**.

“Consequence Category” means a category, either low, significant or high, into which a dam is assessed as a result of the application of tables and other criteria in the Manual for assessing consequence categories and hydraulic performance of structures (ESR/2016/1933).

“Control Measure” has the meaning in section 47 of the *Environmental Protection Regulation 2008* and means a device, equipment, structure, or management strategy used to prevent or control the release of a contaminant or waste to the environment.

“Daily Peak Design Capacity” for sewage treatment works, has the meaning in Schedule 2, section 63(4) of the *Environmental Protection Regulation 2008* as the higher equivalent person (EP) for the works calculated using each of the formulae found in the definition for EP.

“Dam” means a land-based structure or a **void** that contains, diverts or controls flowable substances, and includes any substances that are thereby contained, diverted or controlled by that land-based structure or void and **associated works**.

“Dam Crest Volume” means the volume of material (liquids and/or solids) that could be within the walls of a dam at any time when the upper level of that material is at the crest level of that dam. That is, the instantaneous maximum volume within the walls, without regard to flows entering or leaving (for example, via **spillway**).

“Development Well” means a petroleum well which produces or stores petroleum. For clarity, a development well does not include an appraisal well.

“Document” has the meaning in the *Acts Interpretation Act 1954* and means:

- any paper or other material on which there is writing; and
- any paper or other material on which there are marks; and
- figures, symbols or perforations having a meaning for a person qualified to interpret them; and

- any disc, tape or other article or any material from which sounds, images, writings or messages are capable of being produced or reproduced (with or without the aid of another article or device).

“Design Plan” is a document setting out how all identified consequence scenarios are addressed in the planned design and operation of a regulated structure.

“Design Storage Allowance or DSA” means an available volume, estimated in accordance with the Manual for assessing consequence categories and hydraulic performance of structures (ESR/2016/1933) published by the administering authority, must be provided in a dam as at 1 November each year in order to prevent a discharge from that dam to an **annual exceedance probability (AEP)** specified in that Manual.

“Ecologically Dominant Layer” has the meaning in the Methodology for Surveying and Mapping of Regional Ecosystems and Vegetation Communities in Queensland (Version 3.2 August 2012) and means the layer making the greatest contribution to the overall biomass of the site and the vegetation community (NLWRA 2001). This is also referred to as the ecologically dominant stratum or the predominant canopy in woody ecosystems.

“Ecosystem Function” means the interactions between and within living and nonliving components of an ecosystem and generally correlates with the size, shape and location of the vegetation community.

“Emergency Action Plan” means documentation forming part of the operational plan held by the holder or a nominated responsible officer, that identifies emergency conditions that sets out procedures and actions that will be followed and taken by the dam owner and operating personnel in the event of an emergency. The actions are to minimise the risk and consequences of failure, and ensure timely warning to affected persons and the implementation of protection measures. The plan must require dam owners to annually review and update contact information where required.

“Enclosed Flare” means a device where the residual gas is burned in a cylindrical or rectilinear enclosure that includes a burning system and a damper where air for the combustion reaction is admitted.

“Environmental Harm” has the meaning in section 14 of the *Environmental Protection Act 1994* and means any adverse effect, or potential adverse effect (whether temporary or permanent and of whatever magnitude, duration or frequency) on an environmental value, and includes environmental nuisance.

Environmental harm may be caused by an activity

- (a) whether the harm is a direct or indirect result of the activity; or
- (b) whether the harm results from the activity alone or from the combined effects of the activity and other activities or factors.

“Environmental Nuisance” has the meaning in section 15 of the *Environmental Protection Act 1994* and means unreasonable interference or likely interference with an environmental value caused by

- (a) aerosols, fumes, light, noise, odour, particles or smoke; or
- (b) an unhealthy, offensive or unsightly condition because of contamination; or
- (c) another way prescribed by regulation.

“Equivalent Person” or **“EP”** has the meaning under section 3 of the Planning Guidelines for Water Supply and Sewerage, 2005, published by the Queensland Government. It is calculated in accordance with Schedule 2, Section 63(4) of the *Environmental Protection Regulation 2008* where:

- $EP = V/200$ where V is the volume, in litres, of the average dry weather flow of sewage that can be treated at the works in a day; or
- $EP = M/2.5$ where M is the mass, in grams, of phosphorus in the influent that the works are designed to treat as the inlet load in a day.

“Exploration Well” means a petroleum well that is drilled to:

- explore for the presence of petroleum or natural underground reservoirs suitable for storing petroleum; or

- obtain stratigraphic information for the purpose of exploring for petroleum.

For clarity, an exploration well does not include an appraisal or development well.

“Extreme Storm Storage” – means a storm storage allowance determined in accordance with the criteria in the *Manual for assessing consequence categories and hydraulic performance of structures (ESR/2016/1933)* published by the administering authority.

“Flare Pit” has the meaning in the *Manual for Assessing Consequence Categories and Hydraulic Performance of Structures (ESR/2016/1933)*, and means containment area where any hydrocarbon that is discovered in an over-pressured reservoir during a drilling operation is diverted to, and combusted, The flare pit is only used during the drilling and work over process on a petroleum well.

“Flare Precipitant” means waste fluids which result from the operation of a flare.

“Floodplains” has the meaning in the *Water Act 2000* and means an area of reasonably flat land adjacent to a watercourse that:

- is covered from time to time by floodwater overflowing from the watercourse; and
- does not, other than in an upper valley reach, confine floodwater to generally follow the path of the watercourse; and
- has finer sediment deposits than the sediment deposits of any bench, bar or in-stream island of the watercourse.

“Flowable Substance” means matter or a mixture of materials which can flow under any conditions potentially affecting that substance. Constituents of a flowable substance can include water, other liquids fluids or solids, or a mixture that includes water and any other liquids fluids or solids either in solution or suspension.

“Fuel Burning or Combustion Facility” means a permanent fuel burning or combustion equipment which in isolation, or combined in operation, or which are interconnected, is, or are capable of burning more than 500 kg of fuel in an hour.

“GDA” means Geocentric Datum of Australia.

“General Ecologically Significant Wetland” otherwise known as “wetlands of other environmental value”, is a wetland that meets the definition of a wetland and that is shown as a general ecologically significant wetland or “wetland of other environmental value” on the **map of referable wetlands**.

“Great Artesian Basin (GAB) spring” means an area protected under the *Environment Protection and Biodiversity Conservation Act 1999* because it is considered to be a Matter of National Environmental Significance and identified as a:

- community of native species dependent on natural discharge of groundwater from the Great Artesian Basin; or
- **Great Artesian Basin spring**; or
- Great Artesian Basin discharge spring wetland.

A GAB spring includes a spring vent, spring complex or watercourse spring and includes the land to which water rises naturally from below the ground and the land over which the water then flows.

Note: The Australian Government’s Protected Matters Search Tool should be used to get an indication of whether the area of interest may contain an MNES spring.

Note: The GAB springs dataset can be requested from the Queensland Government Herbarium

“Greywater” means wastewater generated from domestic activities such as laundry, dishwashing, and bathing. Greywater does not include sewage.

“Groundwater Dependent Ecosystems (GDE)” means ecosystems which require access to groundwater on a permanent or intermittent basis to meet all or some of their water requirements so as to maintain their communities of plants and animals, ecological processes and ecosystem services.

For the purposes of the environmental authority, groundwater dependent ecosystems do not include those mapped as “unknown”.

“**Growing**” means to increase by natural development, as any living organism or part thereof by assimilation of nutriment; increase in size or substance.

“**Holder**” means any person who is the holder of, or is acting under, that environmental authority.

“**Hydraulic Performance**” means the capacity of a regulated dam to contain or safely pass flowable substances based on the design criteria specified for the relevant consequence category in the *Manual for assessing consequence categories and hydraulic performance of structures (ESR/2016/1933)*.

“**Hydraulic Testing**” means the testing of a geological formation to evaluate the hydrogeological characteristics of the formation.

“**Impulsive (for noise)**” means sound characterised by brief excursions of sound pressure (acoustic impulses) that significantly exceed the background sound pressure. The duration of a single impulsive sound is usually less than one second.

“**Incidental Activity**” for this environmental authority means an activity that is not a specified relevant activity and is necessary to carry out the activities listed in Schedule A, Table 1 – Scale and Intensity for the Activities.

“**L_{Aeq,adj, 15mins}**” means the A-weighted sound pressure level of a continuous steady sound, adjusted for tonal character, that within any 15 minute period has the same square sound pressure as a sound level that varies with time.

“**Land Degradation**” has the meaning in the *Vegetation Management Act 1999* and means the following:

- soil erosion
- rising water tables
- the expression of salinity
- mass movement by gravity of soil or rock
- stream bank instability
- a process that results in declining water quality.

“**Landholders’ Active Groundwater Bores**” means bores that are able to continue to provide a reasonable yield of water in terms of quantity for the bores authorised purpose or use. This term does not include monitoring bores owned by the administering authority of the *Water Act 2000*.

“limited impact camp” mean accommodation camps that:

- are temporary (no more than 6 months);
- are located within pre-existing areas of clearing or significant disturbance;
- are up to 2 ha or located within **well sites**; and
- may involve sewage treatment works that are no release works or release works that involve an irrigation release within pre-existing areas of clearing or significant disturbance.

“**Levee**” means an embankment that only provides for the containment and diversion of stormwater or flood flows from a contributing catchment, or containment and diversion of flowable materials resulting from releases from other works, during the progress of those stormwater or flood flows or those releases; and does not store any significant volume of **water** or **flowable substances** at any other times.

“**Limited Impact Camps**” mean accommodation camps that:

- are temporary (no more than 6 months);
- are located within pre-existing areas of clearing or significant disturbance;
- are up to 2 ha or located within well sites; and
- may involve sewage treatment works that are no release works or release works that involve an irrigation release within pre-existing areas of clearing or significant disturbance.

“Limited Impact Petroleum Activities” means petroleum activities that are located within areas that are not a regional ecosystem and:

- are single well sites (includes observation, pilot, injection and production wells) greater than 1.25 ha; or
- are multi-well sites greater than 3 ha; and
- may involve construction of new access tracks that are required as part of the construction or servicing a petroleum activity that can be lawfully carried out within an ESA or its protection zone; and
- may involve upgrading or maintenance of existing roads or tracks; and
- may include power and communication lines; and
- may include gas gathering lines from a well site to the initial compression facility; and
- may include water gathering lines from a well site to the initial water storage or dam.

“Limited Petroleum Activities” mean any low impact petroleum activity, and:

- single well sites (includes observation, pilot, injection and production wells) up to 1 ha and associated infrastructure (water pumps and generators, sumps, flare pits or dams) located on the well site or up to 1.25 ha if the well pad includes the use of a tank (minimum 1ML) for above ground fluid storage,
- multi-well sites up to an additional (in addition to single well site above) 0.25 ha per additional well and associated infrastructure (water pumps and generators, sumps, flare pits, dams or tanks) located on the well site to a maximum of 3 ha,
- construction of new access tracks that are required as part of the construction or servicing a petroleum activity that can be lawfully carried out within an ESA or its protection zone upgrading or maintenance of existing roads or tracks,
- power and communication lines,
- gas gathering lines from a well site to the initial compression facility,
- water gathering lines from a well site to the initial water storage or dam,
- camps within well site that may involve sewage treatment works that are a no release works.

“Linear Infrastructure” means powerlines, pipelines, flowlines, roads and access tracks.

“Long Term Noise Event” means a noise exposure, when perceived at a sensitive receptor, persists for a period of greater than five (5) days, even when there are respite periods when the noise is inaudible within those five (5) days.

“Low Consequence Dam” means any dam that is not a high or significant consequence category as assessed using the *Manual for assessing consequence categories and hydraulic performance of structures (ESR/2016/1933)*.

“Low Impact Petroleum Activities” means petroleum activities which do not result in the clearing of native vegetation, earthworks or excavation work that cause either, a significant disruption to the soil profile or

permanent damage to vegetation that cannot be easily rehabilitated immediately after the activity is completed. Examples of such activities include but are not necessarily limited to:

- chipholes
- coreholes
- geophysical surveys
- seismic surveys
- soil surveys
- topographic surveys
- cadastral surveys
- ecological surveys
- installation of environmental monitoring equipment (including surface water)

“Mandatory Reporting Level or MRL” means a warning and reporting level determined in accordance with the criteria in the *Manual for assessing consequence categories and hydraulic performance of structures* (ESR/2016/1933) published by the administering authority.

“Manual” in reference to dams means the *Manual for assessing consequence categories and hydraulic performance of structures* (ESR/2016/1933) published by the administering authority, as amended from time to time.

“Map of Referrable Wetlands” has the meaning in Schedule 12 of the Environmental Protection executive on 4 November 2011 and published by the department, as amended from time to time by the chief executive under section 144D.

“Max $L_{pA, 15 \text{ min}}$ ” means the absolute maximum instantaneous A-weighted sound pressure level, measured over 15 minutes.

“Max $L_{pZ, 15 \text{ min}}$ ” means the maximum value of the Z-weighted sound pressure level measured over 15 minutes.

“Medium Term Noise Event” is a noise exposure, when perceived at a sensitive receptor, persists for an aggregate period not greater than five (5) days and does not re-occur for a period of at least four (4) weeks. Re-occurrence is deemed to apply where a noise of comparable level is observed at the same receptor location for a period of one hour or more, even if it originates from a different source or source location.

“Methodology” means the science of method, especially dealing with the logical principles underlying the organisation of the various special sciences, and the conduct of scientific inquiry.

“Mix-Bury-Cover Method” means the stabilisation of residual drilling solids in the bottom of a sump by mixing with subsoil and which occurs in accordance with the following methodology:

- the base of the subsoil and residual solid mixture must be separated from the groundwater table by at least one metre of a continuous layer of impermeable subsoil material ($k_w=10^{-8} \text{ m/s}$) or subsoil with a clay content of greater than 20%; and
- the residual solids is mixed with subsoil in the sump and cover; and
- the subsoil and residual solids is mixed at least three parts subsoil to one part waste (v/v); and
- a minimum of one metre of clean subsoil must be placed over the subsoil and residual solids mixture; and
- topsoil is replaced.

“Month” has the meaning in the *Acts Interpretation Act 1954* and means a calendar month and is a period starting at the beginning of any day of one (1) of the 12 named months and ending:

- immediately before the beginning of the corresponding day of the next named month; or

- if there is no such corresponding day at the end of the next named month.

“NATA Accreditation” means accreditation by the National Association of Testing Authorities Australia.

“Operational Plan” includes:

- (a) normal operating procedures and rules (including clear documentation and definition of process inputs in the DSA);
- (b) contingency and emergency action plans including operating procedures designed to avoid and/or minimise environmental impacts including threats to human life resulting from any overtopping or loss of structural integrity of the regulated structure.

“Pipeline Waste Water” means hydrostatic testing water, flush water or water from low point drains.

“Pre-Disturbed Land Use” means the function or use of the land as documented prior to significant disturbance occurring at that location.

“Predominant Species” has the meaning in the Methodology for Surveying and Mapping of Regional Ecosystems and Vegetation Communities in Queensland (Version 3.2 August 2012) and means a species that contributes most to the overall above-ground biomass of a particular stratum.

“Primary Protection Zone” means an area within 200m from the boundary of any Category A, B or C Environmentally Sensitive Area.

“Produced Water” has the meaning in Section 15A of the *Petroleum and Gas (Production and Safety) Act 2004* and means CSG water or **associated water** for a petroleum tenure.

“Prohibited or Restricted Pest Species” means any pest that is:

- (a) a plant or animal, other than a native species of plant or animal, that is
 - i. invasive biosecurity matter under the Biosecurity Act 2014 (Qld); or

Notes—

1 See the Biosecurity Act 2014, schedule 1, part 3 or 4 or schedule 2, part 2; and

2 See the note to the Biosecurity Act 2014, schedules 1 and 2.

- ii. controlled biosecurity matter or regulated biosecurity matter under the Biosecurity Act 2014 (Qld)
- iii. tramp ants listed in schedule 1 and schedule 2 of the Biosecurity Act 2014 (Qld)
- (b) a pest declared under a local law by the local government for the Land to be a pest because the pest is causing, or has the potential to cause, an adverse environmental, economic or social impact in all or part of the local government area.

“Register of Regulated Structures” includes:

- (a) Date of entry in the register;
- (b) Name of the structure, its purpose and intended/actual contents;
- (c) The consequence category of the dam as assessed using the *Manual for assessing consequence categories and hydraulic performance of structures* (ESR/2016/1933);
- (d) Dates, names, and reference for the design plan plus dates, names, and reference numbers of all document(s) lodged as part of a design plan for the dam;
- (e) Name and qualifications of the suitably qualified and experienced person who certified the design plan and 'as constructed' drawings;
- (f) For the regulated dam, other than in relation to any **levees** –

- i. The dimensions (metres) and surface area (hectares) of the dam measured at the footprint of the dam;
 - ii. Coordinates (latitude and longitude in GDA94) within five metres at any point from the outside of the dam including its storage area
 - iii. **Dam crest volume** (megalitres);
 - iv. Spillway crest level (metres AHD).
 - v. Maximum operating level (metres AHD);
 - vi. Storage rating table of stored volume versus level (metres AHD);
 - vii. Design storage allowance (megalitres) and associated level of the dam (metres AHD);
 - viii. Mandatory reporting level (metres AHD);
- (g) The design plan title and reference relevant to the dam;
- (h) The date construction was certified as compliant with the design plan;
- (i) The name and details of the suitably qualified and experienced person who certified that the constructed dam was compliant with the design plan;
- (j) Details of the composition and construction of any liner;
- (k) The system for the detection of any leakage through the floor and sides of the dam;
- (l) Dates when the regulated dam underwent an annual inspection for structural and operational adequacy, and to ascertain the available storage volume for 1 November of any year;
- (m) Dates when recommendations and actions arising from the annual inspection were provided to the administering authority;
- (n) Dam water quality as obtained from any monitoring required under this authority as at 1 November of each year.

“Regulated Structure” means any structure in the significant or high consequence category as assessed using the *Manual for assessing consequence categories and hydraulic performance of structures* (ESR/2016/1933) published by the administering authority. A regulated structure does not include:

- a fabricated or manufactured tank or container, designed and constructed to an Australian Standard that deals with strength and structural integrity of that tank or container;
- a sump or earthen pit used to store residual drilling material and drilling fluid only for the duration of drilling and well completion activities;
- a flare pit.

“Rehabilitation or Rehabilitated” means the process of reshaping and **revegetating** land to restore it to a stable landform and in accordance with acceptance criteria and, where relevant, includes remediation of contaminated land. For the purposes of pipeline rehabilitation, rehabilitation includes reinstatement, revegetation and **restoration**.

“Reinstate or Reinstatement” for pipelines, means the process of bulk earth works and structural replacement of pre-existing conditions of a site (i.e. soil surface topography, watercourses, culverts, fences and gates and other landscape(d) features) and is detailed in the APGA Code of Environmental Practice: Onshore Pipelines Revision 4 (2017).

“Reporting Limit” means the lowest concentration that can be reliably measured within specified limits of precision and accuracy during routine laboratory operating conditions. For many analytes, the reporting limit is selected as the lowest non-zero standard in the calibration curve. Results that fall below the reporting limit will be reported as “less than” the value of the reporting limit. The reporting limit is also referred to as the practical quantitation limit or the limit of quantitation. For polycyclic aromatic hydrocarbons, the reporting limit

must be based on super-ultra trace methods and, depending on the specific polycyclic aromatic hydrocarbon, will range between 0.005 ug/L 0.02 ug/L.

“Residual Drilling Material” means waste drilling materials including muds and cuttings or cement returns from well holes and which have been left behind after the drilling fluids are pumped out.

“Restoration” means the replacement of structural habitat complexity, ecosystems processes, services and function from a disturbed or degraded site to that of a pre-determined or **analogue site**. For the purposes of pipelines, restoration applies to final rehabilitation after pipeline decommissioning.

“Restricted Stimulation Fluids” has the meaning in section 206 of the *Environmental Protection Act 1994* and means fluids used for the purpose of stimulation, including fracturing, that contain the following chemicals in more than the maximum amount prescribed under a regulation:

- (a) petroleum hydrocarbons containing benzene, ethylbenzene, toluene or xylene
- (b) chemicals that produce, or are likely to produce, benzene, ethylbenzene, toluene or xylene as the chemical breaks down in the environment.

“Revegetation or Revegetating or Revegetate” means to actively re-establish vegetation through seeding or planting techniques in accordance with site specific management plans.

“Secondary Protection Zone” in relation to a Category A or Category B ESA means an area within 100 metres from the boundary of the primary protection zone.

“Sensitive Place” means:

- a dwelling (including residential allotment, mobile home or caravan park, residential marina or other residential premises, motel, hotel or hostel);
- a library, childcare centre, kindergarten, school, university or other educational institution;
- a medical centre, surgery or hospital;
- a protected area;
- a public park or garden that is open to the public (whether or not on payment of money) for use other than for sport or organised entertainment;
- a work place used as an office or for business or commercial purposes, which is not part of the petroleum activity(ies) and does not include employees accommodation or public roads; and
- for noise, a place defined as a sensitive receptor for the purposes of the *Environmental Protection (Noise) Policy 2008*.

“Sensitive Receptor” is defined in Schedule 2 of the *Environmental Protection (Noise) Policy 2008*, and means an area or place where noise is measured.

“Short Term Noise Event” is a noise exposure, when perceived at a sensitive receptor, persists for an aggregate period not greater than eight hours and does not re-occur for a period of at least seven (7) days. Re-occurrence is deemed to apply where a noise of comparable level is observed at the same receptor location for a period of one hour or more, even if it originates from a different source or source location.

“Significantly Disturbed or Significant Disturbance or Significant Disturbance to Land or Areas” has the meaning in Schedule 12, section 4 of the *Environmental Protection Regulation 2008*. Land is significantly disturbed if:

- (a) it is contaminated land; or
- (b) it has been disturbed and human intervention is needed to rehabilitate it
 - i. to a condition required under the relevant environmental authority; or
 - ii. if the environmental authority does not require the land to be rehabilitated to a particular condition to the condition it was in immediately before the disturbance.

“Species Richness” means the number of different species in a given area.

“Specified Relevant Activities” for this environmental activity means an activity that:

- (a) but for being carried out as a resource activity, would otherwise be an activity prescribed under section 19 of the *Environmental Protection Act 1994* as an environmentally relevant activity; or
- (b) stimulation activities; or
- (c) extracting material other than by dredging

“Spillway” means a weir, channel, conduit, tunnel, gate or other structure designed to permit discharges from the dam, normally under flood conditions or in anticipation of flood conditions.

“Stable” has the meaning in Schedule 5 of the *Environmental Protection Regulation 2008* and, for a site, means the rehabilitation and **restoration** of the site is enduring or permanent so that the site is unlikely to collapse, erode or subside.

“Stimulation” means a technique used to increase the permeability of a natural underground reservoir that is undertaken above the formation pressure and involves the addition of chemicals. It includes hydraulic fracturing / hydrofracturing, fracture acidizing and the use of proppant treatments.

“Stimulation Fluid” means the fluid injected underground to increase permeability. For clarity, the term stimulation fluid only applies to fluid injected down well post-perforation.

“Stimulation Impact Zone” means a 100m maximum radial distance from the stimulation target location within a gas producing formation.

“Structure” for the purpose of Schedule H means dam or levee.

“Suitably Qualified Person” means a person who has professional qualifications, training or skills or experience relevant to the nominated subject matters and can give authoritative assessment, advice and analysis to performance relative to the subject matters using the relevant protocols, standards, methods or literature.

“Suitably Qualified and Experienced Person” in relation to regulated structures means a person who is a Registered Professional Engineer of Queensland (RPEQ) under the provisions of the *Professional Engineers Act 2002*, and has demonstrated competency and relevant experience:

- for regulated dams, an RPEQ who is a civil engineer with the required qualifications in dam safety and dam design
- for regulated levees, an RPEQ who is a civil engineer with the required qualifications in the design of flood protection embankments.

Note: It is permissible that a suitably qualified and experienced person obtain subsidiary certification from an RPEQ who has demonstrated competence and relevant experience in either geomechanics, hydraulic design or engineering hydrology.

“Suitably Qualified Third Party” means a person who:

- (a) has qualifications and experience relevant to performing the function including but not limited to:
 - i. a bachelor's degree in science or engineering; and
 - ii. 3 years' experience in undertaking soil contamination assessments; and
- (b) is a member of at least one organisation prescribed in Schedule 8 of the *Environmental Protection Regulation 2008*; and
- (c) not be an employee of, nor have a financial interest or any involvement which would lead to a conflict of interest with the holder(s) of the environmental authority.

“Sump” means a pit in which waste residual drilling material or drilling fluids are stored only for the duration of drilling activities.

“Synthetic Based Drilling Mud” means a mud where the base fluid is a synthetic oil, consisting of chemical compounds which are artificially made or synthesised by chemically modifying petroleum components or other raw materials rather than the whole crude oil.

“System Design Plan” means a plan that manages an integrated containment system that shares the required DSA and/or ESS volume across the integrated containment system.

“Third Party Auditor” means a suitably qualified person who is either a certified third party auditor or an internal auditor employed by the holder of the environmental authority and the person is independent of the day to day management and operation of the petroleum activity(ies) covered by this environmental authority.

“Top Soil” means the surface (top) layer of a soil profile, which is more fertile, darker in colour, better structured and supports greater biological activity than underlying layers. The surface layer may vary in depth depending on soil forming factors, including parent material, location and slope, but generally is not greater than about 300mm in depth from the natural surface.

“Total Density of Coarse Woody Material” means the total length of logs on the ground greater than or equal to 10cm diameter per hectare and number of logs on the ground greater than or equal to 10cm diameter per hectare.

“Transmissivity” means the rate of flow of water through a vertical strip of aquifer which is one unit wide and which extends the full saturated depth of the aquifer.

“Valid complaint” means all complaints unless considered by the administering authority to be frivolous, vexatious or based on mistaken belief.

“Void” means any constructed, open excavation in the ground.

“Waste and Resource Management Hierarchy” has the meaning provided in section 9 of the *Waste Reduction and Recycling Act 2011* and is the following precepts, listed in the preferred order in which waste and resource management options should be considered:

- (a) AVOID unnecessary resource consumption;
- (b) REDUCE waste generation and disposal
- (c) RE-USE waste resources without further manufacturing
- (d) RECYCLE waste resources to make the same or different products
- (e) RECOVER waste resources, including the recovery of energy
- (f) TREAT waste before disposal, including reducing the hazardous nature of waste
- (g) DISPOSE of waste only if there is no viable alternative.

“Waste and Resource Management Principles” has the meaning provided in section 4(2)(b) of the *Waste Reduction and Recycling Act 2011* and means the:

- (a) polluter pays principle
- (b) user pays principle
- (c) proximity principle
- (d) product stewardship principle.

“Waste Fluids” has the meaning in section 13 of the *Environmental Protection Act 1994* in conjunction with the common meaning of “fluid” which is “a substance which is capable of flowing and offers no permanent resistance to changes of shape”. Accordingly, to be a waste fluid, the waste must be a substance which is capable of flowing and offers no permanent resistance to changes of shape.

“Watercourse” has the meaning in Schedule 4 of the *Environmental Protection Act 1994* and means:

- 1) a river, creek or stream in which water flows permanently or intermittently
 - a) in a natural channel, whether artificially improved or not; or

- b) in an artificial channel that has changed the course of the watercourse.
- 2) Watercourse includes the bed and banks and any other element of a river, creek or stream confining or containing water.

“Waters” includes all or any part of a creek, river, stream, lake, lagoon, swamp, wetland, spring, unconfined surface water, unconfined water in natural or artificial watercourses, bed and bank of any waters, non-tidal or tidal waters (including the sea), stormwater channel, stormwater drain, roadside gutter, stormwater run-off, and underground water.

“Wet Season” means the time of year, covering one or more months, when most of the average annual rainfall in a region occurs. For the purposes of DSA determination this time of year is deemed to extend from 1 November in one year to 31 May in the following year inclusive.

“Well Integrity” means the ability of a well to contain the substances flowing through it.

“Well Site” means a maximum area of land disturbance for the purposes of constructing, installing and operating an exploration, appraisal or development well or such wells as part of a multi-well arrangement and includes well lease infrastructure.

“Wetland” for the purpose of this environmental authority, wetland means:

- areas shown on the Map of referable **wetlands** which is a document approved by the chief executive on 4 November 2011 and published by the department, as amended from time to time by the chief executive under section 144D of the *Environmental Protection Regulation 2008*; and
- areas defined under the Queensland Wetlands Program as permanent or periodic / intermittent inundation, with water that is static or flowing fresh, brackish or salt, including areas of marine water, the depth of which at low tide does not exceed six (6) metres, and possess one or more of the following attributes:
 - at least periodically, the land supports plants or animals that are adapted to and dependent on living in wet conditions for at least part of their life cycle, or
 - the substratum is predominantly undrained soils that are saturated, flooded or ponded long enough to develop anaerobic conditions in the upper layers, or
 - the substratum is not soil and is saturated with water, or covered by water at some time.

The term wetland includes riverine, lacustrine, estuarine, marine and palustrine wetlands; and it does not include a Great Artesian Basin Spring or a subterranean wetland that is a cave or aquifer.

“Wetland of High Ecological Significance” otherwise known as “high conservation value wetland”, is a wetland that meets the definition of a wetland and that is shown as a wetland of high ecological significance or high conservation value wetland on the map

END OF PART B OF ENVIRONMENTAL AUTHORITY