

# PRCP schedule

*Environmental Protection Act 1994*

## PRCP schedule P-PRCP-100730375

This is the approved form for a PRCP schedule issued by the administering authority under Chapter 5 of the Environmental Protection Act 1994.

### PRCP schedule: P-PRCP-100730375

#### PRCP schedule holder(s)

| Name(s)                                   | Registered address                    |
|-------------------------------------------|---------------------------------------|
| QNI Resources Pty Ltd<br>ACN: 054 117 921 | 1 Greenvale Street<br>YABULU QLD 4818 |
| QNI Metal Pty Ltd<br>ACN: 066 656 175     |                                       |

#### Location details

| Location(s)                    |
|--------------------------------|
| Mining Lease (ML) 5864, ML5866 |

#### Take effect

In accordance with section 202B of the *Environmental Protection Act 1994* (EP Act), the PRCP schedule has effect on the day the environmental authority for carrying out relevant activities on land to which the schedule relates takes effect. Pursuant to section 202C of the EP Act, a PRCP schedule continues in force until the environmental authority for the relevant activities to which the PRCP schedule relates is cancelled or surrendered, even if the resource tenure expires or is cancelled and even if the relevant environmental authority is suspended under Chapter 5, part 11 or 11A of the EP Act.

*T. Gibbs*

Signature

27 February 2025

Date

Teale Gibbs  
Department of the Environment, Tourism, Science  
and Innovation  
Delegate of the administering authority  
*Environmental Protection Act 1994*

**Enquiries:**  
Mineral Business Centre  
PO Box 7230, Cairns QLD 4870  
Phone: (07) 4222 5352  
Email: [ESCairns@des.qld.gov.au](mailto:ESCairns@des.qld.gov.au)



**Obligations under the *Environmental Protection Act 1994***

Pursuant to section 202E of the EP Act, if there is an inconsistency between an environmental authority and a PRCP schedule, the environmental authority prevails to the extent of the inconsistency.

Pursuant to section 285 of the EP Act:

- the holder of a PRCP schedule must commission an audit of the schedule by a rehabilitation auditor for the following periods (each an audit period) —
  - (a) the 3-year period starting on the day the schedule takes effect
  - (b) each 3-year period starting on the day after the previous audit period ended.
- the holder must, within 4 months after the end of each audit period, give the administering authority -
  - (a) the rehabilitation auditor's report (an audit report) about the audit that complies with section 286 of the EP Act, and
  - (b) a declaration for the audit report that complies with section 285 of the EP Act.

In addition to the requirements found in the conditions of this PRCP schedule, the holder must also meet their obligations under the environmental authority, the EP Act, and the regulations made under the EP Act. For example, the holder must comply with the following provisions of the EP Act:

- general environmental duty (section 319)
- duty to notify environmental harm (section 320-320G)
- offence of causing serious or material environmental harm (sections 437-439)
- offence of causing environmental nuisance (section 440)
- offence of depositing prescribed water contaminants in waters and related matters (section 440ZG)
- offence to place contaminant where environmental harm or nuisance may be caused (section 443).

**PRCP schedule**

The PRCP schedule incorporates the following sections:

- Section A - Conditions of PRCP schedule
- Section B - Final site design and reference maps
- Section C - Post mining land uses

## Section A - Conditions of PRCP schedule

Pursuant to section 206A of the EP Act:

- it is a condition of this PRCP schedule that, in carrying out a relevant activity under the schedule, the holder must comply with a requirement stated in the environmental authority relevant to carrying out the activity.
- it is a condition of this PRCP schedule that the holder must comply with the following matters stated in the schedule -
  - (a) each rehabilitation milestone and management milestone
  - (b) when each rehabilitation milestone and management milestone is to be achieved

### General conditions


**PRCP1** The holder must comply with each milestone criteria stated in the schedule

**PRCP2** Where a milestone criterion requires any of the following, the holder must keep records of the actions taken to comply with the criterion as well as the results and provide a copy of this information to the Administering Authority on request -

- (i) certifications or assessments to be undertaken;
- (ii) monitoring or maintenance to be carried out;
- (iii) final design plans and/or specifications to be developed; and
- (iv) reports such as contaminated land investigations, rehabilitation reports (including monitoring records), validation reports, Quality Assurance/Quality Control reports.

**PRCP3** Where land becomes available for rehabilitation earlier than the nominated 'Date area is available', progressive rehabilitation for that land must commence as soon as practicable. Progressive rehabilitation commenced early under this condition must be carried out in accordance with the milestones and criteria in this schedule, except that each of the dates by which milestones are to be completed is brought forward by the same amount of time as the commencement was brought forward.

**END OF CONDITIONS**

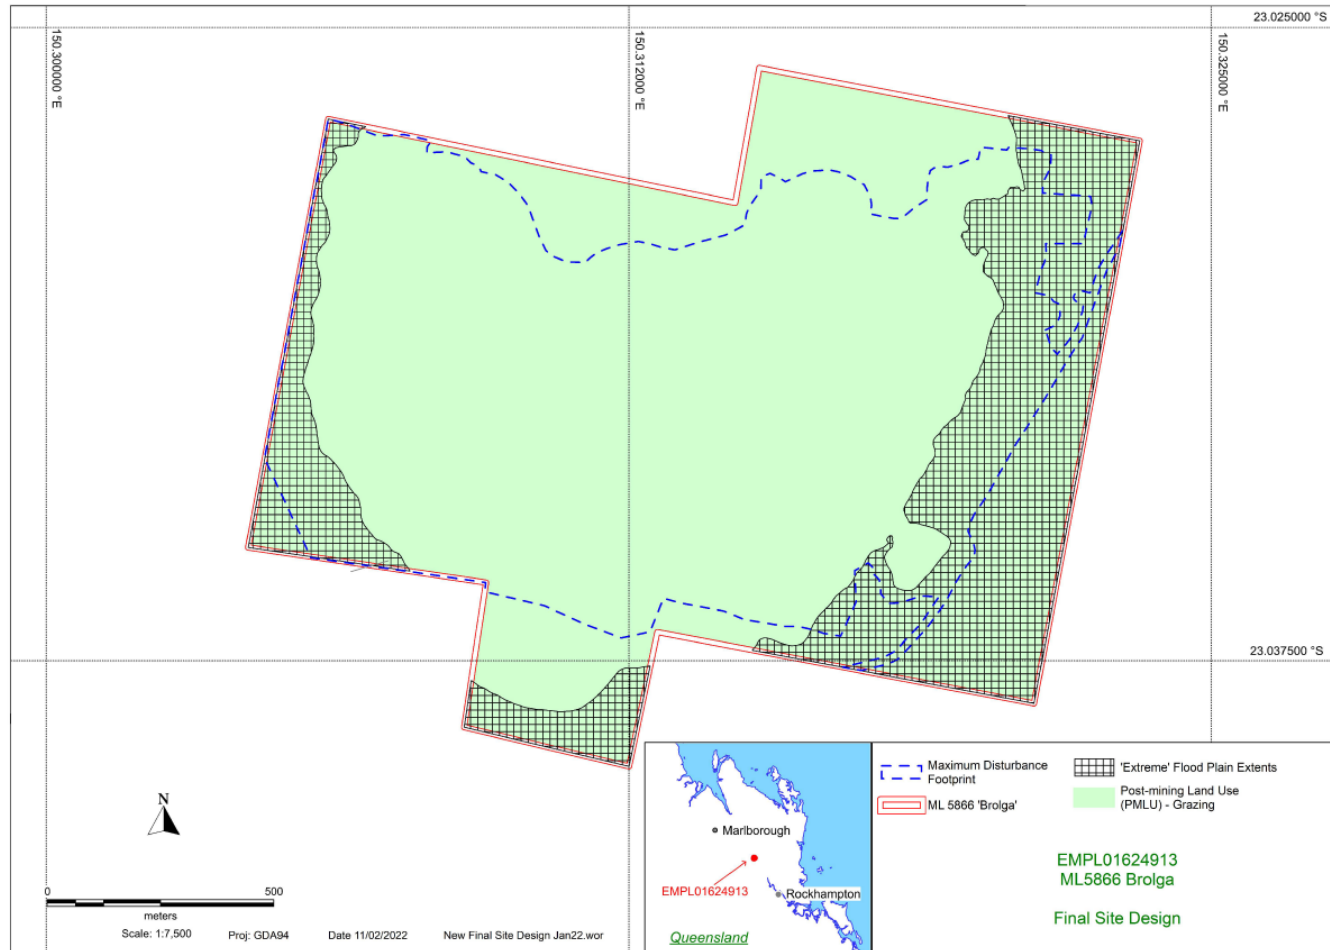**Section B - Final site design and reference maps****Figure 1 – Final Site Design Brolga**

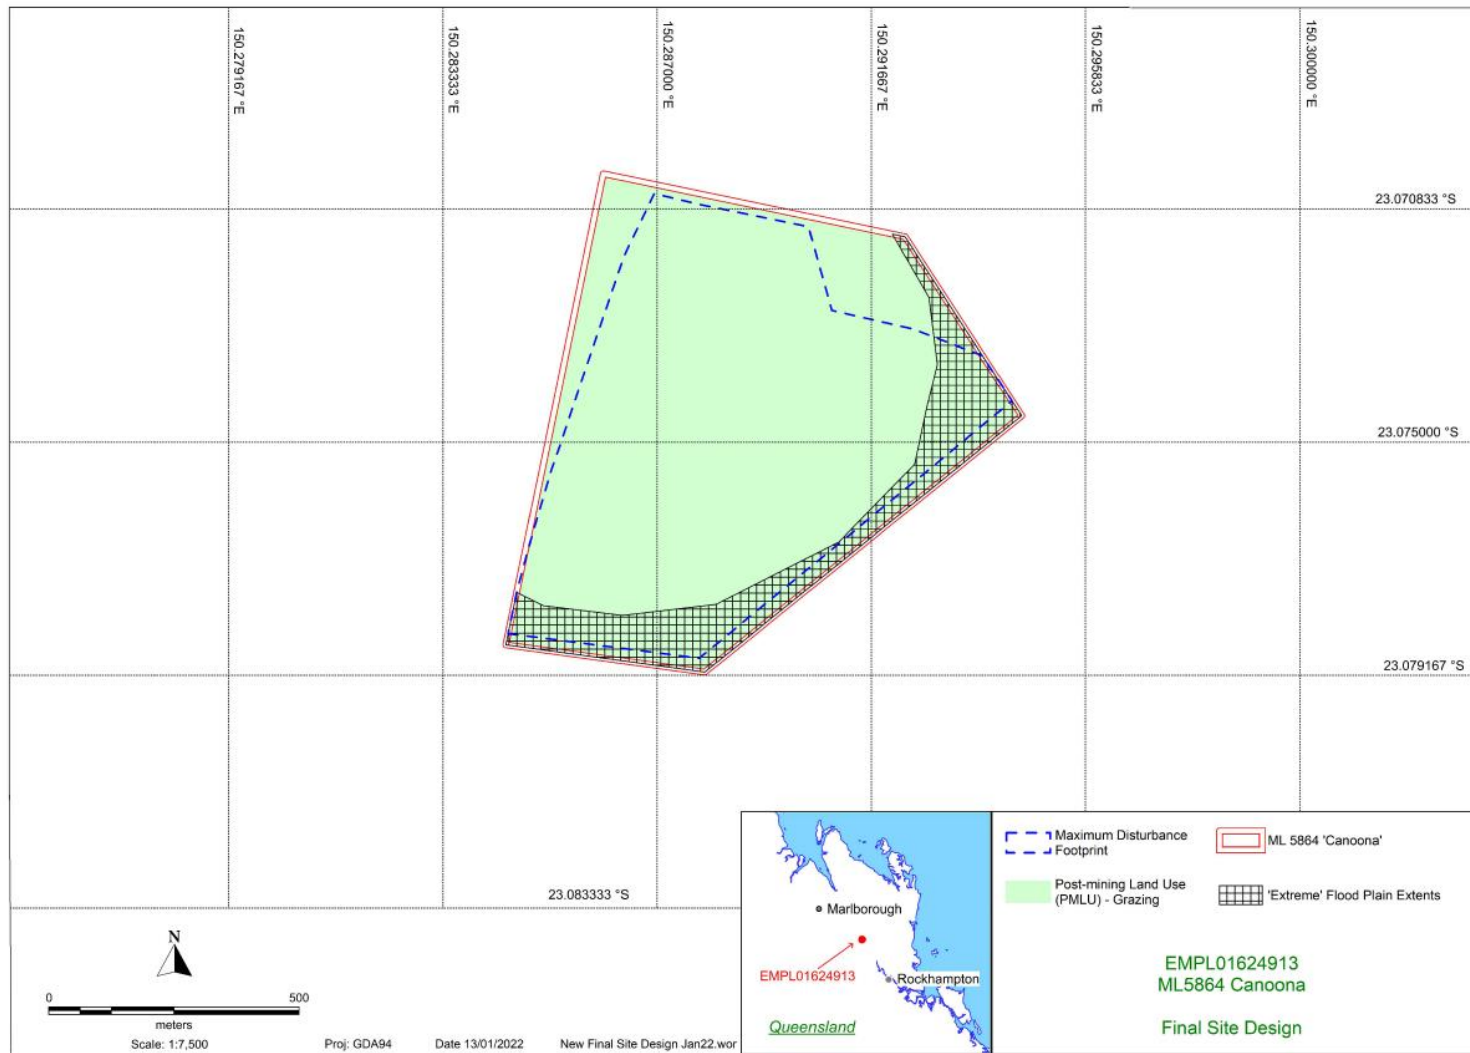


Figure 2 – Final Site Design Canoona

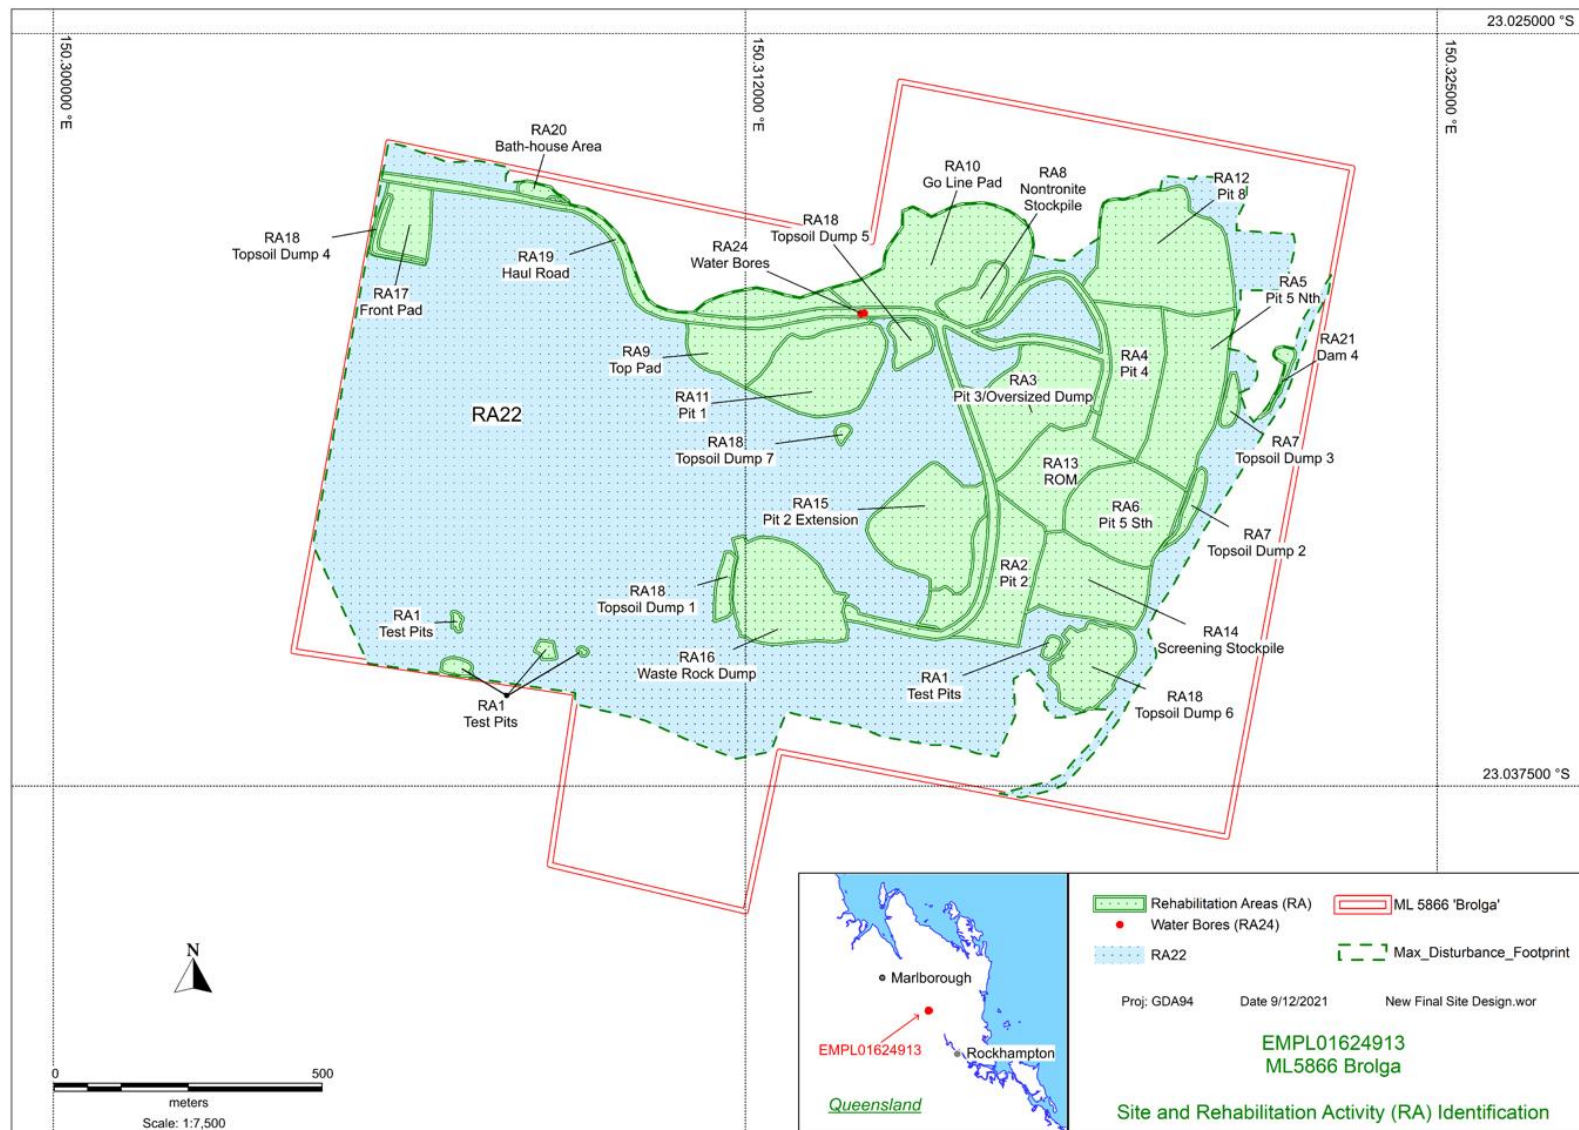


Figure 3 – Rehabilitation Areas Brolga

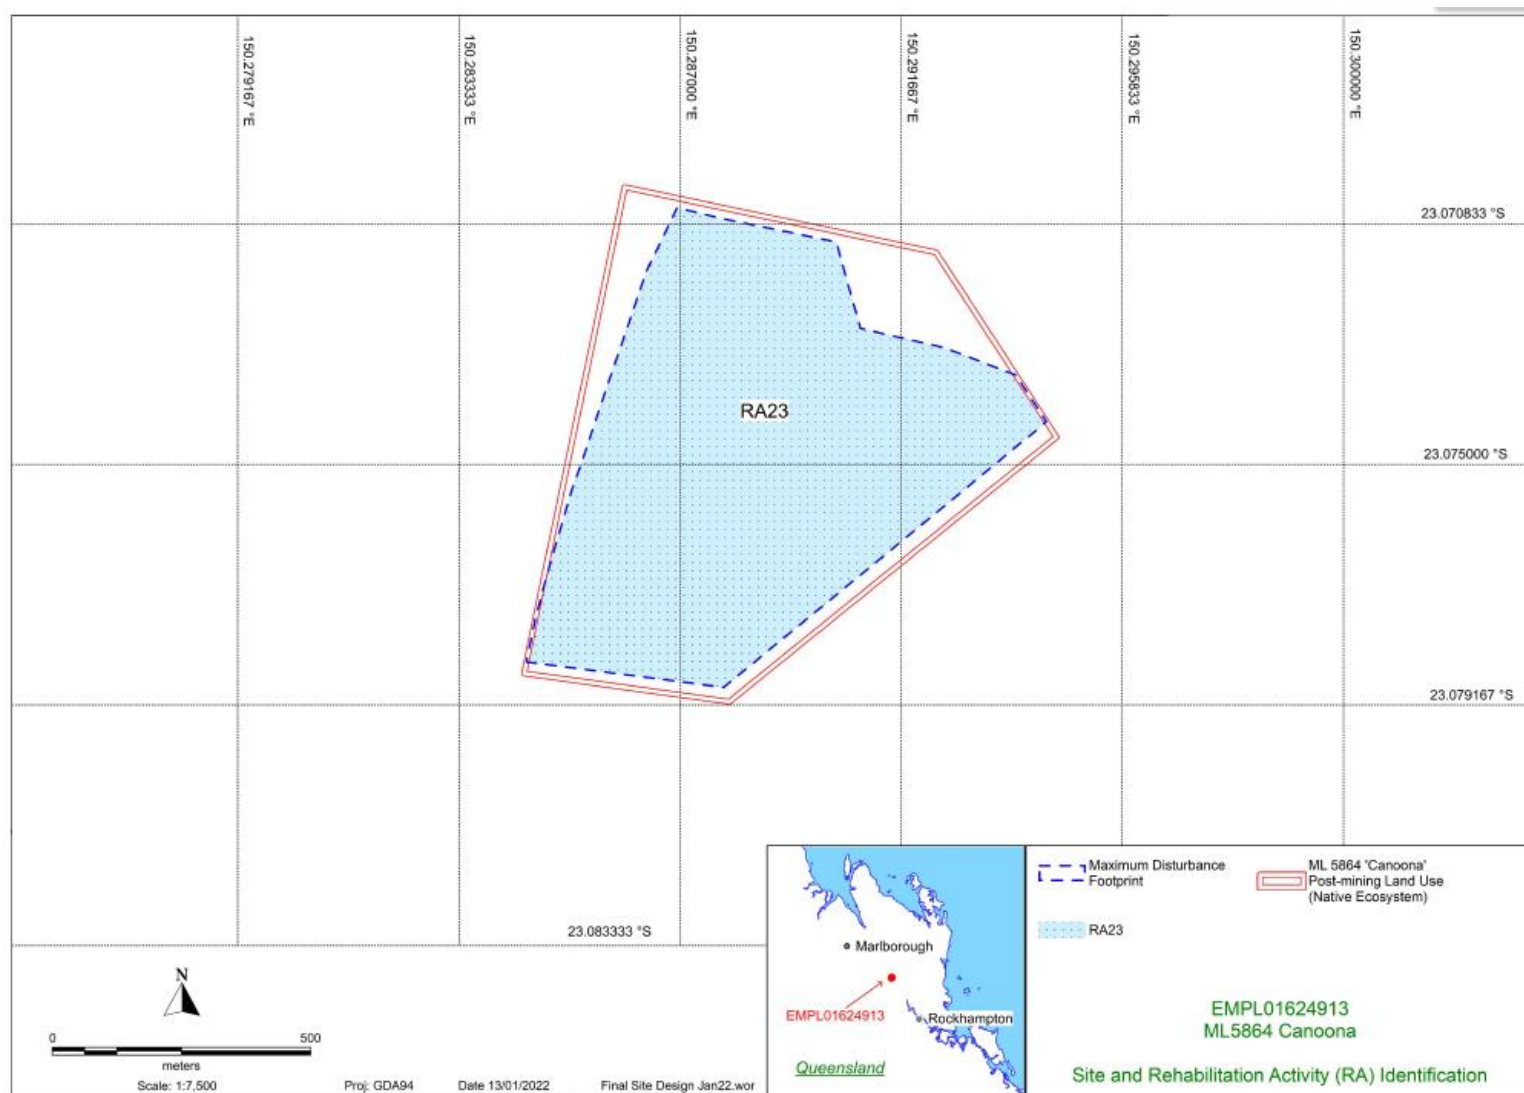


Figure 4 – Rehabilitation Areas Canoona

## Section C – Post mining land uses

### (RA1) Rehabilitation area 1

| Post-mining land uses (PMLU)         |                               |            |            |            |
|--------------------------------------|-------------------------------|------------|------------|------------|
| Rehabilitation area                  | RA1                           |            |            |            |
| Relevant activities                  | Test Pits                     |            |            |            |
| Total rehabilitation area size (ha)  | 0.45                          |            |            |            |
| Commencement of first milestone: RM1 | 1/02/2024                     |            |            |            |
| PMLU                                 | Low intensity grazing         |            |            |            |
| Date area is available               | 1/02/2024                     | 11/12/2024 | 11/12/2025 | 11/12/2026 |
| Cumulative area available (ha)       | 0.45                          | 0.45       | 0.45       | 0.45       |
| Milestone completed by               | 10/12/2024                    | 10/12/2025 | 10/12/2026 | 10/12/2029 |
| Milestone Reference                  | Cumulative area achieved (ha) |            |            |            |
| RM1                                  | 0.45                          |            |            |            |
| RM2                                  |                               | 0.45       |            |            |
| RM3                                  |                               | 0.45       |            |            |
| RM4                                  |                               | 0.45       |            |            |
| RM5                                  |                               |            | 0.45       |            |
| RM6                                  |                               |            |            | 0.45       |

**(RA2) Rehabilitation area 2**

| Post-mining land uses (PMLU)         |                               |            |            |            |
|--------------------------------------|-------------------------------|------------|------------|------------|
| Rehabilitation area                  | RA2                           |            |            |            |
| Relevant activities                  | Pit 2                         |            |            |            |
| Total rehabilitation area size (ha)  | 3.56                          |            |            |            |
| Commencement of first milestone: RM1 | 1/02/2024                     |            |            |            |
| PMLU                                 | Low intensity grazing         |            |            |            |
| Date area is available               | 1/02/2024                     | 11/12/2024 | 11/12/2025 | 11/12/2026 |
| Cumulative area available (ha)       | 3.56                          | 3.56       | 3.56       | 3.56       |
| Milestone completed by               | 10/12/2024                    | 10/12/2025 | 10/12/2026 | 10/12/2029 |
| Milestone Reference                  | Cumulative area achieved (ha) |            |            |            |
| RM1                                  | 3.56                          |            |            |            |
| RM2                                  |                               | 3.56       |            |            |
| RM3                                  |                               | 3.56       |            |            |
| RM4                                  |                               | 3.56       |            |            |
| RM5                                  |                               |            | 3.56       |            |
| RM6                                  |                               |            |            | 3.56       |

**(RA3) Rehabilitation area 3**

| Post-mining land uses (PMLU)         |                               |            |            |            |
|--------------------------------------|-------------------------------|------------|------------|------------|
| Rehabilitation area                  | RA3                           |            |            |            |
| Relevant activities                  | Pit 3/Oversized Dump          |            |            |            |
| Total rehabilitation area size (ha)  | 3.56                          |            |            |            |
| Commencement of first milestone: RM1 | 1/02/2024                     |            |            |            |
| PMLU                                 | Low intensity grazing         |            |            |            |
| Date area is available               | 1/02/2024                     | 11/12/2024 | 11/12/2025 | 11/12/2026 |
| Cumulative area available (ha)       | 3.56                          | 3.56       | 3.56       | 3.56       |
| Milestone completed by               | 10/12/2024                    | 10/12/2025 | 10/12/2026 | 10/12/2029 |
| Milestone Reference                  | Cumulative area achieved (ha) |            |            |            |
| RM1                                  | 3.56                          |            |            |            |
| RM2                                  |                               | 3.56       |            |            |
| RM3                                  |                               | 3.56       |            |            |
| RM4                                  |                               | 3.56       |            |            |
| RM5                                  |                               |            | 3.56       |            |
| RM6                                  |                               |            |            | 3.56       |

**(RA4) Rehabilitation area 4**

| Post-mining land uses (PMLU)         |                               |            |            |            |
|--------------------------------------|-------------------------------|------------|------------|------------|
| Rehabilitation area                  | RA4                           |            |            |            |
| Relevant activities                  | Pit 4                         |            |            |            |
| Total rehabilitation area size (ha)  | 2.73                          |            |            |            |
| Commencement of first milestone: RM1 | 1/02/2024                     |            |            |            |
| PMLU                                 | Low intensity grazing         |            |            |            |
| Date area is available               | 1/02/2024                     | 11/12/2024 | 11/12/2025 | 11/12/2026 |
| Cumulative area available (ha)       | 2.73                          | 2.73       | 2.73       | 2.73       |
| Milestone completed by               | 10/12/2024                    | 10/12/2025 | 10/12/2026 | 10/12/2029 |
| Milestone Reference                  | Cumulative area achieved (ha) |            |            |            |
| RM1                                  | 2.73                          |            |            |            |
| RM2                                  |                               | 2.73       |            |            |
| RM3                                  |                               | 2.73       |            |            |
| RM4                                  |                               | 2.73       |            |            |
| RM5                                  |                               |            | 2.73       |            |
| RM6                                  |                               |            |            | 2.73       |

**(RA5) Rehabilitation area 5**

| Post-mining land uses (PMLU)         |                               |            |            |            |
|--------------------------------------|-------------------------------|------------|------------|------------|
| Rehabilitation area                  | RA5                           |            |            |            |
| Relevant activities                  | Pit 5 Nth                     |            |            |            |
| Total rehabilitation area size (ha)  | 3.57                          |            |            |            |
| Commencement of first milestone: RM1 | 1/02/2024                     |            |            |            |
| PMLU                                 | Low intensity grazing         |            |            |            |
| Date area is available               | 1/02/2024                     | 11/12/2024 | 11/12/2025 | 11/12/2026 |
| Cumulative area available (ha)       | 3.57                          | 3.57       | 3.57       | 3.57       |
| Milestone completed by               | 10/12/2024                    | 10/12/2025 | 10/12/2026 | 10/12/2029 |
| Milestone Reference                  | Cumulative area achieved (ha) |            |            |            |
| RM1                                  | 3.57                          |            |            |            |
| RM2                                  |                               | 3.57       |            |            |
| RM3                                  |                               | 3.57       |            |            |
| RM4                                  |                               | 3.57       |            |            |
| RM5                                  |                               |            | 3.57       |            |
| RM6                                  |                               |            |            | 3.57       |

**(RA6) Rehabilitation area 6**

| Post-mining land uses (PMLU)         |                               |            |            |            |
|--------------------------------------|-------------------------------|------------|------------|------------|
| Rehabilitation area                  | RA6                           |            |            |            |
| Relevant activities                  | Pit 5 Sth                     |            |            |            |
| Total rehabilitation area size (ha)  | 3.06                          |            |            |            |
| Commencement of first milestone: RM1 | 1/02/2024                     |            |            |            |
| PMLU                                 | Low intensity grazing         |            |            |            |
| Date area is available               | 1/02/2024                     | 11/12/2024 | 11/12/2025 | 11/12/2026 |
| Cumulative area available (ha)       | 3.06                          | 3.06       | 3.06       | 3.06       |
| Milestone completed by               | 10/12/2024                    | 10/12/2025 | 10/12/2026 | 10/12/2029 |
| Milestone Reference                  | Cumulative area achieved (ha) |            |            |            |
| RM1                                  | 3.06                          |            |            |            |
| RM2                                  |                               | 3.06       |            |            |
| RM3                                  |                               | 3.06       |            |            |
| RM4                                  |                               | 3.06       |            |            |
| RM5                                  |                               |            | 3.06       |            |
| RM6                                  |                               |            |            | 3.06       |

**(RA7) Rehabilitation area 7**

| Post-mining land uses (PMLU)         |                                   |            |            |            |
|--------------------------------------|-----------------------------------|------------|------------|------------|
| Rehabilitation area                  | RA7                               |            |            |            |
| Relevant activities                  | Topsoil Dump 2 and Topsoil Dump 3 |            |            |            |
| Total rehabilitation area size (ha)  | 0.55                              |            |            |            |
| Commencement of first milestone: RM1 | 1/02/2024                         |            |            |            |
| PMLU                                 | Low intensity grazing             |            |            |            |
| Date area is available               | 1/02/2024                         | 11/12/2024 | 11/12/2025 | 11/12/2026 |
| Cumulative area available (ha)       | 0.55                              | 0.55       | 0.55       | 0.55       |
| Milestone completed by               | 10/12/2024                        | 10/12/2025 | 10/12/2026 | 10/12/2029 |
| Milestone Reference                  | Cumulative area achieved (ha)     |            |            |            |
| RM1                                  | 0.55                              |            |            |            |
| RM2                                  |                                   | 0.55       |            |            |
| RM3                                  |                                   | 0.55       |            |            |
| RM4                                  |                                   | 0.55       |            |            |
| RM5                                  |                                   |            | 0.55       |            |
| RM6                                  |                                   |            |            | 0.55       |

**(RA8) Rehabilitation area 8**

| Post-mining land uses (PMLU)         |                               |            |            |            |            |
|--------------------------------------|-------------------------------|------------|------------|------------|------------|
| Rehabilitation area                  | RA8                           |            |            |            |            |
| Relevant activities                  | Nontronite Stockpile          |            |            |            |            |
| Total rehabilitation area size (ha)  | 0.82                          |            |            |            |            |
| Commencement of first milestone: RM1 | 1/05/2024                     |            |            |            |            |
| PMLU                                 | Low intensity grazing         |            |            |            |            |
| Date area is available               | 1/05/2024                     | 1/05/2025  | 1/04/2027  | 11/12/2027 | 11/12/2028 |
| Cumulative area available (ha)       | 0.82                          | 0.82       | 0.82       | 0.82       | 0.82       |
| Milestone completed by               | 10/12/2024                    | 10/12/2026 | 10/12/2027 | 10/12/2028 | 10/12/2031 |
| Milestone Reference                  | Cumulative area achieved (ha) |            |            |            |            |
| RM1                                  | 0.82                          |            |            |            |            |
| RM2                                  |                               | 0.82       |            |            |            |
| RM3                                  |                               |            | 0.82       |            |            |
| RM4                                  |                               |            | 0.82       |            |            |
| RM5                                  |                               |            |            | 0.82       |            |
| RM6                                  |                               |            |            |            | 0.82       |

**(RA9) Rehabilitation area 9**

| Post-mining land uses (PMLU)         |                               |            |            |            |
|--------------------------------------|-------------------------------|------------|------------|------------|
| Rehabilitation area                  | RA9                           |            |            |            |
| Relevant activities                  | Top Pad                       |            |            |            |
| Total rehabilitation area size (ha)  | 2.84                          |            |            |            |
| Commencement of first milestone: RM1 | 1/05/2024                     |            |            |            |
| PMLU                                 | Low intensity grazing         |            |            |            |
| Date area is available               | 1/05/2024                     | 1/03/2027  | 11/12/2027 | 11/12/2028 |
| Cumulative area available (ha)       | 2.84                          | 2.84       | 2.84       | 2.84       |
| Milestone completed by               | 10/12/2024                    | 10/12/2027 | 10/12/2028 | 10/12/2031 |
| Milestone Reference                  | Cumulative area achieved (ha) |            |            |            |
| RM1                                  | 2.84                          |            |            |            |
| RM2                                  |                               | 2.84       |            |            |
| RM3                                  |                               | 2.84       |            |            |
| RM4                                  |                               | 2.84       |            |            |
| RM5                                  |                               |            | 2.84       |            |
| RM6                                  |                               |            |            | 2.84       |

**(RA10) Rehabilitation area 10**

| Post-mining land uses (PMLU)         |                               |            |            |            |            |
|--------------------------------------|-------------------------------|------------|------------|------------|------------|
| Rehabilitation area                  | RA10                          |            |            |            |            |
| Relevant activities                  | Go Line Pad                   |            |            |            |            |
| Total rehabilitation area size (ha)  | 4.45                          |            |            |            |            |
| Commencement of first milestone: RM1 | 1/05/2024                     |            |            |            |            |
| PMLU                                 | Low intensity grazing         |            |            |            |            |
| Date area is available               | 1/05/2024                     | 1/05/2025  | 1/04/2027  | 11/12/2027 | 11/12/2028 |
| Cumulative area available (ha)       | 4.45                          | 4.45       | 4.45       | 4.45       | 4.45       |
| Milestone completed by               | 10/12/2024                    | 10/12/2026 | 10/12/2027 | 10/12/2028 | 10/12/2031 |
| Milestone Reference                  | Cumulative area achieved (ha) |            |            |            |            |
| RM1                                  | 4.45                          |            |            |            |            |
| RM2                                  |                               | 4.45       |            |            |            |
| RM3                                  |                               |            | 4.45       |            |            |
| RM4                                  |                               |            | 4.45       |            |            |
| RM5                                  |                               |            |            | 4.45       |            |
| RM6                                  |                               |            |            |            | 4.45       |

**(RA11) Rehabilitation area 11**

| Post-mining land uses (PMLU)         |                               |            |            |            |            |
|--------------------------------------|-------------------------------|------------|------------|------------|------------|
| Rehabilitation area                  | RA11                          |            |            |            |            |
| Relevant activities                  | Pit 1                         |            |            |            |            |
| Total rehabilitation area size (ha)  | 2.98                          |            |            |            |            |
| Commencement of first milestone: RM1 | 1/05/2024                     |            |            |            |            |
| PMLU                                 | Low intensity grazing         |            |            |            |            |
| Date area is available               | 1/05/2024                     | 1/05/2028  | 1/09/2029  | 11/12/2029 | 11/12/2030 |
| Cumulative area available (ha)       | 2.98                          | 2.98       | 2.98       | 2.98       | 2.98       |
| Milestone completed by               | 10/12/2024                    | 10/12/2028 | 10/12/2029 | 10/12/2030 | 10/12/2033 |
| Milestone Reference                  | Cumulative area achieved (ha) |            |            |            |            |
| RM1                                  | 2.98                          |            |            |            |            |
| RM2                                  |                               | 2.98       |            |            |            |
| RM3                                  |                               | 2.98       |            |            |            |
| RM4                                  |                               |            | 2.98       |            |            |
| RM5                                  |                               |            |            | 2.98       |            |
| RM6                                  |                               |            |            |            | 2.98       |

**(RA12) Rehabilitation area 12**

| Post-mining land uses (PMLU)         |                               |            |            |            |            |
|--------------------------------------|-------------------------------|------------|------------|------------|------------|
| Rehabilitation area                  | RA12                          |            |            |            |            |
| Relevant activities                  | Pit 8                         |            |            |            |            |
| Total rehabilitation area size (ha)  | 4.92                          |            |            |            |            |
| Commencement of first milestone: RM1 | 1/05/2024                     |            |            |            |            |
| PMLU                                 | Low intensity grazing         |            |            |            |            |
| Date area is available               | 1/05/2024                     | 1/05/2028  | 1/09/2029  | 11/12/2029 | 11/12/2030 |
| Cumulative area available (ha)       | 4.92                          | 4.92       | 4.92       | 4.92       | 4.92       |
| Milestone completed by               | 10/12/2024                    | 10/12/2028 | 10/12/2029 | 10/12/2030 | 10/12/2033 |
| Milestone Reference                  | Cumulative area achieved (ha) |            |            |            |            |
| RM1                                  | 4.92                          |            |            |            |            |
| RM2                                  |                               | 4.92       |            |            |            |
| RM3                                  |                               | 4.92       |            |            |            |
| RM4                                  |                               |            | 4.92       |            |            |
| RM5                                  |                               |            |            | 4.92       |            |
| RM6                                  |                               |            |            |            | 4.92       |

**(RA13) Rehabilitation area 13**

| Post-mining land uses (PMLU)         |                               |            |            |            |            |
|--------------------------------------|-------------------------------|------------|------------|------------|------------|
| Rehabilitation area                  | RA13                          |            |            |            |            |
| Relevant activities                  | ROM                           |            |            |            |            |
| Total rehabilitation area size (ha)  | 2.43                          |            |            |            |            |
| Commencement of first milestone: RM1 | 1/05/2024                     |            |            |            |            |
| PMLU                                 | Low intensity grazing         |            |            |            |            |
| Date area is available               | 1/05/2024                     | 1/05/2028  | 1/09/2029  | 11/12/2029 | 11/12/2030 |
| Cumulative area available (ha)       | 2.43                          | 2.43       | 2.43       | 2.43       | 2.43       |
| Milestone completed by               | 10/12/2024                    | 10/12/2028 | 10/12/2029 | 10/12/2030 | 10/12/2033 |
| Milestone Reference                  | Cumulative area achieved (ha) |            |            |            |            |
| RM1                                  | 2.43                          |            |            |            |            |
| RM2                                  |                               | 2.43       |            |            |            |
| RM3                                  |                               | 2.43       |            |            |            |
| RM4                                  |                               |            | 2.43       |            |            |
| RM5                                  |                               |            |            | 2.43       |            |
| RM6                                  |                               |            |            |            | 2.43       |

**(RA14) Rehabilitation area 14**

| Post-mining land uses (PMLU)         |                               |            |            |            |            |
|--------------------------------------|-------------------------------|------------|------------|------------|------------|
| Rehabilitation area                  | RA14                          |            |            |            |            |
| Relevant activities                  | Screening Stockpile           |            |            |            |            |
| Total rehabilitation area size (ha)  | 2.66                          |            |            |            |            |
| Commencement of first milestone: RM1 | 1/05/2024                     |            |            |            |            |
| PMLU                                 | Low intensity grazing         |            |            |            |            |
| Date area is available               | 1/05/2024                     | 1/05/2028  | 1/09/2029  | 11/12/2029 | 11/12/2030 |
| Cumulative area available (ha)       | 2.66                          | 2.66       | 2.66       | 2.66       | 2.66       |
| Milestone completed by               | 10/12/2024                    | 10/12/2028 | 10/12/2029 | 10/12/2030 | 10/12/2033 |
| Milestone Reference                  | Cumulative area achieved (ha) |            |            |            |            |
| RM1                                  | 2.66                          |            |            |            |            |
| RM2                                  |                               | 2.66       |            |            |            |
| RM3                                  |                               | 2.66       |            |            |            |
| RM4                                  |                               |            | 2.66       |            |            |
| RM5                                  |                               |            |            | 2.66       |            |
| RM6                                  |                               |            |            |            | 2.66       |

**(RA15) Rehabilitation area 15**

| Post-mining land uses (PMLU)         |                               |            |            |            |            |
|--------------------------------------|-------------------------------|------------|------------|------------|------------|
| Rehabilitation area                  | RA15                          |            |            |            |            |
| Relevant activities                  | Pit 2 Extension               |            |            |            |            |
| Total rehabilitation area size (ha)  | 3.36                          |            |            |            |            |
| Commencement of first milestone: RM1 | 1/05/2024                     |            |            |            |            |
| PMLU                                 | Low intensity grazing         |            |            |            |            |
| Date area is available               | 1/05/2024                     | 1/05/2028  | 1/09/2029  | 11/12/2029 | 11/12/2030 |
| Cumulative area available (ha)       | 3.36                          | 3.36       | 3.36       | 3.36       | 3.36       |
| Milestone completed by               | 10/12/2024                    | 10/12/2028 | 10/12/2029 | 10/12/2030 | 10/12/2033 |
| Milestone Reference                  | Cumulative area achieved (ha) |            |            |            |            |
| RM1                                  | 3.36                          |            |            |            |            |
| RM2                                  |                               | 3.36       |            |            |            |
| RM3                                  |                               | 3.36       |            |            |            |
| RM4                                  |                               |            | 3.36       |            |            |
| RM5                                  |                               |            |            | 3.36       |            |
| RM6                                  |                               |            |            |            | 3.36       |

**(RA16) Rehabilitation area 16**

| Post-mining land uses (PMLU)         |                               |            |            |            |            |
|--------------------------------------|-------------------------------|------------|------------|------------|------------|
| Rehabilitation area                  | RA16                          |            |            |            |            |
| Relevant activities                  | Waste Rock Dump               |            |            |            |            |
| Total rehabilitation area size (ha)  | 3.32                          |            |            |            |            |
| Commencement of first milestone: RM1 | 1/05/2024                     |            |            |            |            |
| PMLU                                 | Low intensity grazing         |            |            |            |            |
| Date area is available               | 1/05/2024                     | 1/05/2028  | 1/09/2029  | 11/12/2029 | 11/12/2030 |
| Cumulative area available (ha)       | 3.32                          | 3.32       | 3.32       | 3.32       | 3.32       |
| Milestone completed by               | 10/12/2024                    | 10/12/2028 | 10/12/2029 | 10/12/2030 | 10/12/2033 |
| Milestone Reference                  | Cumulative area achieved (ha) |            |            |            |            |
| RM1                                  | 3.32                          |            |            |            |            |
| RM2                                  |                               | 3.32       |            |            |            |
| RM3                                  |                               | 3.32       |            |            |            |
| RM4                                  |                               |            | 3.32       |            |            |
| RM5                                  |                               |            |            | 3.32       |            |
| RM6                                  |                               |            |            |            | 3.32       |

**(RA17) Rehabilitation area 17**

| Post-mining land uses (PMLU)         |                               |            |            |            |            |
|--------------------------------------|-------------------------------|------------|------------|------------|------------|
| Rehabilitation area                  | RA17                          |            |            |            |            |
| Relevant activities                  | Front Pad                     |            |            |            |            |
| Total rehabilitation area size (ha)  | 1.36                          |            |            |            |            |
| Commencement of first milestone: RM1 | 1/05/2024                     |            |            |            |            |
| PMLU                                 | Low intensity grazing         |            |            |            |            |
| Date area is available               | 1/05/2024                     | 1/05/2028  | 1/09/2029  | 11/12/2029 | 11/12/2030 |
| Cumulative area available (ha)       | 1.36                          | 1.36       | 1.36       | 1.36       | 1.36       |
| Milestone completed by               | 10/12/2024                    | 10/12/2028 | 10/12/2029 | 10/12/2030 | 10/12/2033 |
| Milestone Reference                  | Cumulative area achieved (ha) |            |            |            |            |
| RM1                                  | 1.36                          |            |            |            |            |
| RM2                                  |                               | 1.36       |            |            |            |
| RM3                                  |                               | 1.36       |            |            |            |
| RM4                                  |                               |            | 1.36       |            |            |
| RM5                                  |                               |            |            | 1.36       |            |
| RM6                                  |                               |            |            |            | 1.36       |

**(RA18) Rehabilitation area 18**

| Post-mining land uses (PMLU)         |                               |            |            |            |            |
|--------------------------------------|-------------------------------|------------|------------|------------|------------|
| Rehabilitation area                  | RA18                          |            |            |            |            |
| Relevant activities                  | Topsoil Dumps: 1, 4, 5, 6, 7  |            |            |            |            |
| Total rehabilitation area size (ha)  | 2.88                          |            |            |            |            |
| Commencement of first milestone: RM1 | 1/05/2024                     |            |            |            |            |
| PMLU                                 | Low intensity grazing         |            |            |            |            |
| Date area is available               | 1/05/2024                     | 1/05/2028  | 1/09/2029  | 11/12/2029 | 11/12/2030 |
| Cumulative area available (ha)       | 2.88                          | 2.88       | 2.88       | 2.88       | 2.88       |
| Milestone completed by               | 10/12/2024                    | 10/12/2028 | 10/12/2029 | 10/12/2030 | 10/12/2033 |
| Milestone Reference                  | Cumulative area achieved (ha) |            |            |            |            |
| RM1                                  | 2.88                          |            |            |            |            |
| RM2                                  |                               | 2.88       |            |            |            |
| RM3                                  |                               | 2.88       |            |            |            |
| RM4                                  |                               |            | 2.88       |            |            |
| RM5                                  |                               |            |            | 2.88       |            |
| RM6                                  |                               |            |            |            | 2.88       |

**(RA19) Rehabilitation area 19**

| Post-mining land uses (PMLU)         |                               |            |            |
|--------------------------------------|-------------------------------|------------|------------|
| Rehabilitation area                  | RA19                          |            |            |
| Relevant activities                  | Haul Road                     |            |            |
| Total rehabilitation area size (ha)  | 4.47                          |            |            |
| Commencement of first milestone: RM1 | 1/05/2024                     |            |            |
| PMLU                                 | Low intensity grazing         |            |            |
| Date area is available               | 1/05/2024                     | 1/05/2030  | 11/12/2030 |
| Cumulative area available (ha)       | 4.47                          | 4.47       | 4.47       |
| Milestone completed by               | 10/12/2024                    | 10/12/2030 | 10/12/2031 |
| Milestone Reference                  | Cumulative area achieved (ha) |            |            |
| RM1                                  | 4.47                          |            |            |
| RM2                                  |                               | 4.47       |            |
| RM3                                  |                               | 4.47       |            |
| RM6                                  |                               |            | 4.47       |

**(RA20) Rehabilitation area 20**

| Post-mining land uses (PMLU)         |                               |            |
|--------------------------------------|-------------------------------|------------|
| Rehabilitation area                  | RA20                          |            |
| Relevant activities                  | Bath-house Area               |            |
| Total rehabilitation area size (ha)  | 0.19                          |            |
| Commencement of first milestone: RM1 | 1/05/2024                     |            |
| PMLU                                 | Low intensity grazing         |            |
| Date area is available               | 1/05/2024                     | 1/05/2030  |
| Cumulative area available (ha)       | 0.19                          | 0.19       |
| Milestone completed by               | 10/12/2024                    | 10/12/2031 |
| Milestone Reference                  | Cumulative area achieved (ha) |            |
| RM1                                  | 0.19                          |            |
| RM6                                  |                               | 0.19       |

**(RA21) Rehabilitation area 21**

| Post-mining land uses (PMLU)         |                               |            |            |            |
|--------------------------------------|-------------------------------|------------|------------|------------|
| Rehabilitation area                  | RA21                          |            |            |            |
| Relevant activities                  | Dam 4                         |            |            |            |
| Total rehabilitation area size (ha)  | 0.17                          |            |            |            |
| Commencement of first milestone: RM1 | 1/05/2024                     |            |            |            |
| PMLU                                 | Low intensity grazing         |            |            |            |
| Date area is available               | 1/05/2024                     | 1/05/2028  | 11/12/2028 | 11/12/2029 |
| Cumulative area available (ha)       | 0.17                          | 0.17       | 0.17       | 0.17       |
| Milestone completed by               | 10/12/2024                    | 10/12/2028 | 10/12/2029 | 10/12/2032 |
| Milestone Reference                  | Cumulative area achieved (ha) |            |            |            |
| RM1                                  | 0.17                          |            |            |            |
| RM2                                  |                               | 0.17       |            |            |
| RM3                                  |                               | 0.17       |            |            |
| RM4                                  |                               | 0.17       |            |            |
| RM5                                  |                               |            | 0.17       |            |
| RM6                                  |                               |            |            | 0.17       |

**(RA22) Rehabilitation area 22**

| Post-mining land uses (PMLU)         |                               |            |            |
|--------------------------------------|-------------------------------|------------|------------|
| Rehabilitation area                  | RA22                          |            |            |
| Relevant activities                  | Brolga                        |            |            |
| Total rehabilitation area size (ha)  | 92.97                         |            |            |
| Commencement of first milestone: RM1 | 1/05/2024                     |            |            |
| PMLU                                 | Low intensity grazing         |            |            |
| Date area is available               | 1/05/2024                     | 11/12/2024 | 11/12/2025 |
| Cumulative area available (ha)       | 92.97                         | 92.97      | 92.97      |
| Milestone completed by               | 10/12/2024                    | 10/12/2025 | 10/12/2028 |
| Milestone Reference                  | Cumulative area achieved (ha) |            |            |
| RM1                                  | 92.97                         |            |            |
| RM5                                  |                               | 92.97      |            |
| RM6                                  |                               |            | 92.97      |

**(RA23) Rehabilitation area 23**

| Post-mining land uses (PMLU)         |                               |            |
|--------------------------------------|-------------------------------|------------|
| Rehabilitation area                  | RA23                          |            |
| Relevant activities                  | Canoona                       |            |
| Total rehabilitation area size (ha)  | 52.38                         |            |
| Commencement of first milestone: RM1 | 1/05/2024                     |            |
| PMLU                                 | Low intensity grazing         |            |
| Date area is available               | 1/05/2024                     | 11/12/2024 |
| Cumulative area available (ha)       | 52.38                         | 52.38      |
| Milestone completed by               | 10/12/2024                    | 10/12/2027 |
| Milestone Reference                  | Cumulative area achieved (ha) |            |
| RM1                                  | 52.38                         |            |
| RM6                                  |                               | 52.38      |

**(RA24) Rehabilitation area 24**

| Post-mining land uses (PMLU)         |                               |            |            |
|--------------------------------------|-------------------------------|------------|------------|
| Rehabilitation area                  | RA24                          |            |            |
| Relevant activities                  | Water Bores                   |            |            |
| Total rehabilitation area size (ha)  | 0.001                         |            |            |
| Commencement of first milestone: RM1 | 1/01/2029                     |            |            |
| PMLU                                 | Low intensity grazing         |            |            |
| Date area is available               | 1/01/2029                     | 11/12/2029 | 11/12/2030 |
| Cumulative area available (ha)       | 0.001                         | 0.001      | 0.001      |
| Milestone completed by               | 10/12/2029                    | 10/12/2030 | 10/12/2032 |
| Milestone Reference                  | Cumulative area achieved (ha) |            |            |
| RM1                                  | 0.001                         |            |            |
| RM4                                  | 0.001                         |            |            |
| RM5                                  |                               | 0.001      |            |
| RM6                                  |                               |            | 0.001      |

## Rehabilitation area milestones

| Milestone reference | Rehabilitation milestone                                                                          | Milestone criteria                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------------------|---------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>RM1</b>          | Infrastructure and equipment removed and area available for rehabilitation free from contaminants | 1. a) Confirmation all equipment and infrastructure not being retained for post-mine use has been removed<br>1. b) Contamination absent, remediated or suitably treated.<br>1. c) Contaminated land site investigation undertaken by an appropriately qualified person (1) indicates that no contamination unsuitable for the post-mining land use is occurring.<br>1. d) Sediment in water impoundments suitable to support long term water quality targets required to achieve the post mine land use.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>RM2</b>          | Re-shaping landform complete                                                                      | 2. a) Bulk earthworks completed to final landform design plans confirmed by appropriately qualified person <sup>(1)</sup><br>2. b) All voids backfilled and no impoundments remaining other than Pit 1, Pit 2 extension, Pit 8 and Dam 4.<br>2. c) Landform geotechnically stable confirmed by appropriately qualified person <sup>(1)</sup> i.e. geotechnical engineer: <ul style="list-style-type: none"> <li>i. All embankment slopes <math>\leq 15\%</math>, or otherwise certified as stable with <math>FoS \geq 1.5</math>; and</li> <li>ii. Compaction requirements of final design plan achieved</li> </ul> 2. d) Drainage system installed to allow natural non-erosive drainage on the site, and is stable confirmed by survey by appropriately qualified person <sup>(1)</sup> .<br>2. e) Drainage system installed to final landform design plans, confirmed by survey by appropriately qualified person <sup>(1)</sup> .<br>2. f) No active rill, gully or sheet erosion visible within the rehabilitation area<br>2. g) Safety fencing and signage is in place above all slopes determined to be a potential safety risk to humans or cattle by an appropriately qualified person <sup>(1)</sup> . |
| <b>RM3</b>          | Surface preparation completed                                                                     | 3. a) Confirmation suitable soil resources are available to complete surface capping and soil establishment.<br>3. b) Ripping to minimum 600-750mm at ripper spacing of approximately 1.2m across rehabilitation areas<br>3. c) Minimum 500mm subsoil across all rehabilitation areas<br>3. d) Minimum 100mm topsoil across all rehabilitation areas<br>3. e) Soil health and suitability assessment by appropriately qualified person(1) confirms topsoil is suitable for seeding and recommends amelioration / fertiliser requirements where necessary<br>3. f) Erosion controls in place to minimise erosion of sub- and topsoils<br>3. g) No active rill, gully or sheet erosion visible within the rehabilitation area<br>3. h) Groundwater quality shows no deterioration from baseline conditions (baseline established from monitoring data collected at bores BB1 and BB2).                                                                                                                                                                                                                                                                                                                             |

| Milestone reference | Rehabilitation milestone  | Milestone criteria                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RM4                 | Revegetation              | <p>4. a) Fertiliser at a rate of 100 kg/ha applied to pasture areas, or as otherwise recommended by the soil health and suitability assessment report (RM3e)</p> <p>4. b) Revegetation of pasture areas with pasture grasses including:</p> <ul style="list-style-type: none"> <li>i. <i>Chloris gayana</i> (Rhodes grass)</li> <li>ii. <i>Sorghum</i> sp.,</li> <li>iii. <i>Bothriochloa insculpta</i> (bisset bluegrass),</li> <li>iv. <i>Heteropogan contortus</i> (black speargrass), and</li> <li>v. <i>Themeda triandra</i> (native kangaroo grass)</li> </ul> <p>at a rate of 3 kg/ha with 1 kg/ha of <i>Seca</i> seed</p> <p>4. c) Revegetation of grazing areas may include other trees, shrubs and forbs at rates suitable to support the grazing outcome (provide shade and windbreaks) and provide avian habitat. Species used must include:</p> <ul style="list-style-type: none"> <li>i. <i>Stackhousia tryonii</i>,</li> <li>ii. <i>Acacia leptostachya</i>,</li> <li>iii. <i>Allocasuarina</i> species (e.g. <i>Allocasuarina cunninghamiana</i> and <i>A. torulosa</i>); or</li> <li>iv. <i>Corymbia xanthope</i>;</li> <li>v. <i>Eucalyptus fibrosa</i>; and</li> <li>vi. other native species from regional ecosystems in the surrounding area</li> </ul> <p>4. d) Timing of seeding to coincide with optimal soil and climatic conditions</p> <p>4. e) Seeds raked in to achieve optimal cover following broadcasting</p> <p>4. f) Application of mulch and fertiliser into the sparse woodland revegetation areas, at rates recommended at RM3 e).</p> <p>4. g) No active rill, gully or sheet erosion visible within the rehabilitation area</p> <p>4. h) Firebreaks maintained until rehabilitation is complete</p> <p>4. i) Weed presence is at a maximum of 10% of groundcover</p> |
| RM5                 | Vegetation is established | <p>5. a) Vegetation cover to exceed 50% in pasture areas</p> <p>5. b) Stem density to exceed the 50th percentile of reference sites for target species in pasture areas</p> <p>5. c) Forest areas and sparse woodland areas contain seedlings or suckers (&lt;2m in height) of target woody species at rate exceeding 50th percentile of reference sites</p> <p>5. d) Weed presence is at a maximum of 10% of groundcover</p> <p>5. e) No presence of giant ratstail grass or lantana</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

| Milestone reference | Rehabilitation milestone            | Milestone criteria                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------|-------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                     |                                     | 5. f) No exposed topsoil with less than 5% ground cover without remedial seeding in any pasture area<br>5. g) No patches of bare exposed soil (<5% cover of organic litter) exceeding 25m <sup>2</sup> in any pasture area<br>5. h) No active rill, gully or sheet erosion visible within the rehabilitation area<br>5. i) Firebreaks maintained until rehabilitation is complete                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>RM6</b>          | Final sustainable landform achieved | 6. a) Assessment of carrying capacity by an appropriately qualified person <sup>(1)</sup> demonstrates a sustainable grazing outcome is achieved<br>6. b) Revegetation cover to exceed the 70th percentile among reference sites<br>6. c) Land suitability class to meet requirements for final land use of low intensity grazing (Class 4 or better) – at 3 years post revegetation<br>6. d) Surface water quality in impoundments meets the following water quality targets: <ul style="list-style-type: none"> <li>- pH 6.0– 9.0 pH units</li> <li>- Electrical Conductivity (EC) 5970 µS/cm</li> <li>- Sulfate as SO<sub>4</sub> 1000 mg/L</li> <li>- Fluoride 2mg/L</li> <li>- Total Arsenic 0.5 mg/L</li> <li>- Total Cadmium 0.01 mg/L</li> <li>- Total Chromium 1 mg/L</li> <li>- Total Cobalt 1 mg/L</li> <li>- Total Nickel 1 mg/L</li> </ul> 6. e) Groundwater quality shows no deterioration, compared to baseline data – at 3 years post revegetation (baseline established from monitoring data collected at bores BB1 and BB2).<br>6. f) No active rill, gully or sheet erosion visible within the rehabilitation area, and all rill or gully erosive features rectified – at 3 years post revegetation<br>6. g) Drainage is following appropriate drainage paths and all drainage issues rectified - at 3 years post revegetation<br>6. h) Weed presence is at a maximum of 10% of groundcover<br>6. i) No presence of giant ratstail grass or lantana |

(1) Appropriately Qualified Person means a person who has professional qualifications, training, skills or experience relevant to the nominated subject matter and can give authoritative assessment, advice and analysis on performance relating to the subject matter using the relevant protocols, standards, methods or literature.

**END OF PRCP SCHEDULE**