

PRCP Schedule

Environmental Protection Act 1994

PRCP Schedule PRCP_EPML01624913_V1

This is the approved form for a PRCP schedule issued by the administering authority under Chapter 5 of the Environmental Protection Act 1994.

PRCP schedule: PRCP_EPML01624913_V1

PRCP schedule holder(s)

Name(s)	Registered address
QNI Resources Pty Ltd ACN: 054 117 921	1 Greenvale Street YABULU QLD 4818
QNI Metal Pty Ltd ACN: 066 656 175	

Location details

Location(s)
Mining Lease (ML) 5864, ML5866

Take effect

In accordance with section 202B of the *Environmental Protection Act 1994* (EP Act), the PRCP schedule has effect on the day the environmental authority for carrying out relevant activities on land to which the schedule relates takes effect. Pursuant to section 202C of the EP Act, a PRCP schedule continues in force until the environmental authority for the relevant activities to which the PRCP schedule relates is cancelled or surrendered, even if the resource tenure expires or is cancelled and even if the relevant environmental authority is suspended under Chapter 5, part 11 or 11A of the EP Act.



Signature

18/01/2023

Date

Chris Wake
Department of Environment and Science
Delegate of the administering authority
Environmental Protection Act 1994

Enquiries:
Mineral Business Centre
PO Box 7230, Cairns QLD 4870
Phone: (07) 4222 5352
Email: ESCairns@des.qld.gov.au

Obligations under the *Environmental Protection Act 1994*

Pursuant to section 202E of the EP Act, if there is an inconsistency between an environmental authority and a PRCP schedule, the environmental authority prevails to the extent of the inconsistency.

Pursuant to section 285 of the EP Act:

- the holder of a PRCP schedule must commission an audit of the schedule by a rehabilitation auditor for the following periods (each an audit period) —
 - (a) the 3-year period starting on the day the schedule takes effect
 - (b) each 3-year period starting on the day after the previous audit period ended.
- the holder must, within 4 months after the end of each audit period, give the administering authority -
 - (a) the rehabilitation auditor's report (an audit report) about the audit that complies with section 286 of the EP Act, and
 - (b) a declaration for the audit report that complies with section 285 of the EP Act.

In addition to the requirements found in the conditions of this PRCP schedule, the holder must also meet their obligations under the environmental authority, the EP Act, and the regulations made under the EP Act. For example, the holder must comply with the following provisions of the EP Act:

- general environmental duty (section 319)
- duty to notify environmental harm (section 320-320G)
- offence of causing serious or material environmental harm (sections 437-439)
- offence of causing environmental nuisance (section 440)
- offence of depositing prescribed water contaminants in waters and related matters (section 440ZG)
- offence to place contaminant where environmental harm or nuisance may be caused (section 443).

PRCP schedule

The PRCP schedule incorporates the following sections:

- Section A - Conditions of PRCP schedule
- Section B - Final site design and reference maps
- Section C - Post mining land uses

Section A - Conditions of PRCP schedule

Pursuant to section 206A of the EP Act:

- it is a condition of this PRCP schedule that, in carrying out a relevant activity under the schedule, the holder must comply with a requirement stated in the environmental authority relevant to carrying out the activity.
- it is a condition of this PRCP schedule that the holder must comply with the following matters stated in the schedule -
 - (a) each rehabilitation milestone and management milestone
 - (b) when each rehabilitation milestone and management milestone is to be achieved

General conditions

PRCP1 The holder must comply with each milestone criteria stated in the schedule

PRCP2 Where a milestone criterion requires any of the following, the holder must keep records of the actions taken to comply with the criterion as well as the results and provide a copy of this information to the Administering Authority on request -

- (i) certifications or assessments to be undertaken;
- (ii) monitoring or maintenance to be carried out;
- (iii) final design plans and/or specifications to be developed; and
- (iv) reports such as contaminated land investigations, rehabilitation reports (including monitoring records), validation reports, Quality Assurance/Quality Control reports.

PRCP3 Where land becomes available for rehabilitation earlier than the nominated 'Date area is available', progressive rehabilitation for that land must commence as soon as practicable. Progressive rehabilitation commenced early under this condition must be carried out in accordance with the milestones and criteria in this schedule, except that each of the dates by which milestones are to be completed is brought forward by the same amount of time as the commencement was brought forward.

END OF CONDITIONS

Section B - Final site design and reference maps



Figure 1 – Final Site Design Brolga



Figure 2 – Final Site Design Canoona

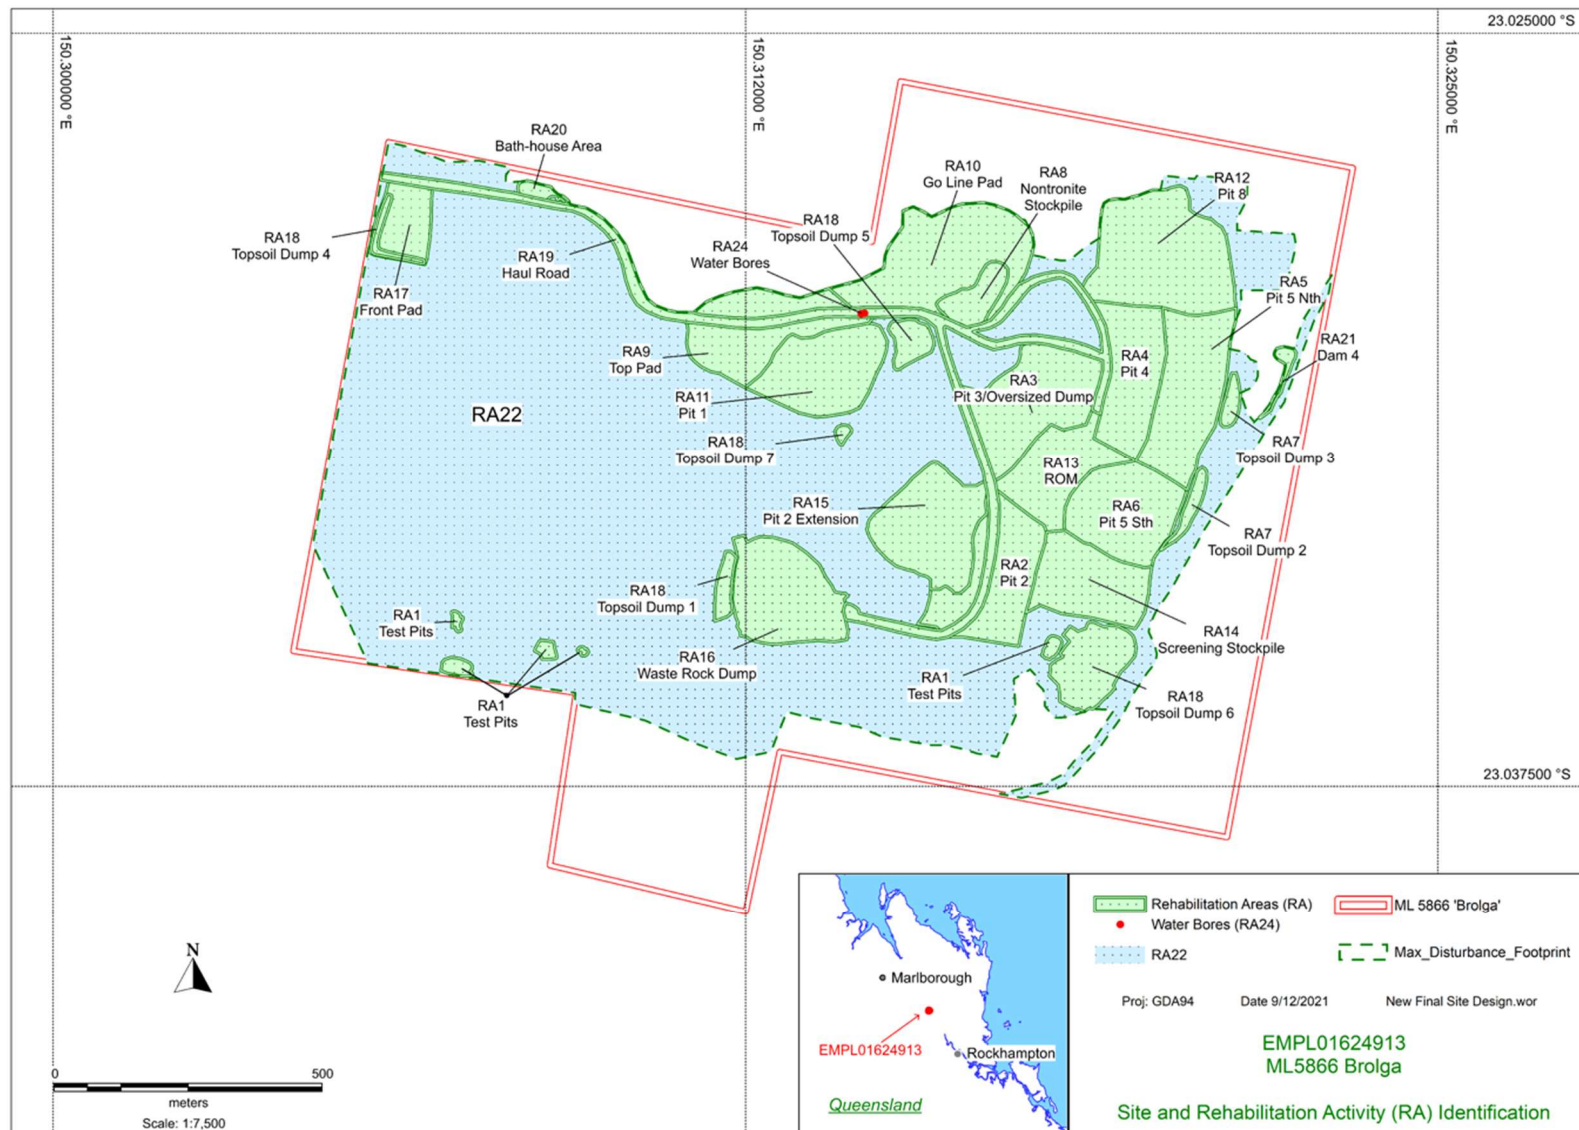


Figure 3 – Rehabilitation Areas Brolga

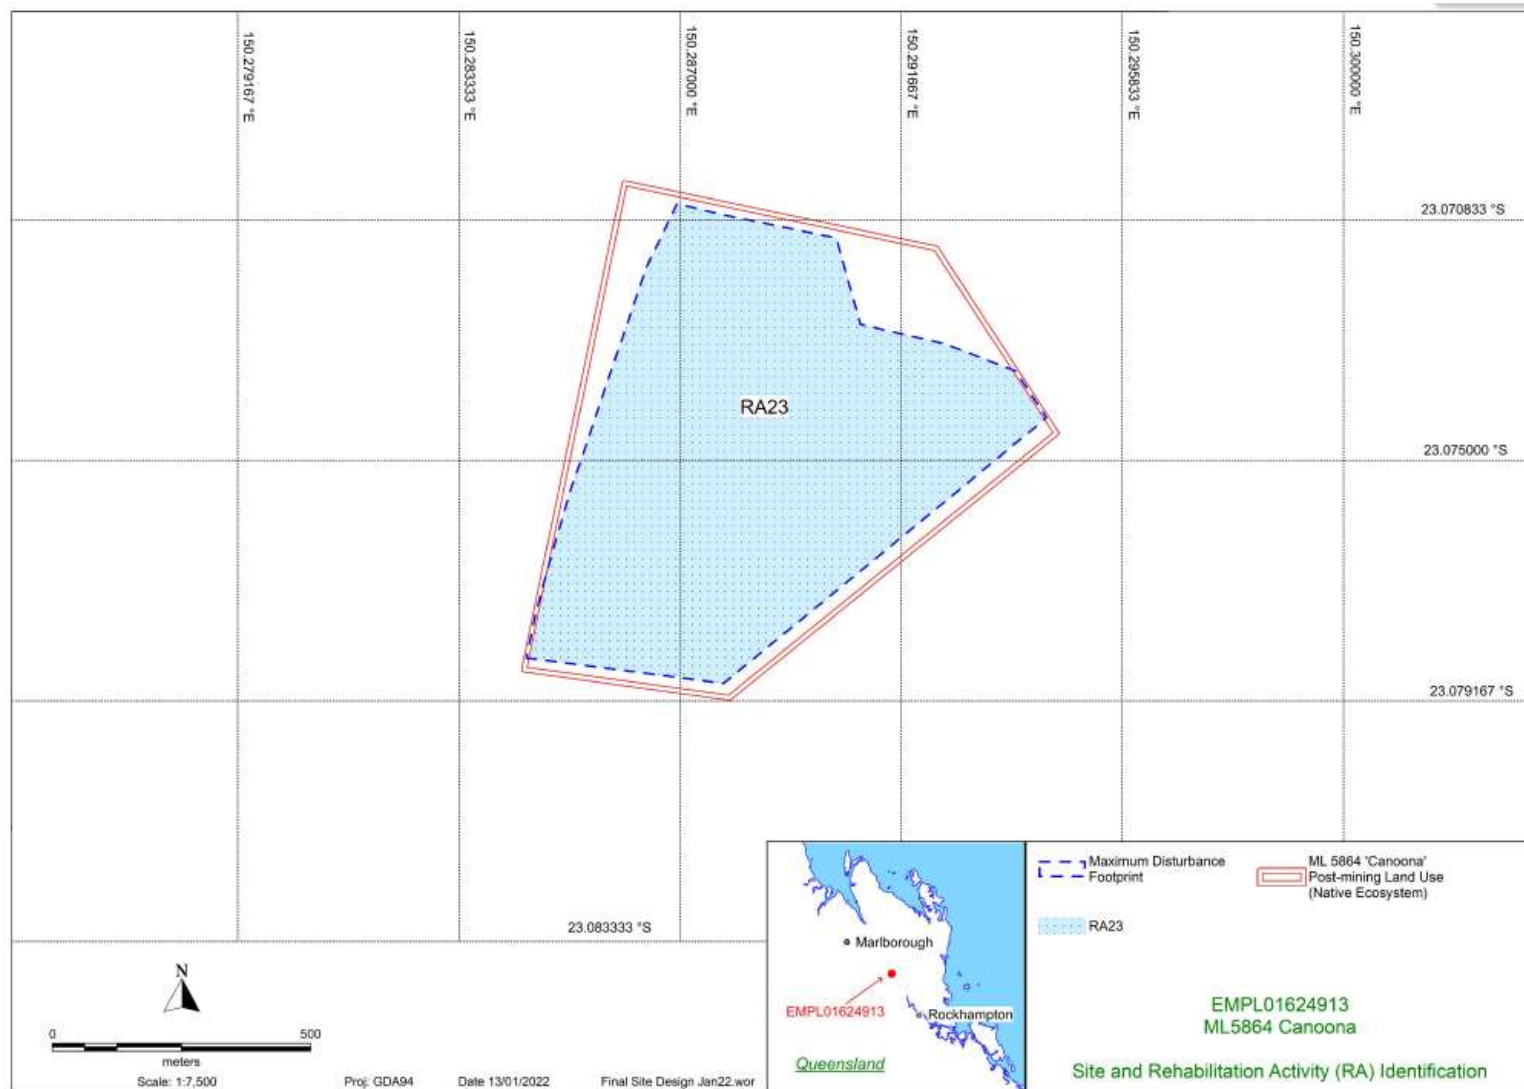


Figure 4 – Rehabilitation Areas Canoonah

Section C – Post mining land uses**(RA1) Rehabilitation area 1**

Post-mining land uses (PMLU)			
Rehabilitation area	RA1		
Relevant activities	Test Pits		
Total rehabilitation area size (ha)	0.45		
Commencement of first milestone: RM1	1/02/2024		
PMLU	Low intensity grazing		
Date area is available	1/02/2024	11/12/2024	11/12/2025
Cumulative area available (ha)	0.45	0.45	0.45
Milestone completed by	10/12/2024	10/12/2025	10/12/2028
Milestone Reference	Cumulative area achieved (ha)		
RM1	0.45		
RM2	0.45		
RM3	0.45		
RM4	0.45		
RM5		0.45	
RM6			0.45

(RA2) Rehabilitation area 2

Post-mining land uses (PMLU)				
Rehabilitation area	RA2			
Relevant activities	Pit 2			
Total rehabilitation area size (ha)	3.56			
Commencement of first milestone: RM1	1/02/2024			
PMLU	Low intensity grazing			
Date area is available	1/02/2024	1/05/2025	11/12/2025	11/12/2026
Cumulative area available (ha)	3.56	3.56	3.56	3.56
Milestone completed by	10/12/2024	10/12/2025	10/12/2026	10/12/2029
Milestone Reference	Cumulative area achieved (ha)			
RM1	3.56			
RM2	3.56			
RM3		3.56		
RM4		3.56		
RM5			3.56	
RM6				3.56

(RA3) Rehabilitation area 3

Post-mining land uses (PMLU)				
Rehabilitation area	RA3			
Relevant activities	Pit 3/Oversized Dump			
Total rehabilitation area size (ha)	3.56			
Commencement of first milestone: RM1	1/02/2024			
PMLU	Low intensity grazing			
Date area is available	1/02/2024	1/05/2025	11/12/2025	11/12/2026
Cumulative area available (ha)	3.56	3.56	3.56	3.56
Milestone completed by	10/12/2024	10/12/2025	10/12/2026	10/12/2029
Milestone Reference	Cumulative area achieved (ha)			
RM1	3.56			
RM2	3.56			
RM3		3.56		
RM4		3.56		
RM5			3.56	
RM6				3.56

(RA4) Rehabilitation area 4

Post-mining land uses (PMLU)				
Rehabilitation area	RA4			
Relevant activities	Pit 4			
Total rehabilitation area size (ha)	2.73			
Commencement of first milestone: RM1	1/02/2024			
PMLU	Low intensity grazing			
Date area is available	1/02/2024	1/05/2025	11/12/2025	11/12/2026
Cumulative area available (ha)	2.73	2.73	2.73	2.73
Milestone completed by	10/12/2024	10/12/2025	10/12/2026	10/12/2029
Milestone Reference	Cumulative area achieved (ha)			
RM1	2.73			
RM2	2.73			
RM3		2.73		
RM4		2.73		
RM5			2.73	
RM6				2.73

(RA5) Rehabilitation area 5

Post-mining land uses (PMLU)				
Rehabilitation area	RA5			
Relevant activities	Pit 5 Nth			
Total rehabilitation area size (ha)	3.57			
Commencement of first milestone: RM1	1/02/2024			
PMLU	Low intensity grazing			
Date area is available	1/02/2024	1/05/2025	11/12/2025	11/12/2026
Cumulative area available (ha)	3.57	3.57	3.57	3.57
Milestone completed by	10/12/2024	10/12/2025	10/12/2026	10/12/2029
Milestone Reference	Cumulative area achieved (ha)			
RM1	3.57			
RM2	3.57			
RM3		3.57		
RM4		3.57		
RM5			3.57	
RM6				3.57

(RA6) Rehabilitation area 6

Post-mining land uses (PMLU)				
Rehabilitation area	RA6			
Relevant activities	Pit 5 Sth			
Total rehabilitation area size (ha)	3.06			
Commencement of first milestone: RM1	1/02/2024			
PMLU	Low intensity grazing			
Date area is available	1/02/2024	1/05/2025	11/12/2025	11/12/2026
Cumulative area available (ha)	3.06	3.06	3.06	3.06
Milestone completed by	10/12/2024	10/12/2025	10/12/2026	10/12/2029
Milestone Reference	Cumulative area achieved (ha)			
RM1	3.06			
RM2	3.06			
RM3		3.06		
RM4		3.06		
RM5			3.06	
RM6				3.06

(RA7) Rehabilitation area 7

Post-mining land uses (PMLU)				
Rehabilitation area	RA7			
Relevant activities	Topsoil Dump 2 and Topsoil Dump 3			
Total rehabilitation area size (ha)	0.55			
Commencement of first milestone: RM1	1/02/2024			
PMLU	Low intensity grazing			
Date area is available	1/02/2024	1/05/2025	11/12/2025	11/12/2026
Cumulative area available (ha)	0.55	0.55	0.55	0.55
Milestone completed by	10/12/2024	10/12/2025	10/12/2026	10/12/2029
Milestone Reference	Cumulative area achieved (ha)			
RM1	0.55			
RM2	0.55			
RM3		0.55		
RM4		0.55		
RM5			0.55	
RM6				0.55

(RA8) Rehabilitation area 8

Post-mining land uses (PMLU)					
Rehabilitation area	RA8				
Relevant activities	Nontronite Stockpile				
Total rehabilitation area size (ha)	0.82				
Commencement of first milestone: RM1	1/05/2024				
PMLU	Low intensity grazing				
Date area is available	1/05/2024	1/05/2025	1/04/2027	11/12/2027	11/12/2028
Cumulative area available (ha)	0.82	0.82	0.82	0.82	0.82
Milestone completed by	10/12/2024	10/12/2026	10/12/2027	10/12/2028	10/12/2031
Milestone Reference	Cumulative area achieved (ha)				
RM1	0.82				
RM2		0.82			
RM3			0.82		
RM4			0.82		
RM5				0.82	
RM6					0.82

(RA9) Rehabilitation area 9

Post-mining land uses (PMLU)				
Rehabilitation area	RA9			
Relevant activities	Top Pad			
Total rehabilitation area size (ha)	2.84			
Commencement of first milestone: RM1	1/05/2024			
PMLU	Low intensity grazing			
Date area is available	1/05/2024	1/03/2027	11/12/2027	11/12/2028
Cumulative area available (ha)	2.84	2.84	2.84	2.84
Milestone completed by	10/12/2024	10/12/2027	10/12/2028	10/12/2031
Milestone Reference	Cumulative area achieved (ha)			
RM1	2.84			
RM2		2.84		
RM3		2.84		
RM4		2.84		
RM5			2.84	
RM6				2.84

(RA10) Rehabilitation area 10

Post-mining land uses (PMLU)					
Rehabilitation area	RA10				
Relevant activities	Go Line Pad				
Total rehabilitation area size (ha)	4.45				
Commencement of first milestone: RM1	1/05/2024				
PMLU	Low intensity grazing				
Date area is available	1/05/2024	1/05/2025	1/04/2027	11/12/2027	11/12/2028
Cumulative area available (ha)	4.45	4.45	4.45	4.45	4.45
Milestone completed by	10/12/2024	10/12/2026	10/12/2027	10/12/2028	10/12/2031
Milestone Reference	Cumulative area achieved (ha)				
RM1	4.45				
RM2		4.45			
RM3			4.45		
RM4			4.45		
RM5				4.45	
RM6					4.45

(RA11) Rehabilitation area 11

Post-mining land uses (PMLU)					
Rehabilitation area	RA11				
Relevant activities	Pit 1				
Total rehabilitation area size (ha)	2.98				
Commencement of first milestone: RM1	1/05/2024				
PMLU	Low intensity grazing				
Date area is available	1/05/2024	1/05/2028	1/09/2029	11/12/2029	11/12/2030
Cumulative area available (ha)	2.98	2.98	2.98	2.98	2.98
Milestone completed by	10/12/2024	10/12/2028	10/12/2029	10/12/2030	10/12/2033
Milestone Reference	Cumulative area achieved (ha)				
RM1	2.98				
RM2		2.98			
RM3		2.98			
RM4			2.98		
RM5				2.98	
RM6					2.98

(RA12) Rehabilitation area 12

Post-mining land uses (PMLU)					
Rehabilitation area	RA12				
Relevant activities	Pit 8				
Total rehabilitation area size (ha)	4.92				
Commencement of first milestone: RM1	1/05/2024				
PMLU	Low intensity grazing				
Date area is available	1/05/2024	1/05/2028	1/09/2029	11/12/2029	11/12/2030
Cumulative area available (ha)	4.92	4.92	4.92	4.92	4.92
Milestone completed by	10/12/2024	10/12/2028	10/12/2029	10/12/2030	10/12/2033
Milestone Reference	Cumulative area achieved (ha)				
RM1	4.92				
RM2		4.92			
RM3		4.92			
RM4			4.92		
RM5				4.92	
RM6					4.92

(RA13) Rehabilitation area 13

Post-mining land uses (PMLU)					
Rehabilitation area	RA13				
Relevant activities	ROM				
Total rehabilitation area size (ha)	2.43				
Commencement of first milestone: RM1	1/05/2024				
PMLU	Low intensity grazing				
Date area is available	1/05/2024	1/05/2028	1/09/2029	11/12/2029	11/12/2030
Cumulative area available (ha)	2.43	2.43	2.43	2.43	2.43
Milestone completed by	10/12/2024	10/12/2028	10/12/2029	10/12/2030	10/12/2033
Milestone Reference	Cumulative area achieved (ha)				
RM1	2.43				
RM2		2.43			
RM3		2.43			
RM4			2.43		
RM5				2.43	
RM6					2.43

(RA14) Rehabilitation area 14

Post-mining land uses (PMLU)					
Rehabilitation area	RA14				
Relevant activities	Screening Stockpile				
Total rehabilitation area size (ha)	2.66				
Commencement of first milestone: RM1	1/05/2024				
PMLU	Low intensity grazing				
Date area is available	1/05/2024	1/05/2028	1/09/2029	11/12/2029	11/12/2030
Cumulative area available (ha)	2.66	2.66	2.66	2.66	2.66
Milestone completed by	10/12/2024	10/12/2028	10/12/2029	10/12/2030	10/12/2033
Milestone Reference	Cumulative area achieved (ha)				
RM1	2.66				
RM2		2.66			
RM3		2.66			
RM4			2.66		
RM5				2.66	
RM6					2.66

(RA15) Rehabilitation area 15

Post-mining land uses (PMLU)					
Rehabilitation area	RA15				
Relevant activities	Pit 2 Extension				
Total rehabilitation area size (ha)	3.36				
Commencement of first milestone: RM1	1/05/2024				
PMLU	Low intensity grazing				
Date area is available	1/05/2024	1/05/2028	1/09/2029	11/12/2029	11/12/2030
Cumulative area available (ha)	3.36	3.36	3.36	3.36	3.36
Milestone completed by	10/12/2024	10/12/2028	10/12/2029	10/12/2030	10/12/2033
Milestone Reference	Cumulative area achieved (ha)				
RM1	3.36				
RM2		3.36			
RM3		3.36			
RM4			3.36		
RM5				3.36	
RM6					3.36

(RA16) Rehabilitation area 16

Post-mining land uses (PMLU)					
Rehabilitation area	RA16				
Relevant activities	Waste Rock Dump				
Total rehabilitation area size (ha)	3.32				
Commencement of first milestone: RM1	1/05/2024				
PMLU	Low intensity grazing				
Date area is available	1/05/2024	1/05/2028	1/09/2029	11/12/2029	11/12/2030
Cumulative area available (ha)	3.32	3.32	3.32	3.32	3.32
Milestone completed by	10/12/2024	10/12/2028	10/12/2029	10/12/2030	10/12/2033
Milestone Reference	Cumulative area achieved (ha)				
RM1	3.32				
RM2		3.32			
RM3		3.32			
RM4			3.32		
RM5				3.32	
RM6					3.32

(RA17) Rehabilitation area 17

Post-mining land uses (PMLU)					
Rehabilitation area	RA17				
Relevant activities	Front Pad				
Total rehabilitation area size (ha)	1.36				
Commencement of first milestone: RM1	1/05/2024				
PMLU	Low intensity grazing				
Date area is available	1/05/2024	1/05/2028	1/09/2029	11/12/2029	11/12/2030
Cumulative area available (ha)	1.36	1.36	1.36	1.36	1.36
Milestone completed by	10/12/2024	10/12/2028	10/12/2029	10/12/2030	10/12/2033
Milestone Reference	Cumulative area achieved (ha)				
RM1	1.36				
RM2		1.36			
RM3		1.36			
RM4			1.36		
RM5				1.36	
RM6					1.36

(RA18) Rehabilitation area 18

Post-mining land uses (PMLU)					
Rehabilitation area	RA18				
Relevant activities	Topsoil Dumps: 1, 4, 5, 6, 7				
Total rehabilitation area size (ha)	2.88				
Commencement of first milestone: RM1	1/05/2024				
PMLU	Low intensity grazing				
Date area is available	1/05/2024	1/05/2028	1/09/2029	11/12/2029	11/12/2030
Cumulative area available (ha)	2.88	2.88	2.88	2.88	2.88
Milestone completed by	10/12/2024	10/12/2028	10/12/2029	10/12/2030	10/12/2033
Milestone Reference	Cumulative area achieved (ha)				
RM1	2.88				
RM2		2.88			
RM3		2.88			
RM4			2.88		
RM5				2.88	
RM6					2.88

(RA19) Rehabilitation area 19

Post-mining land uses (PMLU)			
Rehabilitation area	RA19		
Relevant activities	Haul Road		
Total rehabilitation area size (ha)	4.47		
Commencement of first milestone: RM1	1/05/2024		
PMLU	Low intensity grazing		
Date area is available	1/05/2024	1/05/2030	11/12/2030
Cumulative area available (ha)	4.47	4.47	4.47
Milestone completed by	10/12/2024	10/12/2030	10/12/2031
Milestone Reference	Cumulative area achieved (ha)		
RM1	4.47		
RM2		4.47	
RM3		4.47	
RM6			4.47

(RA20) Rehabilitation area 20

Post-mining land uses (PMLU)		
Rehabilitation area	RA20	
Relevant activities	Bath-house Area	
Total rehabilitation area size (ha)	0.19	
Commencement of first milestone: RM1	1/05/2024	
PMLU	Low intensity grazing	
Date area is available	1/05/2024	1/05/2030
Cumulative area available (ha)	0.19	0.19
Milestone completed by	10/12/2024	10/12/2031
Milestone Reference	Cumulative area achieved (ha)	
RM1	0.19	
RM6		0.19

(RA21) Rehabilitation area 21

Post-mining land uses (PMLU)				
Rehabilitation area	RA21			
Relevant activities	Dam 4			
Total rehabilitation area size (ha)	0.17			
Commencement of first milestone: RM1	1/05/2024			
PMLU	Low intensity grazing			
Date area is available	1/05/2024	1/05/2028	11/12/2028	11/12/2029
Cumulative area available (ha)	0.17	0.17	0.17	0.17
Milestone completed by	10/12/2024	10/12/2028	10/12/2029	10/12/2032
Milestone Reference	Cumulative area achieved (ha)			
RM1	0.17			
RM2		0.17		
RM3		0.17		
RM4		0.17		
RM5			0.17	
RM6				0.17

(RA22) Rehabilitation area 22

Post-mining land uses (PMLU)			
Rehabilitation area	RA22		
Relevant activities	Brolga		
Total rehabilitation area size (ha)	92.97		
Commencement of first milestone: RM1	1/05/2024		
PMLU	Low intensity grazing		
Date area is available	1/05/2024	11/12/2024	11/12/2025
Cumulative area available (ha)	92.97	92.97	92.97
Milestone completed by	10/12/2024	10/12/2025	10/12/2028
Milestone Reference	Cumulative area achieved (ha)		
RM1	92.97		
RM5		92.97	
RM6			92.97

(RA23) Rehabilitation area 23

Post-mining land uses (PMLU)		
Rehabilitation area	RA23	
Relevant activities	Canoona	
Total rehabilitation area size (ha)	52.38	
Commencement of first milestone: RM1	1/05/2024	
PMLU	Low intensity grazing	
Date area is available	1/05/2024	11/12/2024
Cumulative area available (ha)	52.38	52.38
Milestone completed by	10/12/2024	10/12/2027
Milestone Reference	Cumulative area achieved (ha)	
RM1	52.38	
RM6		52.38

(RA24) Rehabilitation area 24

Post-mining land uses (PMLU)			
Rehabilitation area	RA24		
Relevant activities	Water Bores		
Total rehabilitation area size (ha)	0.001		
Commencement of first milestone: RM1	1/01/2029		
PMLU	Low intensity grazing		
Date area is available	1/01/2029	11/12/2029	11/12/2030
Cumulative area available (ha)	0.001	0.001	0.001
Milestone completed by	10/12/2029	10/12/2030	10/12/2032
Milestone Reference	Cumulative area achieved (ha)		
RM1	0.001		
RM4	0.001		
RM5		0.001	
RM6			0.001

Rehabilitation area milestones

Milestone reference	Rehabilitation milestone	Milestone criteria
RM1	Infrastructure and equipment removed and area available for rehabilitation free from contaminants	1. a) Confirmation all equipment and infrastructure not being retained for post-mine use has been removed 1. b) Contamination absent, remediated or suitably treated. 1. c) Contaminated land site investigation undertaken by an appropriately qualified person (1) indicates that no contamination unsuitable for the post-mining land use is occurring. 1. d) Sediment in water impoundments suitable to support long term water quality targets required to achieve the post mine land use.
RM2	Re-shaping landform complete	2. a) Bulk earthworks completed to final landform design plans confirmed by appropriately qualified person ⁽¹⁾ 2. b) All voids backfilled and no impoundments remaining other than Pit 1, Pit 2 extension, Pit 8 and Dam 4. 2. c) Landform geotechnically stable confirmed by appropriately qualified person ⁽¹⁾ i.e. geotechnical engineer: i. All embankment slopes $\leq 15\%$, or otherwise certified as stable with $FoS \geq 1.5$; and ii. Compaction requirements of final design plan achieved 2. d) Drainage system installed to allow natural non-erosive drainage on the site, and is stable confirmed by survey by appropriately qualified person ⁽¹⁾ . 2. e) Drainage system installed to final landform design plans, confirmed by survey by appropriately qualified person ⁽¹⁾ . 2. f) No active rill, gully or sheet erosion visible within the rehabilitation area 2. g) Safety fencing and signage is in place above all slopes determined to be a potential safety risk to humans or cattle by an appropriately qualified person ⁽¹⁾ .
RM3	Surface preparation completed	3. a) Confirmation suitable soil resources are available to complete surface capping and soil establishment. 3. b) Ripping to minimum 600-750mm at ripper spacing of approximately 1.2m across rehabilitation areas 3. c) Minimum 500mm subsoil across all rehabilitation areas 3. d) Minimum 100mm topsoil across all rehabilitation areas 3. e) Soil health and suitability assessment by appropriately qualified person(1) confirms topsoil is suitable for seeding and recommends amelioration / fertiliser requirements where necessary 3. f) Erosion controls in place to minimise erosion of sub- and topsoils 3. g) No active rill, gully or sheet erosion visible within the rehabilitation area 3. h) Groundwater quality shows no deterioration from baseline conditions (baseline established from monitoring data collected at bores BB1 and BB2).

Milestone reference	Rehabilitation milestone	Milestone criteria
RM4	Revegetation	4. a) Fertiliser at a rate of 100 kg/ha applied to pasture areas, or as otherwise recommended by the soil health and suitability assessment report (RM3e) 4. b) Revegetation of pasture areas with pasture grasses including: i. <i>Chloris gayana</i> (Rhodes grass) ii. <i>Sorghum</i> sp., iii. <i>Bothriochloa insculpta</i> (bisset bluegrass), iv. <i>Heteropogan contortus</i> (black speargrass), and v. <i>Themeda triandra</i> (native kangaroo grass) at a rate of 3 kg/ha with 1 kg/ha of <i>Seca</i> seed 4. c) Revegetation of grazing areas may include other trees, shrubs and forbs at rates suitable to support the grazing outcome (provide shade and windbreaks) and provide avian habitat. Species used must include: i. <i>Stackhousia tryonii</i>, ii. <i>Acacia leptostachya</i>, iii. <i>Allocasuarina</i> species (e.g. <i>Allocasuarina cunninghamiana</i> and <i>A. torulosa</i>); or iv. <i>Corymbia xanthope</i>; v. <i>Eucalyptus fibrosa</i>; and vi. other native species from regional ecosystems in the surrounding area 4. d) Timing of seeding to coincide with optimal soil and climatic conditions 4. e) Seeds raked in to achieve optimal cover following broadcasting 4. f) Application of mulch and fertiliser into the sparse woodland revegetation areas, at rates recommended at RM3 e). 4. g) No active rill, gully or sheet erosion visible within the rehabilitation area 4. h) Firebreaks maintained until rehabilitation is complete 4. i) Weed presence is at a maximum of 10% of groundcover
RM5	Vegetation is established	5. a) Vegetation cover to exceed 50% in pasture areas 5. b) Stem density to exceed the 50th percentile of reference sites for target species in pasture areas 5. c) Forest areas and sparse woodland areas contain seedlings or suckers (<2m in height) of target woody species at rate exceeding 50th percentile of reference sites 5. d) Weed presence is at a maximum of 10% of groundcover 5. e) No presence of giant ratstail grass or lantana

Milestone reference	Rehabilitation milestone	Milestone criteria
		5. f) No exposed topsoil with less than 5% ground cover without remedial seeding in any pasture area 5. g) No patches of bare exposed soil (<5% cover of organic litter) exceeding 25m ² in any pasture area 5. h) No active rill, gully or sheet erosion visible within the rehabilitation area 5. i) Firebreaks maintained until rehabilitation is complete
RM6	Final sustainable landform achieved	6. a) Assessment of carrying capacity by an appropriately qualified person ⁽¹⁾ demonstrates a sustainable grazing outcome is achieved 6. b) Revegetation cover to exceed the 70th percentile among reference sites 6. c) Land suitability class to meet requirements for final land use of low intensity grazing (Class 4 or better) – at 3 years post revegetation 6. d) Surface water quality in impoundments meets the following water quality targets: - pH 6.0– 9.0 pH units - Electrical Conductivity (EC) 5970 µS/cm - Sulfate as SO₄ 1000 mg/L - Fluoride 2mg/L - Total Arsenic 0.5 mg/L - Total Cadmium 0.01 mg/L - Total Chromium 1 mg/L - Total Cobalt 1 mg/L - Total Nickel 1 mg/L 6. e) Groundwater quality shows no deterioration, compared to baseline data – at 3 years post revegetation (baseline established from monitoring data collected at bores BB1 and BB2). 6. f) No active rill, gully or sheet erosion visible within the rehabilitation area, and all rill or gully erosive features rectified – at 3 years post revegetation 6. g) Drainage is following appropriate drainage paths and all drainage issues rectified - at 3 years post revegetation 6. h) Weed presence is at a maximum of 10% of groundcover 6. i) No presence of giant ratstail grass or lantana

(1) Appropriately Qualified Person means a person who has professional qualifications, training, skills or experience relevant to the nominated subject matter and can give authoritative assessment, advice and analysis on performance relating to the subject matter using the relevant protocols, standards, methods or literature.

END OF PRCP SCHEDULE