

Permit

Environmental Protection Act 1994

Environmental authority EPPR00779613

This environmental authority is issued by the administering authority under Chapter 5 of the Environmental Protection Act 1994.

Environmental authority number: EPPR00779613

Environmental authority takes effect on 16 January 2023.

Environmental authority holder

Name	Registered address
LMS ENERGY PTY LTD	79 King William Road UNLEY SA 5061

Environmentally relevant activity and location details

Environmentally relevant activities	Locations
ERA 15 - Fuel burning, Using fuel burning equipment that is capable of burning at least 500kg of fuel in an hour.	Lot 2/RP844932 Lot 104/RP839073 Lot 1/RP6936

Additional information for applicants

Environmentally relevant activities

The description of any environmentally relevant activity (ERA) for which an environmental authority (EA) is issued is a restatement of the ERA as defined by legislation at the time the EA is issued. Where there is any inconsistency between that description of an ERA and the conditions stated by an EA as to the scale, intensity or manner of carrying out an ERA, the conditions prevail to the extent of the inconsistency.

An EA authorises the carrying out of an ERA and does not authorise any environmental harm unless a condition stated by the EA specifically authorises environmental harm.

A person carrying out an ERA must also be a registered suitable operator under the *Environmental Protection Act 1994* (EP Act).

Contaminated land

It is a requirement of the EP Act that an owner or occupier of contaminated land give written notice to the administering authority if they become aware of the following:

- the happening of an event involving a hazardous contaminant on the contaminated land (notice must be given within 24 hours); or

- a change in the condition of the contaminated land (notice must be given within 24 hours); or
- a notifiable activity (as defined in Schedule 3) having been carried out, or is being carried out, on the contaminated land (notice must be given within 20 business days) that is causing, or is reasonably likely to cause, serious or material environmental harm.

For further information, including the form for giving written notice, refer to the Queensland Government website www.qld.gov.au, using the search term 'duty to notify'.

Take effect

Please note that, in accordance with section 200 of the EP Act, an EA has effect:


- a) if the authority is for a prescribed ERA and it states that it takes effect on the day nominated by the holder of the authority in a written notice given to the administering authority – on the nominated day; or
- b) if the authority states a day or an event for it to take effect – on the stated day or when the stated event happens; or
- c) otherwise – on the day the authority is issued.

However, if the EA is authorising an activity that requires an additional authorisation (a relevant tenure for a resource activity, a development permit under the *Planning Act 2016* or an SDA Approval under the *State Development and Public Works Organisation Act 1971*), this EA will not take effect until the additional authorisation has taken effect.

If this EA takes effect when the additional authorisation takes effect, you must provide the administering authority written notice within 5 business days of receiving notification of the related additional authorisation taking effect.

The anniversary day of this environmental authority is the same day each year as the effective date. The payment of the annual fee will be due each year on this day.

If you have incorrectly claimed that an additional authorisation is not required, carrying out the ERA without the additional authorisation is not legal and could result in your prosecution for providing false or misleading information or operating without a valid environmental authority.



Signature

Kate Grayson
Department of Environment, Science, and Innovation
Delegate of the administering authority
Environmental Protection Act 1994

9 January 2024

Date

Enquiries:
Energy and Extractive Resources
Department of Environment, Science, and Innovation
GPO Box 2454, BRISBANE QLD 4001
Phone: (07) 3330 5715
Email: EnergyandExtractive@des.qld.gov.au

Obligations under the *Environmental Protection Act 1994*

In addition to the requirements found in the conditions of this environmental authority, the holder must also meet their obligations under the EP Act, and the regulations made under the EP Act. For example, the holder must comply with the following provisions of the Act:

- general environmental duty (section 319)
- duty to notify environmental harm (section 320-320G)
- offence of causing serious or material environmental harm (sections 437-439)
- offence of causing environmental nuisance (section 440)
- offence of depositing prescribed water contaminants in waters and related matters (section 440ZG)
- offence to place contaminant where environmental harm or nuisance may be caused (section 443)

Development Approval

This permit is not a development approval under the *Planning Act 2016*. The conditions of this environmental authority are separate, and in addition to, any conditions that may be on the development approval. If a copy of this environmental authority is attached to a development approval, it is for information only, and may not be current. Please contact the Department of Environment and Science to ensure that you have the most current version of the environmental authority relating to this site.

Conditions of environmental authority

Part 1 – Common conditions relevant to all sites

Environmentally relevant activity	Locations
ERA 15 - Fuel burning, Using fuel burning equipment that is capable of burning at least 500kg of fuel in an hour.	174 Gardner Road ROCHEDALE (Lot 2/RP844932) 66-114 Blackheath Road, SWANBANK (Lot 104/RP839073) 32 Rossmans Road STAPYLTON (Lot 1/RP6936)

The environmentally relevant activity conducted at the locations above must be conducted in accordance with the following site-specific conditions of approval:

General	
Condition number	Condition
G1.	All reasonable and practicable measures must be taken to minimise the likelihood of environmental harm being caused.
G2.	Any breach of a condition of this environmental authority must be reported to the administering authority within 24 hours of becoming aware of the breach and record full details of the breach and any subsequent actions.
G3.	All records must be kept for a period of at least five years and provided to the administering authority upon request.
G4.	An appropriately qualified person(s) must monitor, interpret and record all parameters that are required to be monitored, in the manner provided.
G5.	All analysis and tests required under this approval must be carried out by a laboratory that has NATA certification for such analysis and tests. The only exception to this condition is for the-situ monitoring of: • Turbidity; • pH; and • Dissolved oxygen.
G6.	The activity must be undertaken in accordance with written procedures that: 1. identify potential risks to the environment from the activity during routine operations and emergencies; and 2. establish and maintain control measures that minimise the potential for environmental harm; and 3. ensure plant, equipment and measures are maintained in a proper and effective condition; and 4. ensure plant, equipment and measures are operated in a proper and effective manner; and 5. ensure that staff are trained and aware of their obligations under the <i>Environmental Protection Act 1994</i>.
G7.	All monitoring devices must be effectively calibrated and maintained.

G8.	If you become aware of any adverse impact on an environmental value, you must notify the administering authority in writing of the full details of the adverse impact within 24 hours of becoming aware of the impact.
G9.	You must record the following details for all environmental complaints received: 1. date and time complaint was received; 2. name and contact details of the complainant; 3. nature of the complaint; 4. investigations undertaken; 5. conclusions formed; and 6. actions taken.
Air	
Condition number	Condition
A1.	Odours or airborne contaminants which are noxious or offensive or otherwise unreasonably disruptive to public amenity or safety must not be released to any nuisance sensitive place or commercial place.
A2.	The only fuel permitted to be used is landfill gas (biogas).
A3.	The following associated monitoring requirements must be adhered to for all sites: 1. Air monitoring must be in accordance with the current edition of the administering authority's <i>Air Quality Sampling Manual</i>. 2. Monitoring must be undertaken any time the activity is in operation. 3. Monitoring must be taken when emissions are expected to be representative of actual operating conditions for the sample frequency period.
Water	
Condition number	Condition
WT1.	Other than as permitted within this authority, contaminants must not be released from the site to any waters or the bed and banks of any waters.
Land	
Condition number	Condition
L1.	Contaminants must not be released to land unless otherwise stated in this permit.
Waste	
Condition number	Condition
W1.	All waste generated in carrying out the activity must be lawfully reused, recycled or removed to a facility that can lawfully accept the waste.

Noise	
Condition number	Condition
N1.	Noise generated by the activity must not cause environmental nuisance to any sensitive place or commercial place.

Part 2 – Common conditions relevant to Rochedale site only

Environmentally relevant activity	Locations
ERA 15 - Fuel burning, Using fuel burning equipment that is capable of burning at least 500kg of fuel in an hour.	174 Gardner Road ROCHEDALE (Lot 2/RP844932)

In addition to Part 1, the environmentally relevant activities conducted at the locations above must be conducted in accordance with the following site-specific conditions of approval.

Condition number	Condition							
S1.	The release of contaminants to the atmosphere must only occur in accordance with the following table Rochedale – Air Contaminant Release Limits and Figure 1 : Drawing 40003-GA-008 Rev 0, dated 18/2/21.							
Rochedale - Air Contaminant Release Limits								
Monitoring Point (as shown in diagram 40003- GA-008 Rev 0, dated 18/2/21)	Minimum release height (metres)	Minimum velocity (m/sec)	Parameter	Maximum Limit		Reference Period	Monitoring Frequency	
GM1A	7.6	8	NO _x	500mg/m ³	0.85g/s	Hourly mean	At least one point is to be monitored and recorded each year. All release points are to be monitored at least once in a four- year period.	
			CO	1400mg/m ³	2.38g/s			
			Total VOCs	1000mg/m ³				
GM2A	7.6	8	NO _x	500mg/m ³	0.85g/s			
			CO	1400mg/m ³	2.38g/s			
			Total VOCs	1000mg/m ³				
GM3A	7.6	8	NO _x	500mg/m ³	0.85g/s			
			CO	1400mg/m ³	2.38g/s			
			Total VOCs	1000mg/m ³				
GM4A	7.6	8	NO _x	500mg/m ³	0.85g/s			
			CO	1400mg/m ³	2.38g/s			
			Total VOCs	1000mg/m ³				
GM5A	7.6	8	NO _x	500mg/m ³	0.85g/s			
			CO	1400mg/m ³	2.38g/s			
			Total VOCs	1000mg/m ³				
GM6A	7.6	8	NO _x	500mg/m ³	0.85g/s			
			CO	1400mg/m ³	2.38g/s			
			Total VOCs	1000mg/m ³				

	GM7A	7.6	8	NO _x	500mg/m ³	0.85g/s		
				CO	1400mg/m ³	2.38g/s		
				Total VOCs	1000mg/m ³			
S2.	The only contaminants to be released to waters are those from the Humeceptor, in accordance with Figure 2 : Drawing 40003-GA-009, Rev 0, dated 25/2/21.							
S3.	The release of contaminants from the Humeceptor system must be in accordance with the table Contaminant release limits to water and Figure 2 : Drawing 40003-GA-009, Rev 0, dated 25/2/21.							
Contaminant release limits to water								
Monitoring Point		Quality Characteristics		Release Limit		Monitoring Frequency		
Humeceptor discharge point (as identified in Figure 2 : Drawing 40003-GA-009, Rev 0, dated 25/2/21)		pH		6.5		8.5		Biannually (when releasing).
		Suspended solid		-		50 mg/L		
		Dissolved Oxygen		80 – 90%		Upper Limit		
		Oil & Grease		No visible film No detectable odour.		-		
		Floating matter		None visible		-		

Figure 1: Diagram 40003-GA-008 Rev 0, dated 18/2/21


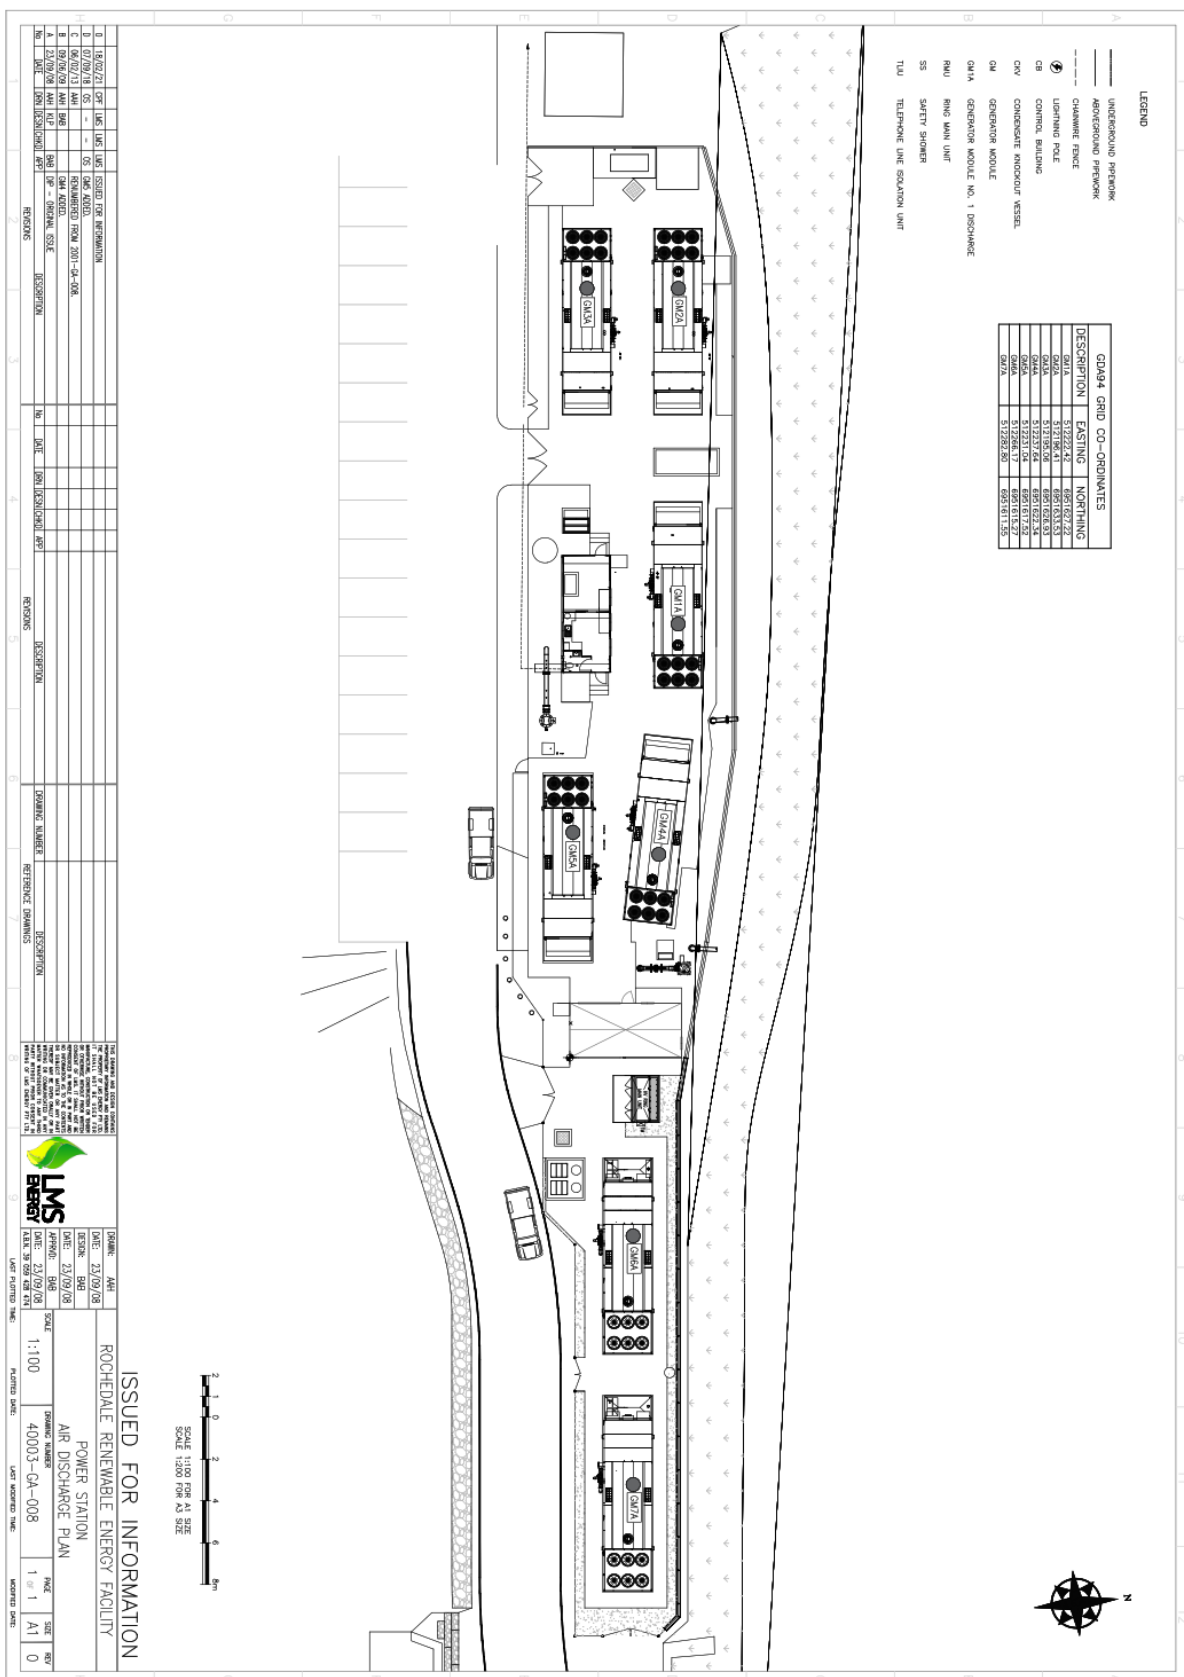


Figure 2: Drawing 40003-GA-009, Rev 0, dated 25/2/21

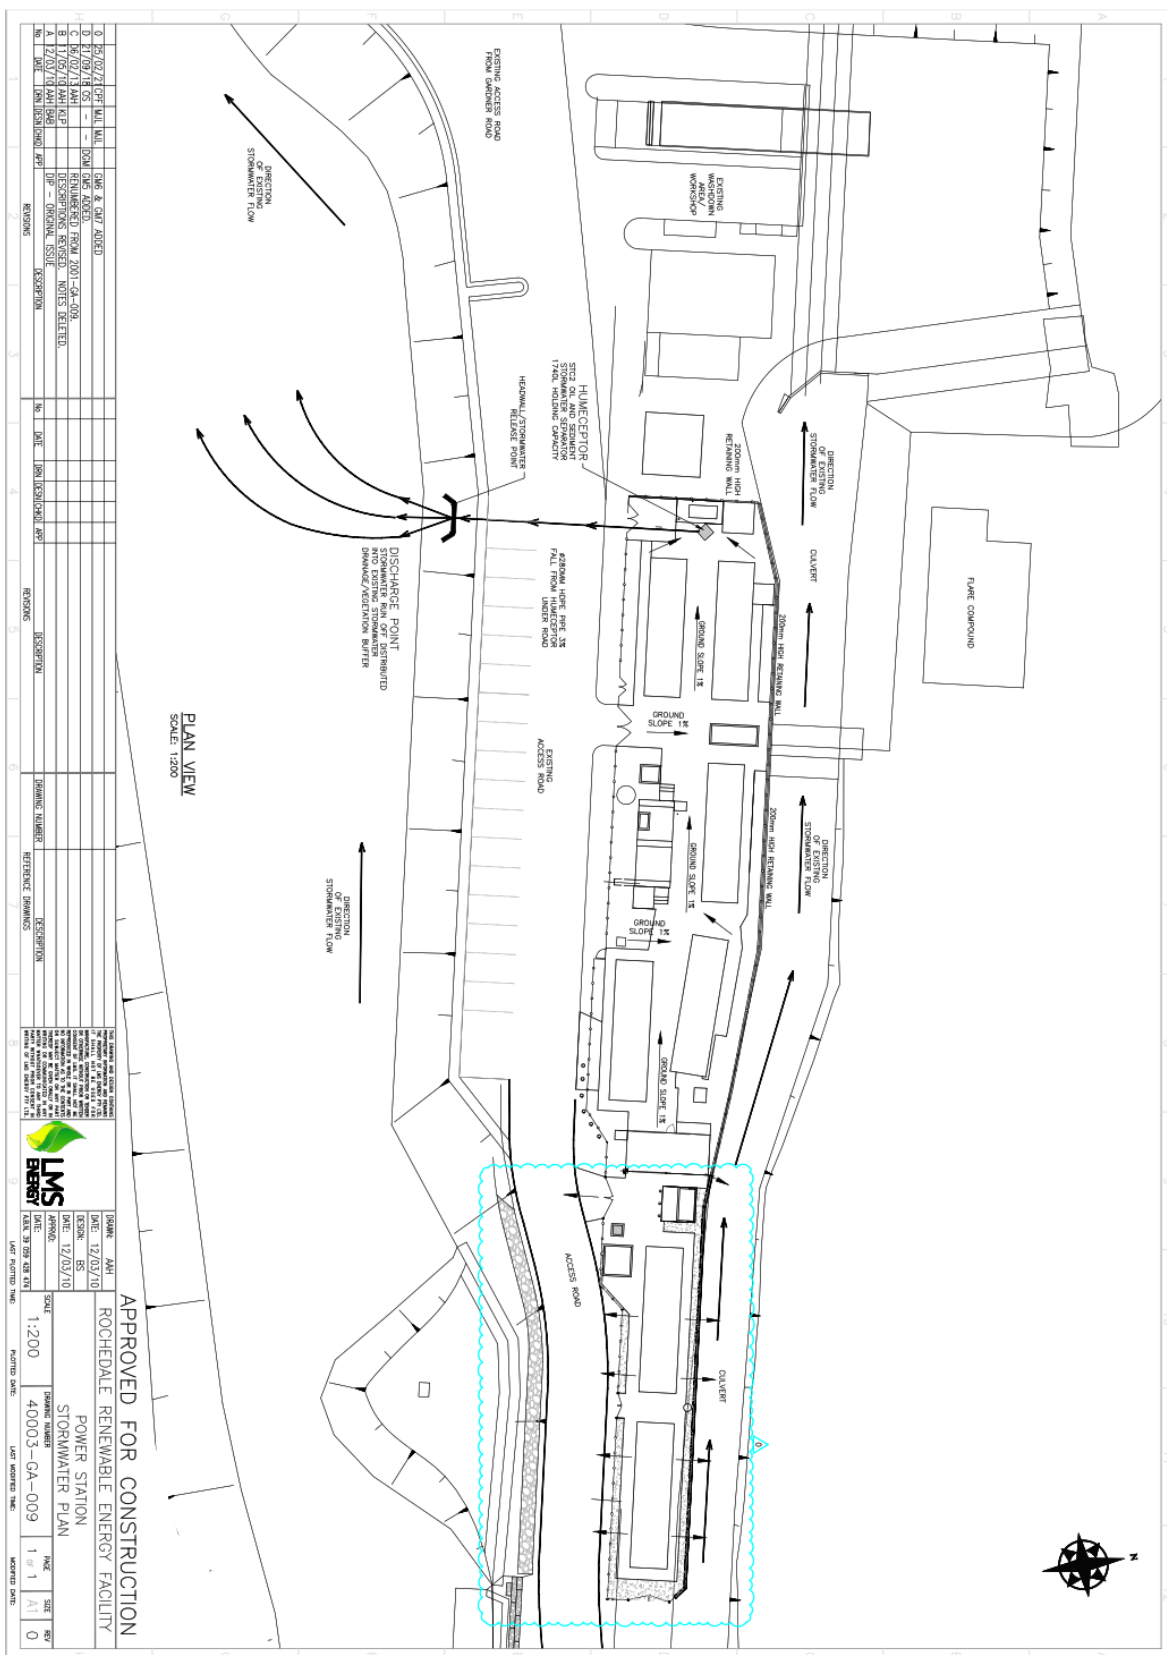

Part 3 – Conditions relevant to Swanbank site only

Environmentally relevant activity	Location
ERA 15 - Fuel burning, Using fuel burning equipment that is capable of burning at least 500kg of fuel in an hour	66-114 Blackheath Road, SWANBANK (Lot 104/RP839073)


In addition to Parts 1 and 2, the environmentally relevant activities conducted at the location above must be conducted in accordance with the following site-specific conditions of approval.

Condition number	Condition																																																																																																																													
S4.	The release of contaminants to the atmosphere must only occur in accordance with the following table Swanbank – Air Contaminant Release Limits and Figure 3: Drawing 40005-GA-023: <table><tr><th colspan="7">Swanbank – Air Contaminant Release Limits</th></tr><tr><th>Monitoring Point (as identified in Figure 3: Drawing 40005-GA-023)</th><th>Minimum release height (metres)</th><th>Minimum velocity (m/sec)</th><th>Parameter</th><th colspan="2">Maximum Limit</th><th>Reference Period</th><th>Monitoring Frequency</th></tr><tr><td rowspan="3">GM1</td><td rowspan="3">7.6</td><td rowspan="3">10</td><td>NOx</td><td>500mg/m³</td><td>0.85g/s</td><td rowspan="16">Hourly mean</td><td rowspan="9">Annually</td></tr><tr><td>CO</td><td>1400mg/m³</td><td>2.38g/s</td></tr><tr><td>Total VOCs</td><td colspan="2">1000mg/m³</td></tr><tr><td rowspan="3">GM2</td><td rowspan="3">7.6</td><td rowspan="3">10</td><td>NOx</td><td>500mg/m³</td><td>0.85g/s</td><td rowspan="16">Hourly mean</td><td rowspan="9">Annually</td></tr><tr><td>CO</td><td>1400mg/m³</td><td>2.38g/s</td></tr><tr><td>Total VOCs</td><td colspan="2">1000mg/m³</td></tr><tr><td rowspan="3">GM3</td><td rowspan="3">7.6</td><td rowspan="3">10</td><td>NOx</td><td>500mg/m³</td><td>0.85g/s</td><td rowspan="16">Hourly mean</td><td rowspan="9">Annually</td></tr><tr><td>CO</td><td>1400mg/m³</td><td>2.38g/s</td></tr><tr><td>Total VOCs</td><td colspan="2">1000mg/m³</td></tr><tr><td rowspan="4">FL1A</td><td rowspan="4">8.5</td><td rowspan="4">5</td><td>NOx</td><td>150mg/m³</td><td>0.37g/s</td><td rowspan="16">Hourly mean</td><td rowspan="12">Annually or less frequently as prescribed by condition S5</td></tr><tr><td>CO</td><td>700mg/m³</td><td>4.6g/s</td></tr><tr><td>Total VOCs</td><td colspan="2">10mg/m³</td></tr><tr><td>Temperature</td><td colspan="2">Minimum >500°C</td></tr><tr><td rowspan="4">FL2A</td><td rowspan="4">8.5</td><td rowspan="4">5</td><td>NOx</td><td>150mg/m³</td><td>0.37g/s</td><td rowspan="16">Hourly mean</td><td rowspan="12">Annually or less frequently as prescribed by condition S5</td></tr><tr><td>CO</td><td>700mg/m³</td><td>4.6g/s</td></tr><tr><td>Total VOCs</td><td colspan="2">10mg/m³</td></tr><tr><td>Temperature</td><td colspan="2">Minimum >500°C</td></tr><tr><td rowspan="4">FL3A</td><td rowspan="4">8.5</td><td rowspan="4">5</td><td>NOx</td><td>150mg/m³</td><td>0.37g/s</td><td rowspan="16">Hourly mean</td><td rowspan="12">Annually or less frequently as prescribed by condition S5</td></tr><tr><td>CO</td><td>700mg/m³</td><td>4.6g/s</td></tr><tr><td>Total VOCs</td><td colspan="2">10mg/m³</td></tr><tr><td>Temperature</td><td colspan="2">Minimum >500°C</td></tr><tr><td rowspan="4">FL4A</td><td rowspan="4">8.5</td><td rowspan="4">5</td><td>NOx</td><td>150mg/m³</td><td>0.37g/s</td><td rowspan="16">Hourly mean</td><td rowspan="12">Annually or less frequently as prescribed by condition S5</td></tr><tr><td>CO</td><td>700mg/m³</td><td>4.6g/s</td></tr><tr><td>Total VOCs</td><td colspan="2">10mg/m³</td></tr><tr><td>Temperature</td><td colspan="2">Minimum >500°C</td></tr></table>	Swanbank – Air Contaminant Release Limits							Monitoring Point (as identified in Figure 3: Drawing 40005-GA-023)	Minimum release height (metres)	Minimum velocity (m/sec)	Parameter	Maximum Limit		Reference Period	Monitoring Frequency	GM1	7.6	10	NOx	500mg/m ³	0.85g/s	Hourly mean	Annually	CO	1400mg/m ³	2.38g/s	Total VOCs	1000mg/m ³		GM2	7.6	10	NOx	500mg/m ³	0.85g/s	Hourly mean	Annually	CO	1400mg/m ³	2.38g/s	Total VOCs	1000mg/m ³		GM3	7.6	10	NOx	500mg/m ³	0.85g/s	Hourly mean	Annually	CO	1400mg/m ³	2.38g/s	Total VOCs	1000mg/m ³		FL1A	8.5	5	NOx	150mg/m ³	0.37g/s	Hourly mean	Annually or less frequently as prescribed by condition S5	CO	700mg/m ³	4.6g/s	Total VOCs	10mg/m ³		Temperature	Minimum >500°C		FL2A	8.5	5	NOx	150mg/m ³	0.37g/s	Hourly mean	Annually or less frequently as prescribed by condition S5	CO	700mg/m ³	4.6g/s	Total VOCs	10mg/m ³		Temperature	Minimum >500°C		FL3A	8.5	5	NOx	150mg/m ³	0.37g/s	Hourly mean	Annually or less frequently as prescribed by condition S5	CO	700mg/m ³	4.6g/s	Total VOCs	10mg/m ³		Temperature	Minimum >500°C		FL4A	8.5	5	NOx	150mg/m ³	0.37g/s	Hourly mean	Annually or less frequently as prescribed by condition S5	CO	700mg/m ³	4.6g/s	Total VOCs	10mg/m ³		Temperature	Minimum >500°C	
Swanbank – Air Contaminant Release Limits																																																																																																																														
Monitoring Point (as identified in Figure 3: Drawing 40005-GA-023)	Minimum release height (metres)	Minimum velocity (m/sec)	Parameter	Maximum Limit		Reference Period	Monitoring Frequency																																																																																																																							
GM1	7.6	10	NOx	500mg/m ³	0.85g/s	Hourly mean	Annually																																																																																																																							
			CO	1400mg/m ³	2.38g/s																																																																																																																									
			Total VOCs	1000mg/m ³																																																																																																																										
GM2	7.6	10	NOx	500mg/m ³	0.85g/s			Hourly mean	Annually																																																																																																																					
			CO	1400mg/m ³	2.38g/s																																																																																																																									
			Total VOCs	1000mg/m ³																																																																																																																										
GM3	7.6	10	NOx	500mg/m ³	0.85g/s					Hourly mean	Annually																																																																																																																			
			CO	1400mg/m ³	2.38g/s																																																																																																																									
			Total VOCs	1000mg/m ³																																																																																																																										
FL1A	8.5	5	NOx	150mg/m ³	0.37g/s		Hourly mean					Annually or less frequently as prescribed by condition S5																																																																																																																		
			CO	700mg/m ³	4.6g/s																																																																																																																									
			Total VOCs	10mg/m ³																																																																																																																										
			Temperature	Minimum >500°C																																																																																																																										
FL2A	8.5	5	NOx	150mg/m ³	0.37g/s				Hourly mean				Annually or less frequently as prescribed by condition S5																																																																																																																	
			CO	700mg/m ³	4.6g/s																																																																																																																									
			Total VOCs	10mg/m ³																																																																																																																										
			Temperature	Minimum >500°C																																																																																																																										
FL3A	8.5	5	NOx	150mg/m ³	0.37g/s	Hourly mean					Annually or less frequently as prescribed by condition S5																																																																																																																			
			CO	700mg/m ³	4.6g/s																																																																																																																									
			Total VOCs	10mg/m ³																																																																																																																										
			Temperature	Minimum >500°C																																																																																																																										
FL4A	8.5	5	NOx	150mg/m ³	0.37g/s			Hourly mean				Annually or less frequently as prescribed by condition S5																																																																																																																		
			CO	700mg/m ³	4.6g/s																																																																																																																									
			Total VOCs	10mg/m ³																																																																																																																										
			Temperature	Minimum >500°C																																																																																																																										
NOTE: Monitoring Points in Swanbank – Air Contaminant Release Limits are identified on Figure 3: Drawing 40005-GA-023 as being located at: <table><tr><td>GDA2020/MGA Zone 56 Grid Coordinates</td></tr></table>		GDA2020/MGA Zone 56 Grid Coordinates																																																																																																																												
GDA2020/MGA Zone 56 Grid Coordinates																																																																																																																														

	<table><tr><th>Description</th><th>Easting</th><th>Northing</th></tr><tr><td>GM1A</td><td>482626.775</td><td>6940728.333</td></tr><tr><td>GM2A</td><td>482620.213</td><td>6940729.717</td></tr><tr><td>GM3A</td><td>482614.323</td><td>6940730.860</td></tr><tr><td>FL1A</td><td>482650.673</td><td>6940737.855</td></tr><tr><td>FL2A</td><td>482649.909</td><td>6940733.682</td></tr><tr><td>FL3A</td><td>482649.145</td><td>6940729.509</td></tr><tr><td>FL4A</td><td>482662.106</td><td>6940735.762</td></tr></table>	Description	Easting	Northing	GM1A	482626.775	6940728.333	GM2A	482620.213	6940729.717	GM3A	482614.323	6940730.860	FL1A	482650.673	6940737.855	FL2A	482649.909	6940733.682	FL3A	482649.145	6940729.509	FL4A	482662.106	6940735.762
Description	Easting	Northing																							
GM1A	482626.775	6940728.333																							
GM2A	482620.213	6940729.717																							
GM3A	482614.323	6940730.860																							
FL1A	482650.673	6940737.855																							
FL2A	482649.909	6940733.682																							
FL3A	482649.145	6940729.509																							
FL4A	482662.106	6940735.762																							
S5.	If the monitoring results demonstrate that the release of contaminants measured at a monitoring point marked as FL1A, FL2A, FL3A or FL4A does not exceed 80% of any release limit (as prescribed in condition S4), the subsequent monitoring for this monitoring point is permitted to be conducted every four years.																								
S6.	If the contaminant release monitoring at a monitoring point marked as FL1A, FL2A, FL3A or FL4A is conducted every four years and the release of contaminants from this point exceeds 80% of any release limit, the remaining monitoring points must be tested to confirm compliance with the release limits as soon as practicable.																								
S7.	The holder of this environmental authority must notify the administering authority in writing before any monitoring frequency change for the monitoring points FL1A, FL2A, FL3A or FL4A. The written notification is to include all relevant monitoring results.																								
S8.	Before applying to surrender this environmental authority, the site ¹ must be rehabilitated to achieve a safe, stable and non-polluting landform.																								

¹ The site means the location of the activity at 66-114 Blackheath Road, SWANBANK (Lot 104/RP839073)

Figure 3: Drawing 40005-GA-023– Swanbank Renewable Energy Facility – Proposed Power Station Site Layout (date: 03/04/13)

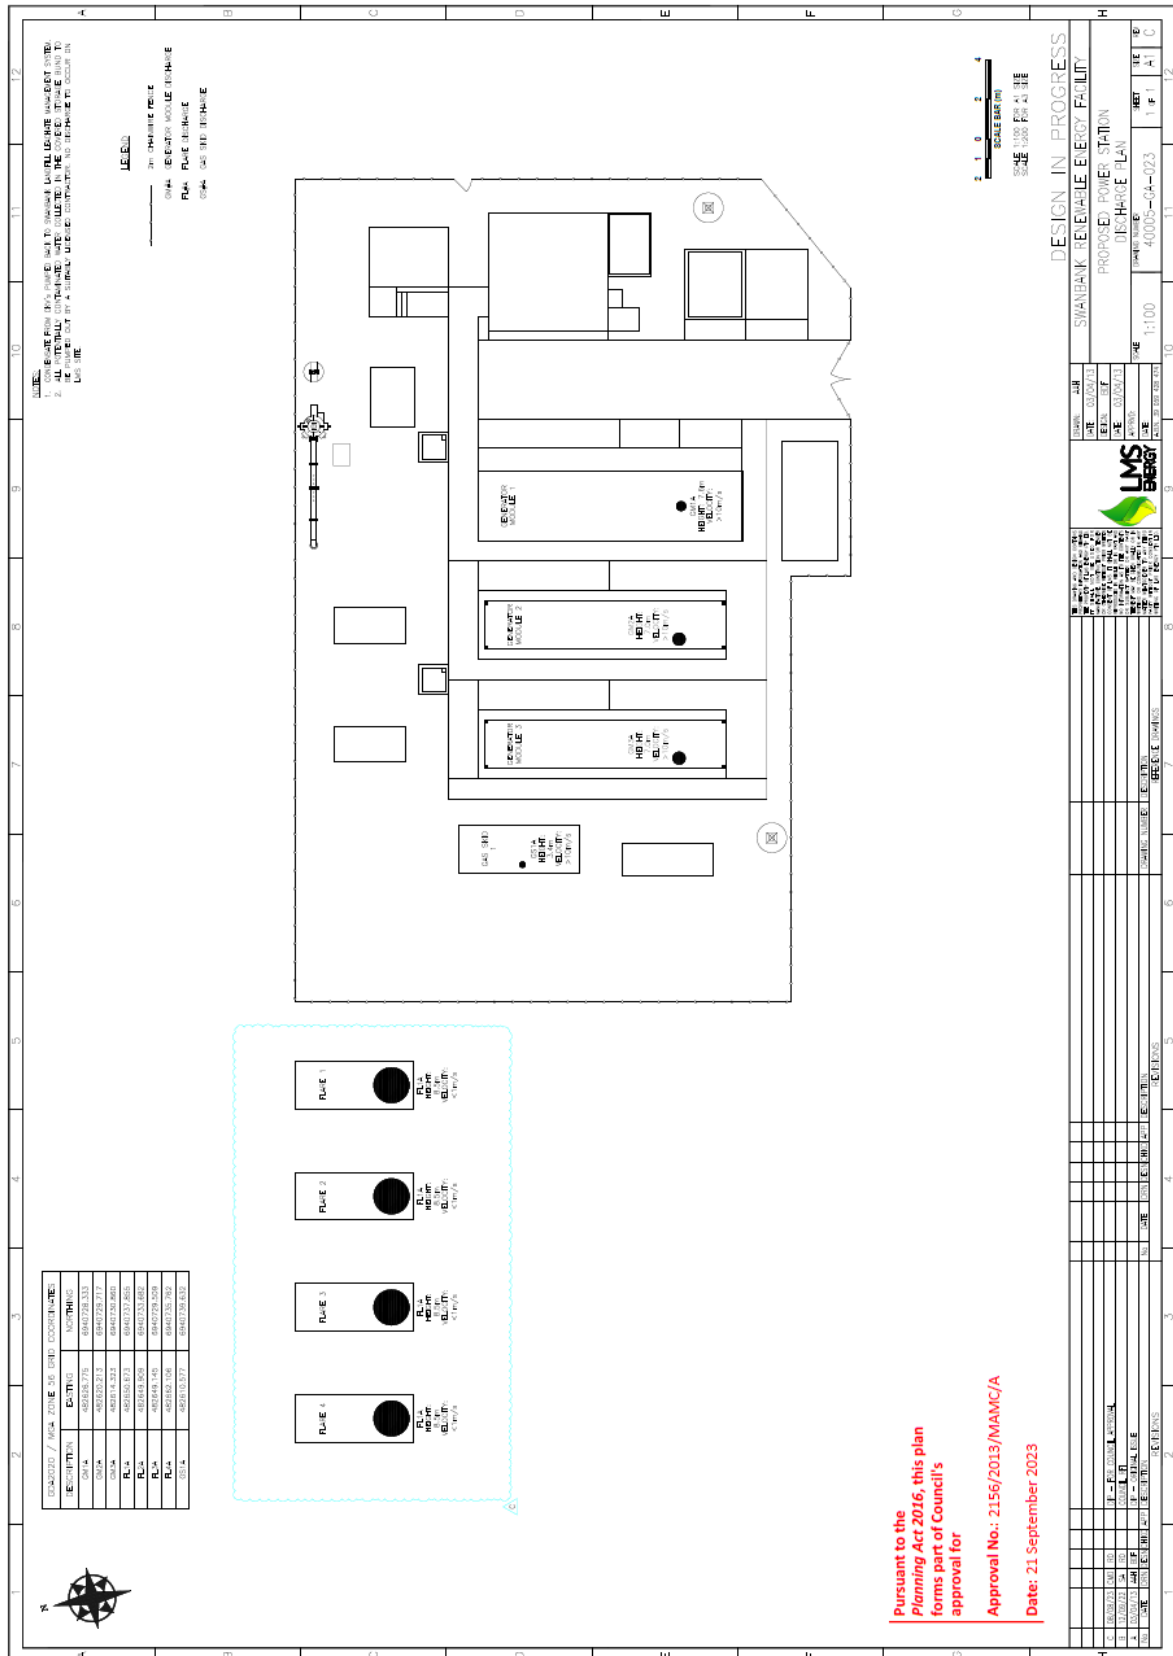

Part 4 – Conditions relevant to Stapylton site only


Environmentally relevant activity	Location
ERA 15 - Fuel burning, Using fuel burning equipment that is capable of burning at least 500kg of fuel in an hour	32 Rossmans Road STAPYLTON (Lot 1 Plan RP6936)

In addition to Part 1, the environmentally relevant activities conducted at the location above must be conducted in accordance with the following site-specific conditions of approval:

S9.	The release of contaminants to the atmosphere from a point source must only occur from those release points identified in the following Table - Air and must be directed vertically upwards without any impedance or hindrance: <table><tr><th colspan="6">Table – Air</th></tr><tr><th>Release point number</th><th>Minimum release height (meters)</th><th>Minimum release velocity (m / sec)</th><th>Contaminant release</th><th>Maximum release limit</th><th>Sampling frequency</th></tr><tr><td rowspan="3">GM1</td><td rowspan="3">6.85</td><td rowspan="3">8</td><td>Oxides of nitrogen (NOx)</td><td>0.95 g/s</td><td rowspan="3">Annually</td></tr><tr><td>Carbon monoxide</td><td>1.70 g/s</td></tr><tr><td>Non-methane hydrocarbons (NMHC)</td><td>0.25 g/s</td></tr><tr><td rowspan="3">GM2</td><td rowspan="3">6.85</td><td rowspan="3">8</td><td>Oxides of nitrogen (NOx)</td><td>0.95 g/s</td><td rowspan="3">Annually</td></tr><tr><td>Carbon monoxide</td><td>1.70 g/s</td></tr><tr><td>Non-methane hydrocarbons (NMHC)</td><td>0.25 g/s</td></tr><tr><td rowspan="3">GM3</td><td rowspan="3">6.85</td><td rowspan="3">8</td><td>Oxides of nitrogen (NOx)</td><td>0.95 g/s</td><td rowspan="3">Annually</td></tr><tr><td>Carbon monoxide</td><td>1.70 g/s</td></tr><tr><td>Non-methane hydrocarbons (NMHC)</td><td>0.25 g/s</td></tr><tr><td rowspan="3">GM4</td><td rowspan="3">6.85</td><td rowspan="3">8</td><td>Oxides of nitrogen (NOx)</td><td>0.95 g/s</td><td rowspan="3">Annually</td></tr><tr><td>Carbon monoxide</td><td>1.70 g/s</td></tr><tr><td>Non-methane hydrocarbons (NMHC)</td><td>0.25 g/s</td></tr></table> Associated Monitoring Requirements 1. Release locations must be in accordance with Figure 4: Stapylton Renewable Energy Facility, Power Station Discharge Plan.	Table – Air						Release point number	Minimum release height (meters)	Minimum release velocity (m / sec)	Contaminant release	Maximum release limit	Sampling frequency	GM1	6.85	8	Oxides of nitrogen (NOx)	0.95 g/s	Annually	Carbon monoxide	1.70 g/s	Non-methane hydrocarbons (NMHC)	0.25 g/s	GM2	6.85	8	Oxides of nitrogen (NOx)	0.95 g/s	Annually	Carbon monoxide	1.70 g/s	Non-methane hydrocarbons (NMHC)	0.25 g/s	GM3	6.85	8	Oxides of nitrogen (NOx)	0.95 g/s	Annually	Carbon monoxide	1.70 g/s	Non-methane hydrocarbons (NMHC)	0.25 g/s	GM4	6.85	8	Oxides of nitrogen (NOx)	0.95 g/s	Annually	Carbon monoxide	1.70 g/s	Non-methane hydrocarbons (NMHC)	0.25 g/s
Table – Air																																																					
Release point number	Minimum release height (meters)	Minimum release velocity (m / sec)	Contaminant release	Maximum release limit	Sampling frequency																																																
GM1	6.85	8	Oxides of nitrogen (NOx)	0.95 g/s	Annually																																																
			Carbon monoxide	1.70 g/s																																																	
			Non-methane hydrocarbons (NMHC)	0.25 g/s																																																	
GM2	6.85	8	Oxides of nitrogen (NOx)	0.95 g/s	Annually																																																
			Carbon monoxide	1.70 g/s																																																	
			Non-methane hydrocarbons (NMHC)	0.25 g/s																																																	
GM3	6.85	8	Oxides of nitrogen (NOx)	0.95 g/s	Annually																																																
			Carbon monoxide	1.70 g/s																																																	
			Non-methane hydrocarbons (NMHC)	0.25 g/s																																																	
GM4	6.85	8	Oxides of nitrogen (NOx)	0.95 g/s	Annually																																																
			Carbon monoxide	1.70 g/s																																																	
			Non-methane hydrocarbons (NMHC)	0.25 g/s																																																	
S10.	Contaminants must be released to the atmosphere from a release point at a height and flow rate not less than the corresponding height and velocity stated for that release point in condition S9 <i>Table - Air</i> .																																																				
S11.	Contaminants must be released to the atmosphere from a release point at a mass emission rate, as measured at a monitoring point, in excess of that stated in condition S9 Table - Air .																																																				
S12.	Contaminants must be monitored not less frequently as prescribed in condition S9 Table - Air .																																																				

S13.	Monitoring of any releases to the atmosphere required by a condition of this approval must be carried out in accordance with the following requirements: 1. Monitoring provision for the release points listed in condition S9 Table - Air must comply with the Australian Standard AS 4323.1 1995 Stationary source emissions Methods 1. Selection of sampling positions (or more recent editions). 2. The following tests must be performed for each required determination specified in condition S9 Table - Air: i. gas velocity and volume flow rate; ii. temperature; and iii. water vapour concentration (moisture content). 3. Where practicable, samples must be taken when emissions are expected to be at maximum rate. 4. During the sampling period the following additional information must be gathered: i. production rate at the time of sampling; ii. raw material used; iii. number of equipment and mixing vessels operating; iv. operating or mixing temperature; v. product made; and vi. reference to the actual test methods.																																																							
S14.	Noise from the activity must not exceed the limits identified in the following table when measured in accordance with the associated monitoring requirements at any sensitive place or commercial place. <table><tr><th rowspan="2">Noise level dB(A) measured as</th><th colspan="3">Monday to Saturday</th><th colspan="3">Sundays and public holidays</th></tr><tr><th>7am - 6pm</th><th>6pm - 10pm</th><th>10pm - 7am</th><th>9am - 6pm</th><th>6pm - 10pm</th><th>10pm - 9am</th></tr><tr><td></td><td colspan="6">Noise measured at a 'Noise sensitive place'</td></tr><tr><td>LA10, adj, 10 mins</td><td>Bkg*+5</td><td>Bkg+5</td><td>Bkg+0</td><td>Bkg+5</td><td>Bkg+5</td><td>Bkg+0</td></tr><tr><td>LA1, adj, 10 mins</td><td>Bkg+10</td><td>Bkg+10</td><td>Bkg+5</td><td>Bkg+10</td><td>Bkg+10</td><td>Bkg+5</td></tr><tr><td></td><td colspan="6">Noise measured at a 'Commercial place'</td></tr><tr><td>LA10, adj, 10 mins</td><td>Bkg+10</td><td>Bkg+10</td><td>Bkg+5</td><td>Bkg+10</td><td>Bkg+10</td><td>Bkg+5</td></tr><tr><td>LA1, adj, 10 mins</td><td>Bkg+15</td><td>Bkg+15</td><td>Bkg+10</td><td>Bkg+15</td><td>Bkg+15</td><td>Bkg+10</td></tr></table> *Bkg means background noise level	Noise level dB(A) measured as	Monday to Saturday			Sundays and public holidays			7am - 6pm	6pm - 10pm	10pm - 7am	9am - 6pm	6pm - 10pm	10pm - 9am		Noise measured at a 'Noise sensitive place'						LA10, adj, 10 mins	Bkg*+5	Bkg+5	Bkg+0	Bkg+5	Bkg+5	Bkg+0	LA1, adj, 10 mins	Bkg+10	Bkg+10	Bkg+5	Bkg+10	Bkg+10	Bkg+5		Noise measured at a 'Commercial place'						LA10, adj, 10 mins	Bkg+10	Bkg+10	Bkg+5	Bkg+10	Bkg+10	Bkg+5	LA1, adj, 10 mins	Bkg+15	Bkg+15	Bkg+10	Bkg+15	Bkg+15	Bkg+10
Noise level dB(A) measured as	Monday to Saturday			Sundays and public holidays																																																				
	7am - 6pm	6pm - 10pm	10pm - 7am	9am - 6pm	6pm - 10pm	10pm - 9am																																																		
	Noise measured at a 'Noise sensitive place'																																																							
LA10, adj, 10 mins	Bkg*+5	Bkg+5	Bkg+0	Bkg+5	Bkg+5	Bkg+0																																																		
LA1, adj, 10 mins	Bkg+10	Bkg+10	Bkg+5	Bkg+10	Bkg+10	Bkg+5																																																		
	Noise measured at a 'Commercial place'																																																							
LA10, adj, 10 mins	Bkg+10	Bkg+10	Bkg+5	Bkg+10	Bkg+10	Bkg+5																																																		
LA1, adj, 10 mins	Bkg+15	Bkg+15	Bkg+10	Bkg+15	Bkg+15	Bkg+10																																																		
S15.	When required by the administering authority, noise monitoring must be undertaken to investigate any complaint of noise nuisance, and the results notified within 14 days to the administering authority. Monitoring must include: - L_{Amax}, adj, T; - L_{AN}, T (where N equals statistical levels of 1, 10, 50, 90 and 99); - Max L_{pA}, T; - L_{Aeq}, T; - the level and frequency of occurrence of any impulsive or tonal noise; - atmospheric conditions including wind speed and direction; - effects due to extraneous factors such as traffic noise; and - location, date and time of recording.																																																							

Figure 4: Stapylton Renewable Energy Facility, Power Station Discharge Plan

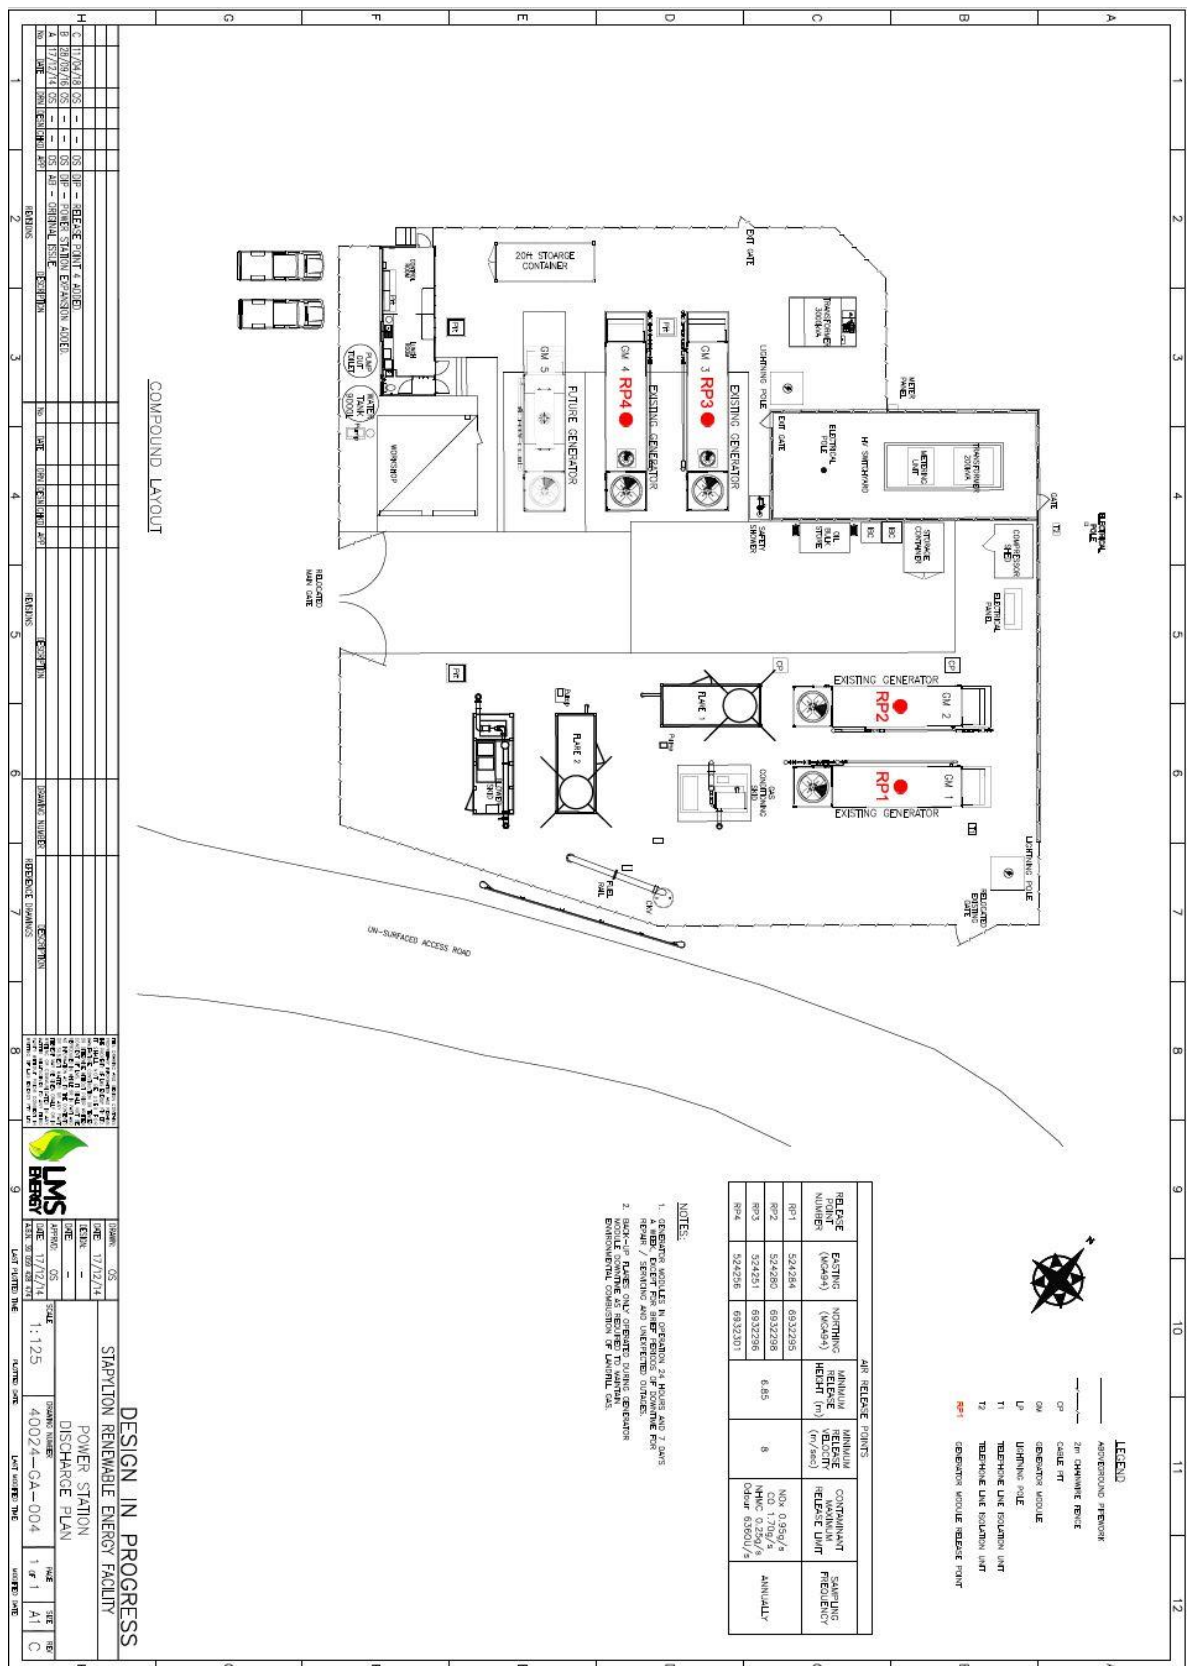

Definitions

Key terms and/or phrases used in this document are defined in this section. Where a term is not defined, the definition in the *Environmental Protection Act 1994*, its regulations or environmental protection policies must be used. If a word remains undefined it has its ordinary meaning.

Activity means the environmentally relevant activities, whether resource activities or prescribed activities, to which the environmental authority relates.

Administering authority means the Department of Environment and Science or its successor.

Appropriately qualified person(s) means a person or persons who has professional qualifications, training, skills or experience relevant to the nominated subject matter and can give authoritative assessment, advice and analysis to performance relative to the subject matter using the relevant protocols, standards, methods or literature.

Background noise level means either

- L A90,T being the A-weighted sound pressure level exceeded for 90 percent of the time period not less than 15 minutes, using Fast response measured in the absence of the noise under investigation; or
- L A_{bg}, T being the arithmetic average of the minimum readings measure in the absence of the noise under investigation during a representative time period of not less than 15 minutes using Fast response.

Commercial place means a place used as a workplace, an office or for business or commercial purposes and includes a place within the curtilage of such a place reasonably used by persons at that place.

Environmental nuisance (the Act) is unreasonable interference or likely interference with an environmental value caused by—

- a) aerosols, fumes, light, noise, odour, particles or smoke; or
- b) an unhealthy, offensive or unsightly condition because of contamination; or
- c) another way prescribed by regulation.

Environmental value (the Act) is—

- a) a quality or physical characteristic of the environment that is conducive to ecological health or public amenity or safety; or
- b) another quality of the environment identified and declared to be an environmental value under an environmental protection policy or regulation.

LA10, adj, 15mins means the A-weighted sound pressure level, (adjusted for tonal character and impulsiveness of the sound) exceeded for 10 percent of any 15-minute measurement period, using Fast response.

LA1, adj 15mins means the A-weighted sound pressure level, (adjusted for tonal character and impulsiveness of the sound) exceeded for 1 percent of any 10-minute measurement period, using Fast response.

LA, max, adj T means the A-weighted sound pressure level, (adjusted for tonal character and impulsiveness of the sound) exceeded for 1 percent of any 10-minute measurement period, using Fast response.

LAeq, adj 15 mins means an A-weighted sound pressure level of a continuous steady sound, adjusted for tonal character that within a period of 15 minutes, has the same mean square sound pressure of a sound that varies with time.

Land does not include waters.

Measures has the broadest interpretation and includes plant, equipment, physical objects, monitoring, procedures, actions, directions and competency.

Noxious means harmful or injurious to health or physical well-being.

Offensive means causing offence or displeasure; is unreasonably disagreeable to the sense; disgusting, nauseous or repulsive.

Records include breach notifications, written procedures, analysis results, monitoring reports and monitoring programs required under a condition of this authority.

Sensitive place includes the following and includes a place within the curtilage of such a place reasonably used by persons at that place:

- a) a dwelling, residential allotment, mobile home or caravan park, residential marina or other residential premises; or
- b) a motel, hotel or hostel; or
- c) a kindergarten, school, university or other educational institution; or
- d) a medical centre or hospital; or
- e) a protected area under the *Nature Conservation Act 1992*, the *Marine Parks Act 2004* or a World Heritage Area; or
- f) a public thoroughfare, park or gardens; or
- g) for noise, a place defined as a sensitive receptor for the purposes of the *Environmental Protection (Noise) Policy 2008*.

You means the holder of the environmental authority.

Waters includes any river, stream, lake, lagoon, pond, swamp, wetland, unconfined surface water, unconfined water natural or artificial watercourse, bed and bank of any waters, dams, non-tidal or tidal waters (including the sea), stormwater channel, stormwater drain, roadside gutter, stormwater run-off, and groundwater and any part- thereof.

END OF ENVIRONMENTAL AUTHORITY