

PRCP schedule

Environmental Protection Act 1994

PRCP Schedule P-PRCP-100730900

This PRCP schedule is issued by the administering authority under Chapter 5 of the Environmental Protection Act 1994.

PRCP schedule: P-PRCP-100730900

PRCP schedule holder(s)

Name(s)	Registered address
The Austral Brick Co. Pty Ltd	105 Gardner Road, ROCHEDALE, QLD, 4123

Location details

Location(s)
Mining Lease (ML) 1151, ML1152, ML1156, ML50035

Take effect

In accordance with section 202B of the *Environmental Protection Act 1994* (EP Act), the PRCP schedule has effect on the day the environmental authority for carrying out relevant activities on land to which the schedule relates takes effect. Pursuant to section 202C of the EP Act, a PRCP schedule continues in force until the environmental authority for the relevant activities to which the PRCP schedule relates is cancelled or surrendered, even if the resource tenure expires or is cancelled and even if the relevant environmental authority is suspended under Chapter 5, part 11 or 11A of the EP Act.

RA Pettit

Signature

Robert Pettit

Department of the Environment, Tourism, Science and Innovation

Delegate of the administering authority

Environmental Protection Act 1994

4 February 2026

Date

Enquiries:

Minerals Business Centre

PO Box 7230, Cairns QLD 4870

Phone: (07) 4222 5352

Email: ESCairns@detsi.qld.gov.au

Environmental Protection Act 1994

PRCP Schedule P-PRCP-100730900

This PRCP schedule is issued by the administering authority under Chapter 5 of the Environmental Protection Act 1994.

Obligations under the *Environmental Protection Act 1994*

Pursuant to section 202E of the EP Act, if there is an inconsistency between an environmental authority and a PRCP schedule, the environmental authority prevails to the extent of the inconsistency.

Pursuant to section 285 of the EP Act:

- the holder of a PRCP schedule must commission an audit of the schedule by a rehabilitation auditor for the following periods (each an audit period) —
 - (a) the 3-year period starting on the day the schedule takes effect
 - (b) each 3-year period starting on the day after the previous audit period ended.
- the holder must, within 4 months after the end of each audit period, give the administering authority -
 - (a) the rehabilitation auditor's report (an audit report) about the audit that complies with section 286 of the EP Act, and
 - (b) a declaration for the audit report that complies with section 285 of the EP Act.

In addition to the requirements found in the conditions of this PRCP schedule, the holder must also meet their obligations under the environmental authority, the EP Act, and the regulations made under the EP Act. For example, the holder must comply with the following provisions of the EP Act:

- general environmental duty (section 319)
- duty to notify environmental harm (section 320-320G)
- offence of causing serious or material environmental harm (sections 437-439)
- offence of causing environmental nuisance (section 440)
- offence of depositing prescribed water contaminants in waters and related matters (section 440ZG)
- offence to place contaminant where environmental harm or nuisance may be caused (section 443).

PRCP schedule

The PRCP schedule incorporates the following sections:

- Section A - Conditions of PRCP schedule
- Section B - Final site design and reference maps
- Section C - Post mining land uses

Environmental Protection Act 1994

PRCP Schedule P-PRCP-100730900

This PRCP schedule is issued by the administering authority under Chapter 5 of the Environmental Protection Act 1994.

1 Section A - Conditions of PRCP schedule

Pursuant to section 206A of the EP Act:

- it is a condition of this PRCP schedule that, in carrying out a relevant activity under the schedule, the holder must comply with a requirement stated in the environmental authority relevant to carrying out the activity.
- it is a condition of this PRCP schedule that the holder must comply with the following matters stated in the schedule -
 - (a) each rehabilitation milestone and management milestone
 - (b) when each rehabilitation milestone and management milestone is to be achieved

General conditions

PRCP1 The holder must comply with each milestone criteria stated in the schedule

PRCP2 Where a milestone criterion requires any of the following, the holder must keep records of the actions taken to comply with the criterion as well as the results and provide a copy of this information to the Administering Authority on request -

- certifications or assessments to be undertaken;
- monitoring or maintenance to be carried out;
- final design plans and/or specifications to be developed; and
- reports such as contaminated land investigations, rehabilitation reports (including monitoring records), validation reports, Quality Assurance/Quality Control reports.

PRCP3 Where land becomes available for rehabilitation earlier than the nominated 'Date area is available', progressive rehabilitation for that land must commence as soon as practicable. Progressive rehabilitation commenced early under this condition must be carried out in accordance with the milestones and criteria in this schedule, except that each of the dates by which milestones are to be completed is brought forward by the same amount of time as the commencement was brought forward.


END OF CONDITIONS

PRCP Schedule P-PRCP-100730900

This PRCP schedule is issued by the administering authority under Chapter 5 of the Environmental Protection Act 1994.

2 Section B - Final site design and reference maps

Figure 1. PRCP Schedule- Proposed Final Landform Burbank Site

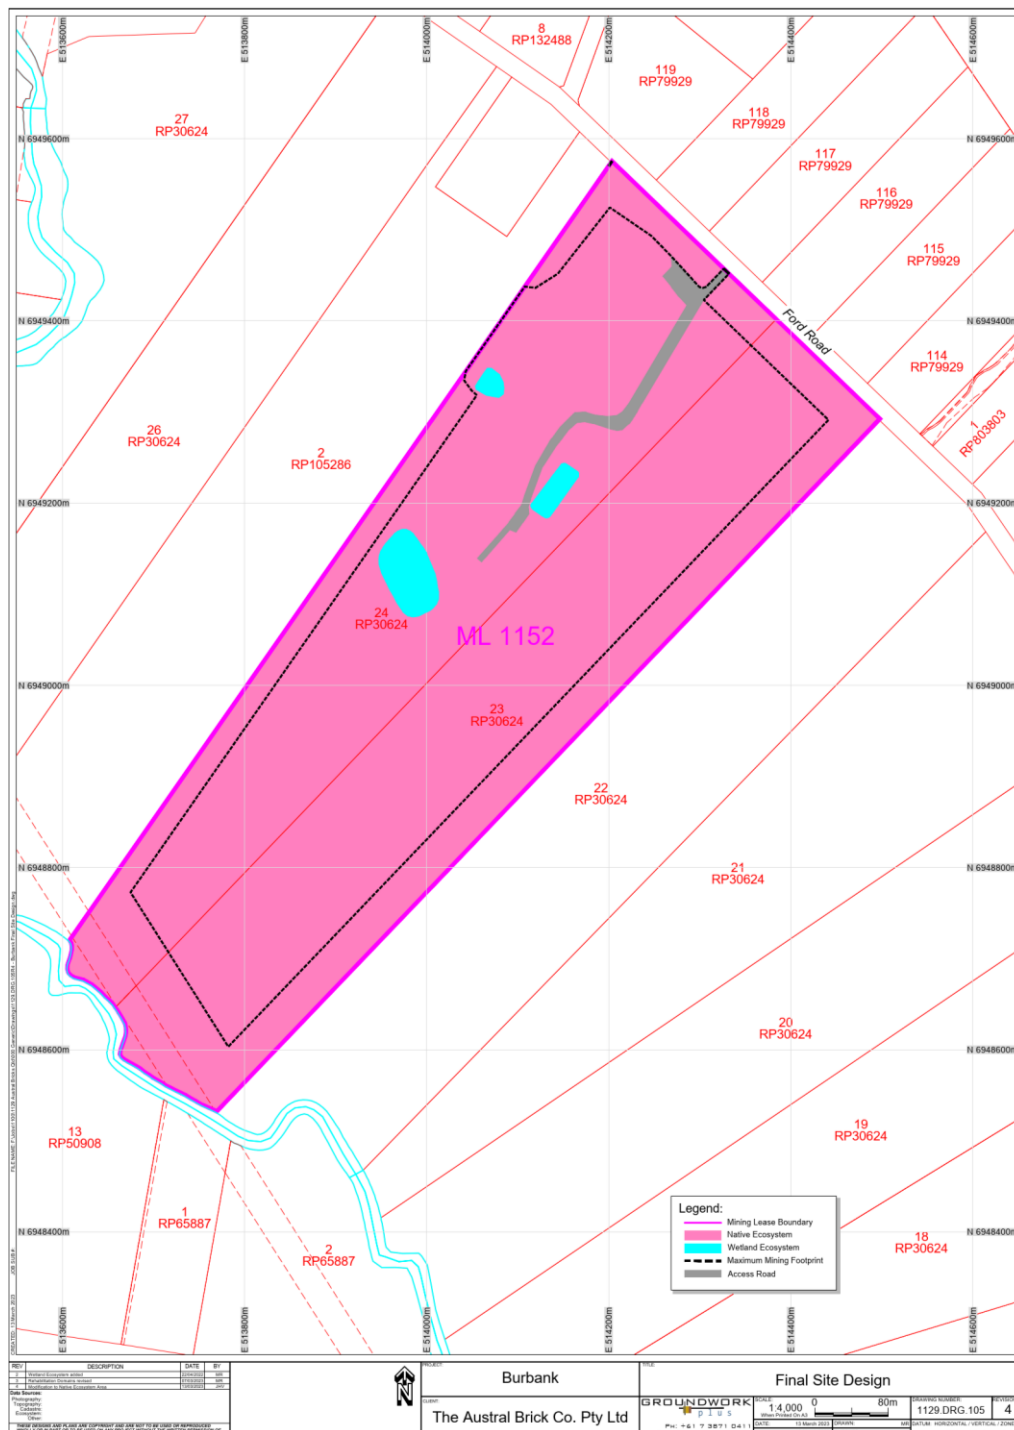

Environmental Protection Act 1994

PRCP Schedule P-PRCP-100730900

This PRCP schedule is issued by the administering authority under Chapter 5 of the Environmental Protection Act 1994.

Figure 2- PRCP Schedule - Burbank Site - Rehabilitation areas

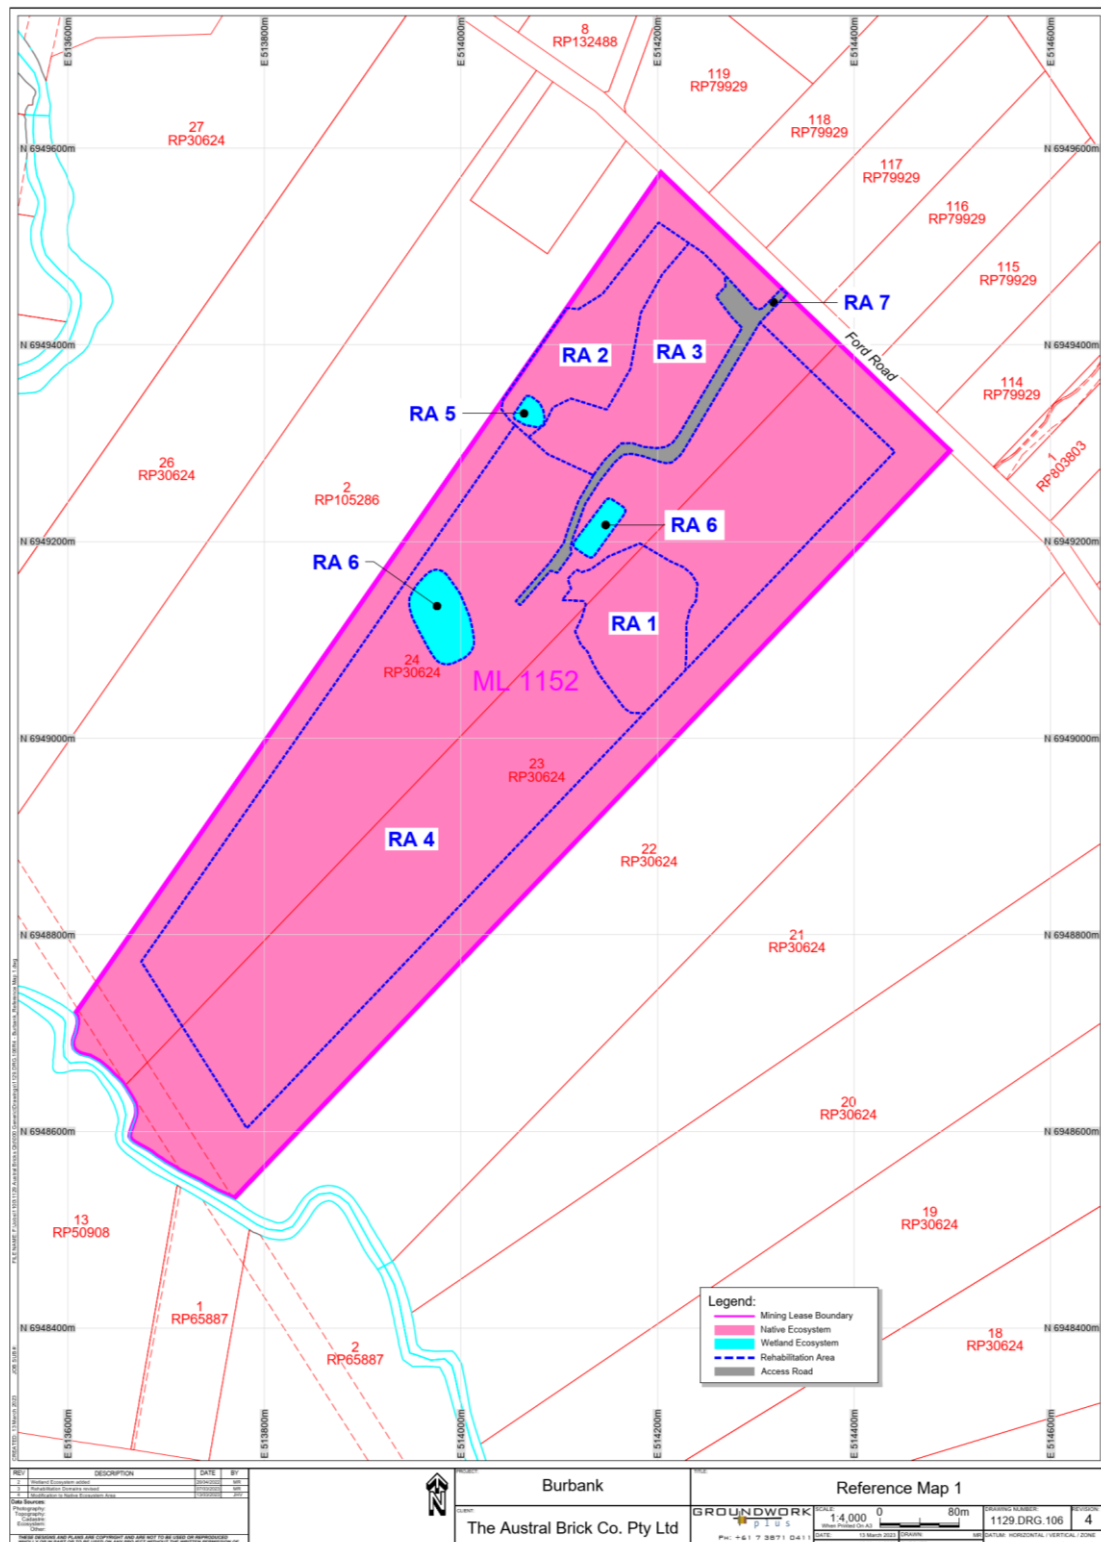


Figure 3 - PRCP Schedule - Proposed Final Landform - Redland Bay Site

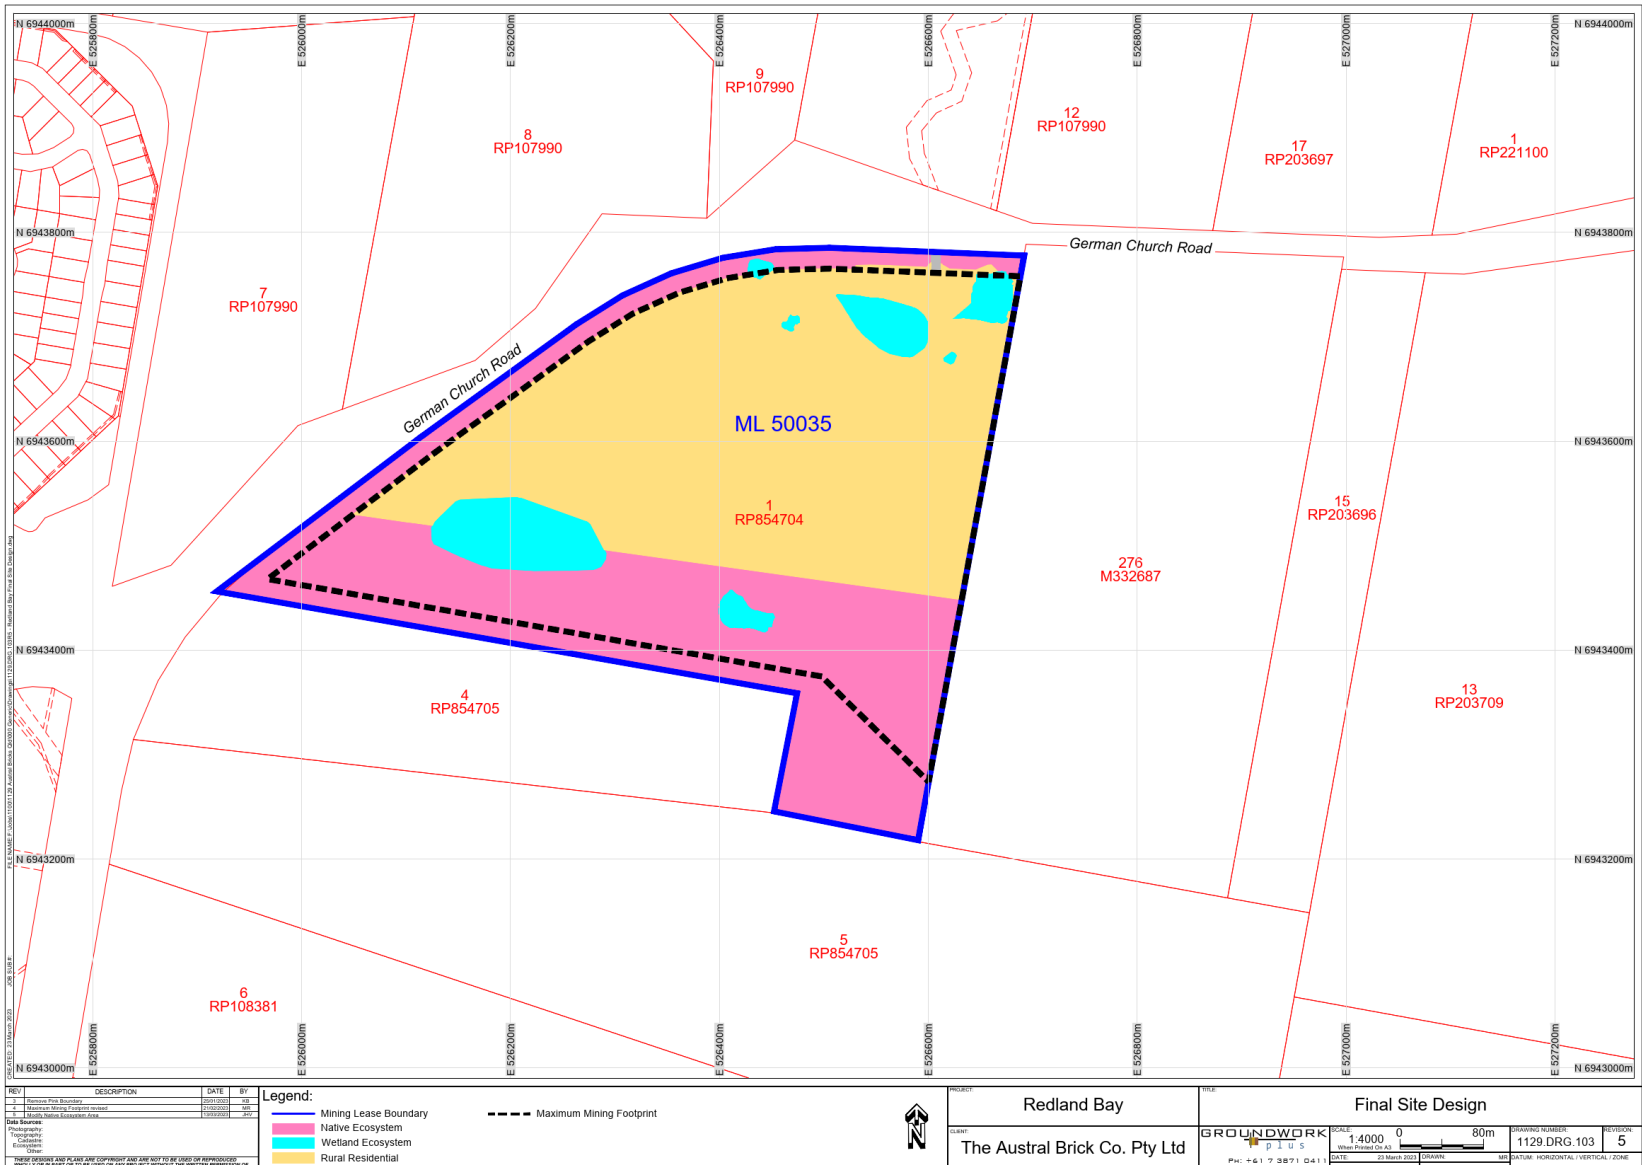




Figure 5. PRCP Schedule - Proposed Final Landform – Rochedale Site


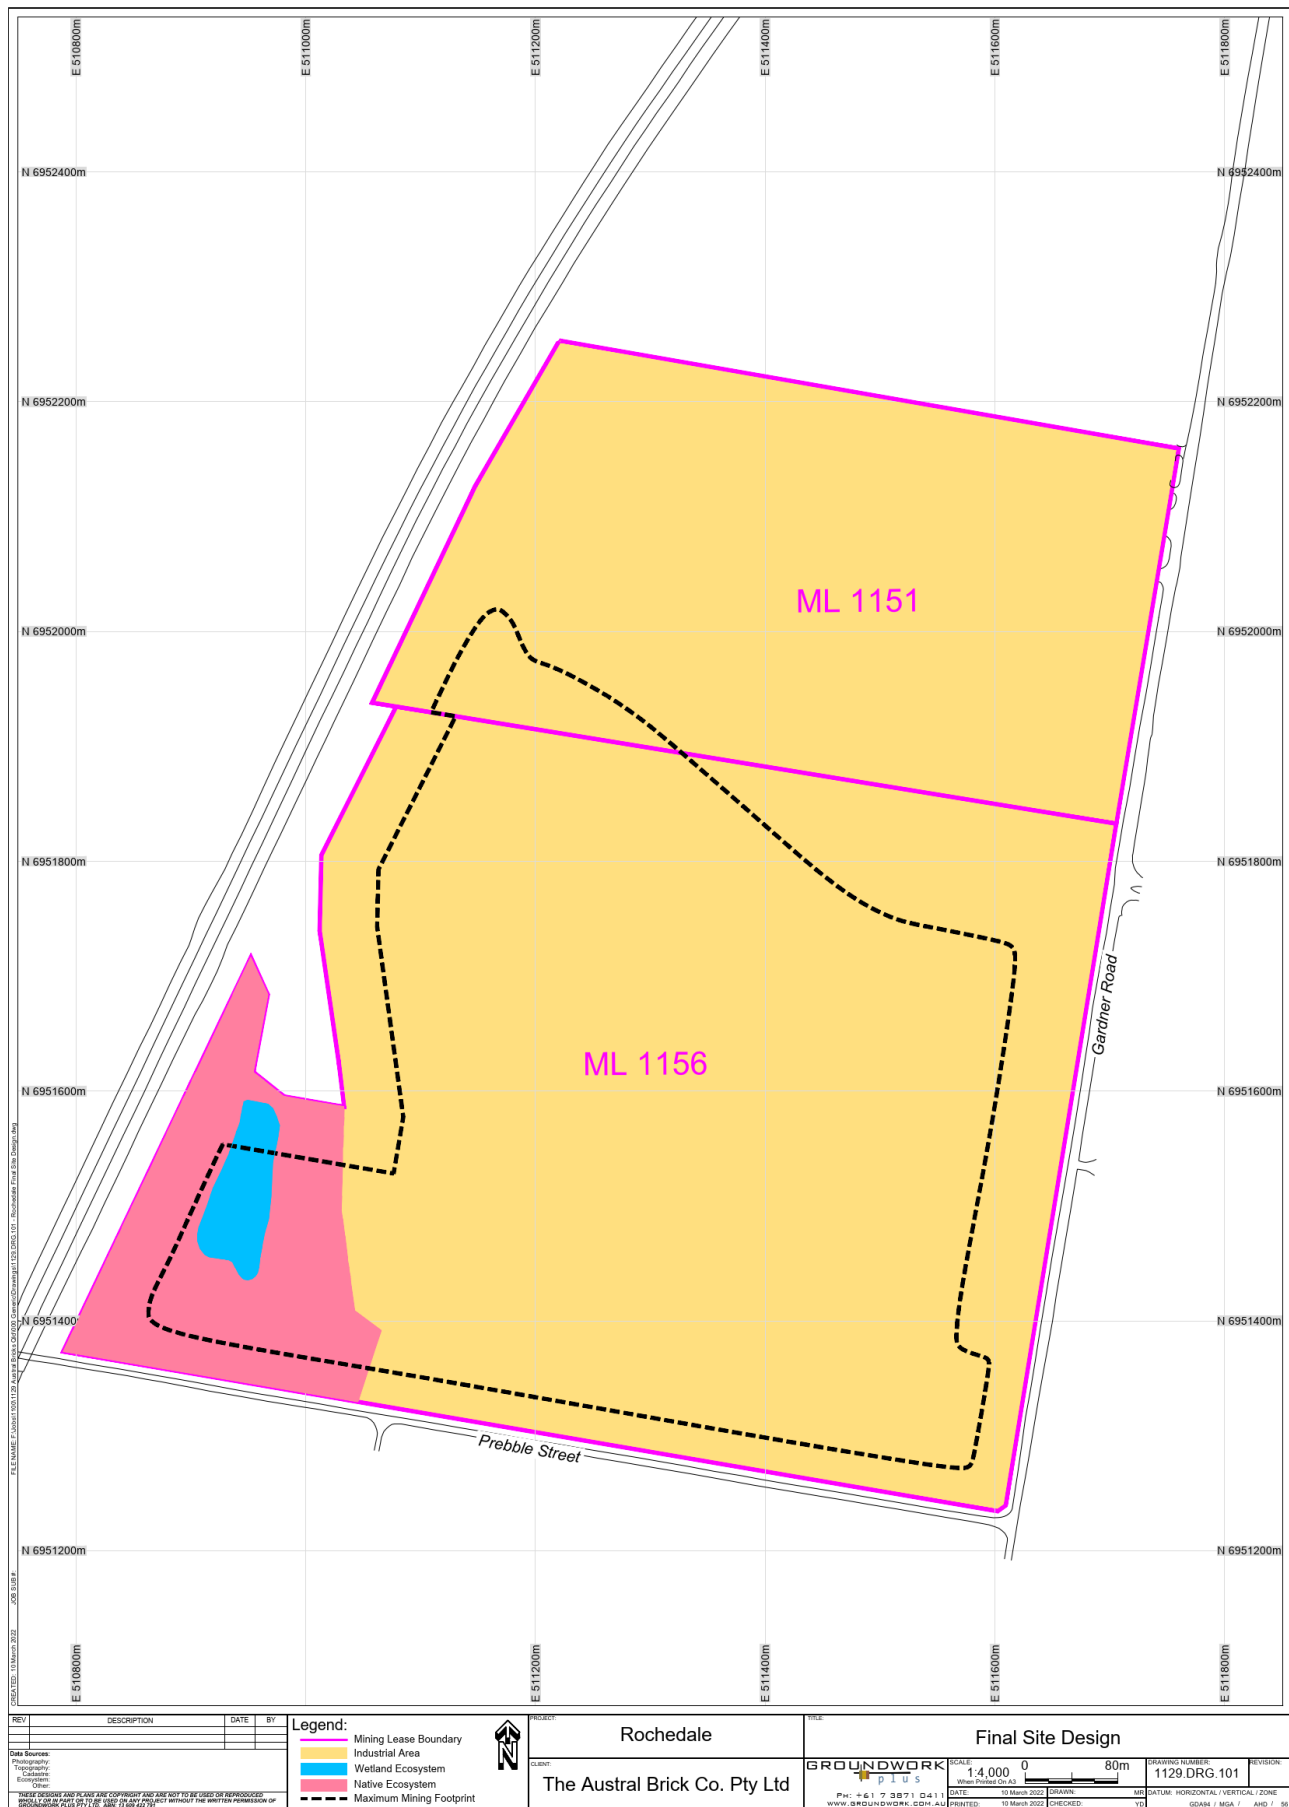


Figure 6. PRCP Schedule - Rochedale Site - Rehabilitation Areas

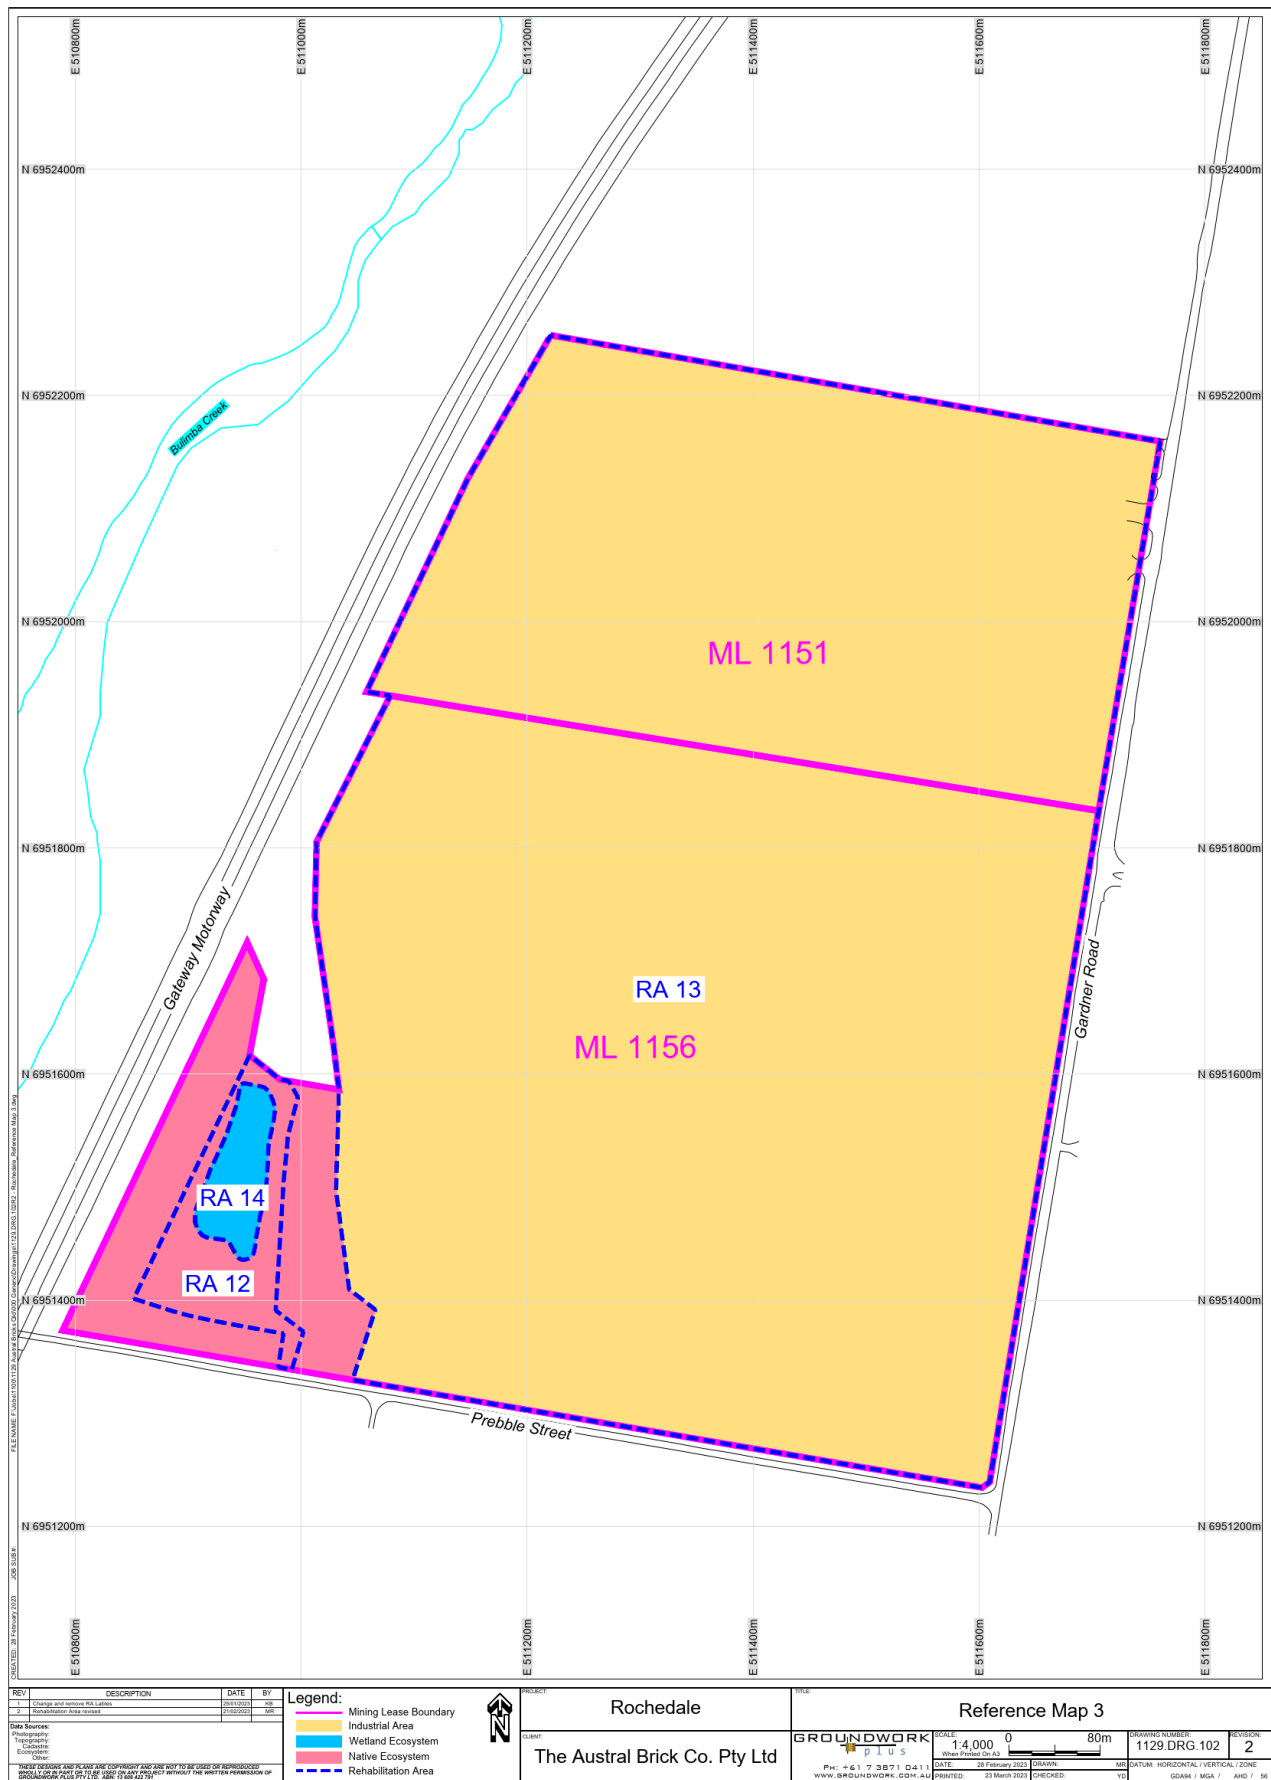

3 Section C – Post mining land uses

3.1 (RA1) Rehabilitation area 1

Post-mining land uses (PMLU)			
Rehabilitation area	RA1		
Relevant activities	Mining		
Total rehabilitation area size (ha)	1.52		
Commencement of first milestone RM11	Commenced prior to PRCP implementation		
PMLU	Native Ecosystem		
Date area is available	Pre-2023		
Cumulative area available (ha)	1.52		
Milestone completed by	10/12/2024	10/12/2029	10/12/2039
Milestone Reference	Cumulative area achieved (ha)		
RM9	1.52		
RM12		1.52	
RM16			1.52

3.2 (RA2) Rehabilitation area 2

Post-mining land uses (PMLU)			
Rehabilitation area	RA2		
Relevant activities	Mining		
Total rehabilitation area size (ha)	1.38		
Commencement of first milestone RM11	Commenced prior to PRCP implementation		
PMLU	Native Ecosystem		
Date area is available	Pre-2023		
Cumulative area available (ha)	1.38		
Milestone completed by	10/12/2024	10/12/2029	10/12/2039
Milestone Reference	Cumulative area achieved (ha)		
RM9	1.38		
RM12		1.38	
RM16			1.38

3.3 (RA3) Rehabilitation area 3

Post-mining land uses (PMLU)			
Rehabilitation area	RA3		
Relevant activities	Mining		
Total rehabilitation area size (ha)	2.00		
Commencement of first milestone RM11	Commenced prior to PRCP implementation		
PMLU	Native Ecosystem		
Date area is available	Pre-2023		
Cumulative area available (ha)	2.00		
Milestone completed by	10/12/2024	10/12/2029	10/12/2039
Milestone Reference	Cumulative area achieved (ha)		
RM9	2.00		
RM12		2.00	
RM16			2.00

3.4 (RA4) Rehabilitation area 4

Post mining land use PMLU															
Rehabilitation area		RA4													
Relevant activities		Mining													
Total rehabilitation area size (ha)		18.89													
Commencement of first milestone: RM1		10/12/2023													
PMLU		Native ecosystem													
Date area is available	10/12/2023	10/12/2024			10/12/2030	10/12/2032	10/12/2034		10/12/2036			10/12/2038		10/12/2040	
Cumulative area available (ha)	2.00	3.79			5.79	8.39	11.39		13.89			15.89		17.39	
Milestone completed by	9/12/2024	10/12/2025	10/12/2029	10/12/2030	10/12/2031	10/12/2033	10/12/2035	10/12/2036	10/12/2037	10/12/2040	10/12/2038	10/12/2039	10/12/2040	10/12/2041	10/12/2042
Fix Milestone Reference	Cumulative area achieved (ha)														
RM1	2.00	3.79			5.79	8.39	11.39		13.89			15.89		17.39	
RM4	2.00	3.79			5.79	8.39	11.39		13.89			15.89		17.39	
RM8	2.00	3.79			5.79	8.39	11.39		13.89			15.89		17.39	
RM9	2.00	3.79			5.79	8.39	11.39		13.89			15.89		17.39	
RM12			2.00	3.79				5.79		8.79	11.39				13.89
RM16													1.79		

(RA4) Rehabilitation area 4 (Continued)

Post mining land use PMLU														
Rehabilitation area		RA4 - Continued												
Relevant activities		Mining												
Total rehabilitation area size (ha)		18.89												
Commencement of first milestone: RM1		10/12/2023												
PMLU		Native ecosystem												
Date area is available	10/12/2042		10/12/2044											
Cumulative area available (ha)	18.59		18.89											
Milestone completed by	10/12/2043	10/12/2046	10/12/2045	10/12/2039	10/12/2044	10/12/2046	10/12/2048	10/12/2048	10/12/2050	10/12/2052	10/12/2054	10/12/2056	10/12/2058	10/12/2060
Milestone Reference	Cumulative area achieved (ha)													
RM1	18.59		18.89											
RM4	18.59		18.89											
RM8	18.59		18.89											
RM9	18.59		18.89											
RM12		15.39			17.39		18.59		18.89					
RM16				3.79		5.79		8.39	11.39	13.89	15.89	17.39	18.59	18.89

3.5 (RA5) Rehabilitation area 5

Post-mining land uses (PMLU)		
Rehabilitation area	RA5	
Relevant activities	Mining	
Total rehabilitation area size (ha)	0.07	
Commencement of first milestone RM11	Commenced prior to PRCP implementation	
PMLU	Wetland Ecosystem	
Date area is available	Pre-2023	
Cumulative area available (ha)	0.07	
Milestone completed by	10/12/2024	10/12/2029
Milestone Reference	Cumulative area achieved (ha)	
RM11	0.07	
RM15	0.07	
RM18		0.07

3.6 (RA6) Rehabilitation area 6

Post-mining land uses (PMLU)						
Rehabilitation area	RA6					
Relevant activities	Sediment basin					
Total rehabilitation area size (ha)	0.58					
Commencement of first milestone: RM1	10/12/2028					
PMLU	Wetland Ecosystem					
Date area is available	10/12/2028			10/12/2043		
Cumulative area available (ha)	0.15			0.58		
Milestone completed by	10/12/2029	10/12/2031	10/12/2034	10/12/2044	10/12/2045	10/12/2046
Milestone Reference	Cumulative area achieved (ha)					
RM1	0.15			0.58		
RM7	0.15			0.58		
RM8	0.15			0.58		
RM11	0.15			0.58		
RM15		0.15			0.58	
RM18			0.15			0.58

3.7 (RA7) Rehabilitation area 7

Post-mining land uses (PMLU)	
Rehabilitation area	RA7
Relevant activities	Access road
Total rehabilitation area size (ha)	0.56
Commencement of first milestone RM2	10/12/2043
PMLU	Road
Date area is available	10/12/2043
Cumulative area available (ha)	0.56
Milestone completed by	10/12/2043
Milestone Reference	Cumulative area achieved (ha)
RM2	0.56

3.8 (RA8) Rehabilitation area 8

Post-mining land uses (PMLU)																			
Rehabilitation area		RA8																	
Relevant activities		Mining																	
Total rehabilitation area size (ha)		5.21																	
Commencement of first milestone: RM1		10/12/2042																	
PMLU		Native Ecosystem																	
Date area is avail able	10/12/2042		10/12/2052		10/12/2062		10/12/2072		10/12/2082		10/12/2092		10/12/2102		10/12/2112		10/12/2122		10/12/2132
Cum ulativ e area avail able (ha)	0.33		0.66		0.99		1.32		1.65		1.98		2.31		2.54		2.87		3.20
Miles tone comp leted by	10/12/2043	10/12/2048	10/12/2053	10/12/2058	10/12/2063	10/12/2068	10/12/2073	10/12/2078	10/12/2083	10/12/2088	10/12/2093	10/12/2098	10/12/2103	10/12/2108	10/12/2113	10/12/2118	10/12/2123	10/12/2128	10/12/2133
Miles tone Refer ence	Cumulative area achieved (ha)																		
RM1	0.33		0.66		0.99		1.32		1.65		1.98		2.31		2.54		2.87		3.20
RM2	0.33		0.66		0.99		1.32		1.65		1.98		2.31		2.54		2.87		3.20
RM3	0.33		0.66		0.99		1.32		1.65		1.98		2.31		2.54		2.87		3.20
RM4	0.33		0.66		0.99		1.32		1.65		1.98		2.31		2.54		2.87		3.20
RM8	0.33		0.66		0.99		1.32		1.65		1.98		2.31		2.54		2.87		3.20
RM9	0.33		0.66		0.99		1.32		1.65		1.98		2.31		2.54		2.87		3.20
RM12		0.33		0.66		0.99		1.32		1.65		1.98		2.31		2.54		2.87	
RM16				0.33		0.66		0.99		1.32		1.65		1.98		2.31		2.54	

(RA8) Rehabilitation area 8 (Continued)

Post-mining land uses (PMLU)																		
Rehabilitation area		RA8 - Continued																
Relevant activities		Mining																
Total rehabilitation area size (ha)		5.21																
Commencement of first milestone: RM1		10/12/2042																
PMLU		Native Ecosystem																
Date area is available		10/12/2142		10/12/2152		10/12/2162		10/12/2172		10/12/2182		10/12/2192		10/12/2195				
Cumulative area available (ha)		3.53		3.86		4.19		4.52		4.75		4.98		5.2132				
Milestones completed by	10/12/2138	10/12/2143	10/12/2148	10/12/2153	10/12/2138	10/12/2163	10/12/2168	10/12/2173	10/12/2178	10/12/2183	10/12/2188	10/12/2193	10/12/2198	10/12/2196	10/12/2201	10/12/2208		10/12/2211
Milestones Reference	Cumulative area achieved (ha)																	
RM1		3.53		3.86		4.19		4.52		4.75		4.98		5.2132				
RM2		3.53		3.86		4.19		4.52		4.75		4.98		5.2132				
RM3		3.53		3.86		4.19		4.52		4.75		4.98		5.2132				
RM4		3.53		3.86		4.19		4.52		4.75		4.98		5.2132				
RM8		3.53		3.86		4.19		4.52		4.75		4.98		5.2132				
RM9		3.53		3.86		4.19		4.52		4.75		4.98		5.2132				
RM12	3.20		3.53		3.86		4.19		4.52		4.75		4.98		5.2132			
RM16	2.87		3.20		3.53		3.86		4.19		4.52		4.75			4.98		5.2132

3.9 (RA9) Rehabilitation area 9

Post-mining land uses (PMLU)																	
Rehabilitation area			RA9														
Relevant activities			Mining														
Total rehabilitation area size (ha)			12.06														
Commencement of first milestone: RM1			10/12/2042														
PMLU			Rural Residential														
Date area is available	10/12/2042		10/12/2052		10/12/2062		10/12/2072		10/12/2082		10/12/2092		10/12/2102		10/12/2112		10/12/2122
Cumulative area available (ha)	0.75		1.50		2.25		3.00		3.75		4.50		5.25		6.00		6.75
Milestone completed by	10/12/2043	10/12/2045	10/12/2053	10/12/2055	10/12/2063	10/12/2065	10/12/2073	10/12/2075	10/12/2083	10/12/2085	10/12/2093	10/12/2095	10/12/2103	10/12/2105	10/12/2113	10/12/2115	10/12/2123
Milestone Reference	Cumulative area achieved (ha)																
RM1	0.75		1.50		2.25		3.00		3.75		4.50		5.25		6.00		6.75
RM2	0.75		1.50		2.25		3.00		3.75		4.50		5.25		6.00		6.75
RM3	0.75		1.50		2.25		3.00		3.75		4.50		5.25		6.00		6.75
RM5	0.75		1.50		2.25		3.00		3.75		4.50		5.25		6.00		6.75
RM8	0.75		1.50		2.25		3.00		3.75		4.50		5.25		6.00		6.75
RM10	0.75		1.50		2.25		3.00		3.75		4.50		5.25		6.00		6.75
RM13	0.75		1.50		2.25		3.00		3.75		4.50		5.25		6.00		6.75
RM17		0.75		1.50		2.25		3.00		3.75		4.50		5.25		6.00	

(RA9) Rehabilitation area 9 (Continued)

Post-mining land uses (PMLU)																	
Rehabilitation area		RA9 – Continued															
Relevant activities		Mining															
Total rehabilitation area size (ha)		12.06															
Commencement of first milestone: RM1		10/12/2042															
PMLU		Rural Residential															
Date area is available		10/12/2132		10/12/2142		10/12/2152		10/12/2162		10/12/2172		10/12/2182		10/12/2192		10/12/2195	
Cumulative area available (ha)		7.50		8.25		9.00		9.75		10.50		11.25		11.75		12.06	
Milestone completed by	10/12/2125	10/12/2133	10/12/2135	10/12/2143	10/12/2145	10/12/2153	10/12/2135	10/12/2163	10/12/2165	10/12/2173	10/12/2175	10/12/2183	10/12/2185	10/12/2193	10/12/2195	10/12/2196	10/12/2198
Milestone Reference	Cumulative area achieved (ha)																
RM1		7.50		8.25		9.00		9.75		10.50		11.25		11.75		12.06	
RM2		7.50		8.25		9.00		9.75		10.50		11.25		11.75		12.06	
RM3		7.50		8.25		9.00		9.75		10.50		11.25		11.75		12.06	
RM5		7.50		8.25		9.00		9.75		10.50		11.25		11.75		12.06	
RM8		7.50		8.25		9.00		9.75		10.50		11.25		11.75		12.06	
RM10		7.50		8.25		9.00		9.75		10.50		11.25		11.75		12.06	
RM13		7.50		8.25		9.00		9.75		10.50		11.25		11.75		12.06	
RM17	6.75		7.50		8.25		9.00		9.75		10.50		11.25		11.75		12.06

3.10 (RA10) Rehabilitation area 10

Post-mining land uses (PMLU)		
Rehabilitation area	RA10	
Relevant activities	Water Storage	
Total rehabilitation area size (ha)	1.63	
Commencement of first milestone RM1	10/12/2195	
PMLU	Wetland Ecosystem	
Date area is available	10/12/2195	
Cumulative area available (ha)	1.63	
Milestone completed by	10/12/2196	10/12/2198
Milestone Reference	Cumulative area achieved (ha)	
RM1	1.63	
RM3	1.63	
RM7	1.63	
RM8	1.63	
RM11	1.63	
RM15	1.63	
RM18		1.63

3.11 (RA11) Rehabilitation area 11

Post-mining land uses (PMLU)	
Rehabilitation area	RA11
Relevant activities	Access Road
Total rehabilitation area size (ha)	0.02
Commencement of first milestone RM2	10/12/2195
PMLU	Road
Date area is available	10/12/2195
Cumulative area available (ha)	0.02
Milestone completed by	10/12/2195
Milestone Reference	Cumulative area achieved (ha)
RM2	0.02

3.12 (RA12) Rehabilitation area 12

	Post-mining land uses (PMLU)		
Rehabilitation area	RA12		
Relevant activities	Former mining and operational land		
Total rehabilitation area size (ha)	1.36		
Commencement of first milestone RM8	Commenced as at date of PRCP		
PMLU	Native Ecosystem		
Date area is available	Pre-2023		
Cumulative area available (ha)	1.36		
Milestone completed by	10/12/2025	10/12/2026	10/12/2031
Milestone Reference	Cumulative area achieved (ha)		
RM8	1.36		
RM9	1.36		
RM12		1.36	
RM16			1.36

3.13 (RA13) Rehabilitation area 13

Post-mining land uses (PMLU)				
Rehabilitation area	RA13			
Relevant activities	Mining			
Total rehabilitation area size (ha)	58.42			
Commencement of first milestone RM1	10/12/2072			
PMLU	Industrial			
Date area is available	10/12/2072	10/12/2073	10/12/2074	
Cumulative area available (ha)	58.42	58.42	58.42	
Milestone completed by	10/12/2073	10/12/2074	10/12/2075	10/12/2078
Milestone Reference	Cumulative area achieved (ha)			
RM1	58.42			
RM2	58.42			
RM3	58.42			
RM6		58.42		
RM8		58.42		
RM9		58.42		
RM14			58.42	
RM19				58.42

3.14 (RA14) Rehabilitation area 14

Post-mining land uses (PMLU)			
Rehabilitation area	RA14		
Relevant activities	Former mining and operational land		
Total rehabilitation area size (ha)	0.65		
Commencement of first milestone RM8	Commenced as at date of PRCP		
PMLU	Wetland Ecosystem		
Date area is available	Pre-2023		
Cumulative area available (ha)	0.65		0.65
Milestone completed by	10/12/2025	10/12/2026	10/12/2031
Milestone Reference	Cumulative area achieved (ha)		
RM8	0.65		
RM11	0.65		
RM15		0.65	
RM18			0.65

3.15 Rehabilitation area milestones

Milestone reference	Rehabilitation milestone	Milestone criteria
RM1(Ford Rd) (GCQ) (RCH)	Infrastructure decommissioning and removal	a) all services that are not required to support the post mining land use have been disconnected and removed; b) all concrete, bitumen and gravel (excluding roads to be retained) removed; c) all fencing that is not part of the post mining land use is removed; d) all buildings that are not part of the post mining land use demolished and/or removed; e) all machinery and equipment removed; f) all surface water drainage infrastructure that is not retained in the final landform removed; and g) all waste removed.
RM2(Ford Rd) (GCQ) (RCH)	Roads and Access Tracks	a) Retain for ongoing beneficial use.
RM3 (GCQ) (RCH)	Contaminated land identification, remediation and removal	a) Contaminated land assessment undertaken by an appropriately qualified person (AQP) indicates that no contamination unsuitable for the post-mining land use remains or is occurring. b) Contaminated material either: ○ remediated in-situ¹ or ○ removed/transported to an approved landfill for disposal. and ○ waste tracking information recorded and submitted.
RM4(Ford Rd) (GCQ)	Landform development and reshaping/reprofiling (Native Ecosystem)	a) General reshaping and pushing/trimming achieves a final landform with maximum slopes of 20°- 27° with a factor of safety greater than 1.5 b) Backfill as required with onsite materials, or imported clean earth verified in accordance with Ecological Investigation Level(EIL) / Ecological Screening Level (ESL) guideline values under the National Environment Protection (Assessment of Site Contamination) Measure (NEPM). c) All temporary and permanent erosion and sediment control structures (such as sediment control socks, hydro-mulching, and open weave jute

		matting) have been designed and installed with reference to Best Practice Erosion and Sediment Control series .
RM5(GCQ)	Landform development and reshaping/reprofiling (Rural Residential)	a) General reshaping and pushing/trimming achieves a final landform with maximum slopes of 20° - 27° with a factor of safety greater than 1.5 b) Backfill as required with onsite materials, or imported clean earth verified in accordance with Health Investigation Level (HIL) guideline values under NEPM. c) All temporary and permanent erosion and sediment control structures have been designed and installed with reference to Best Practice Erosion and Sediment Control series
RM6(RCH)	Landform development and reshaping/reprofiling (Industrial)	a) Finalise engineering and design plans. b) Batter slopes as per engineered designs and achieve a maximum of 20° - 27° with a factor of safety greater than 1.5. c) Backfilling, where required, is carried out under Level 1 or Level 2 geotechnical supervision and testing confirms that the landform has been backfilled in accordance with AS 3798-2007 Guidelines on earthworks for commercial and residential developments (Standards Australia 2007, or most recent edition). d) Materials imported for backfilling must be clean earth capable of satisfying HIL D – commercial industrial premises of NEPM.
RM7(Ford Rd) (GCQ)	Landform development and reshaping/reprofiling (Wetland Ecosystem)	a) General reshaping and pushing/trimming to achieve final landform. b) Batter slopes are to be no greater than 1 (H): 4 (V). c) Erosion and sediment control systems installed on slopes of more than 30% such as sediment control socks, hydro-mulching, and open weave jute matting.
RM8(Ford Rd) (GCQ) (RCH corner) (RCH)	Surface preparation	a) Topsoil applied over to thickness greater than 150 mm across all vegetated areas. b) Prior to application of topsoil, remediate any erosion. c) Trim, rock rake and deep rip. d) An assessment of soil health and suitability has been completed by an appropriately qualified person has been undertaken and ameliorants have been applied in accordance with recommendations from the assessment.

		e) Apply mulch (unless hydroseeding or hydromulching)
RM9 (Ford Rd) (GCQ) (RCH corner)	Revegetation (Native Ecosystem)	a) Assisted natural regeneration supported by hydroseeding b) Hydroseeding with a composition mixture that is representative of the pre clear RE as detailed in Table 1. c) All tubestock should be healthy and displaying signs of active growth, a minimum of 20 cm tall and comprise a species composition representative of pre-clear as detailed in Table 1 d) Weeds controlled to reduce competition. e) Install fencing to exclude access, if required.
RM10(GCQ)	Revegetation (Rural Residential)	a) Complete seeding using a seed mix comprising species in Table 2 b) Seeding at a rate of 1 kg to 4 kg / ha. c) Weeds controlled to reduce competition. d) Install fencing to exclude access if required.
RM11(Ford Rd) (GCQ) (RCH corner)	Revegetation (Wetland Ecosystem)	a) Assisted revegetation in the form of hydroseeding comprising species in Table 3. b) Planting at a rate of 6-10 plants per m ² along water edge. c) Areas where seeding achieves a strike rate of Minimum <60% are reseeded. d) Weeds controlled to reduce competition. e) Install fencing to exclude access if required.
RM12(Ford Rd) (GCQ) (RCH corner)	Achievement of surface requirements (Native Ecosystem)	a) Monitoring to determine whether vegetation is self-sustaining. b) Monitoring to determine that species composition is consistent with RE specified in Table 1. c) Assemble/disassemble fencing if required. d) Monitor macropod grazing and install tree guards, if required. e) 70% ground cover of species in Table 1 No active rill or gully erosion development throughout landform. f) Soil testing indicates the following parameters are met: - Rootzone EC <0.15 mS/cm, - Soil pH <9 and >6 as measured at any part of the root zone, - Exchangeable Sodium Percentage (ESP%) <5% (at 0-10 cm depth).

RM13(GCQ)	Achievement of surface requirements (Rural Residential)	a) Monitoring to determine whether vegetation is self-sustaining. b) Monitoring to determine that species composition is adequate and represents species composition in Table 2. c) Assemble fencing if required. d) 70% ground cover of species in Table 2 e) No active rill or gully development throughout landform
RM14(RCH)	Achievement of surface requirements (Industrial)	a) Monitoring to determine whether landform is geotechnically stable. b) Certification from an AQP that the landform is geotechnically stable and achieved a factor of safety 1.5. c) Minimum 70% groundcover is achieved (through revegetation with grass species, other agreed engineered solution, or combination of both).
RM15 (Ford Rd) (GCQ) (RCH corner)	Achievement of surface requirements (Wetland Ecosystem)	a) Monitoring to determine whether vegetation is self-sustaining by demonstrating that species used in RM11 remain present and show signs of new growth and recruitment. b) Monitoring to determine that species composition is consistent with Table 3. c) Minimum 60% groundcover is achieved and areas where seeding achieves a strike rate of <60% are reseeded. d) Assemble/disassemble fencing if required. e) No active rill or gully development throughout landform.
RM16(Ford Rd) (GCQ) (RCH corner)	Achievement of post-mining land use to stable condition (Native Ecosystem)	a) No rill or gully erosion evident. b) Species composition consistent with pre-clear Regional Ecosystems (REs) as mapped for each RA as detailed in Table 1. c) Criteria are achieved as per revegetation assessment shown in Table 4. d) Minimum 70% groundcover to be achieved in line with Table 4. and areas which are located within a disturbed catchment have achieved a groundcover of >80%. e) Mortality rate of mature trees less than the recruitment rate of new trees f) <10% groundcover comprised of weed speciesIf deemed necessary by an AQP, a site investigation report (including a site suitability statement) is prepared and submitted by an AQP to the administering authority in accordance with the provisions of Chapter 7, Part 8 of the EP Act.

		g) Water quality results monitored monthly at, but not limited to, downstream locations specified in Table 5, must achieves criteria specified in Table 6, for a period of 5 years. h) If the surface water quality exceeds criteria g), the applicable upstream site must be compared to the downstream site result; and quality measured at a downstream site must be equal to or less than the quality measured at the applicable upstream site. i) Soil testing indicates the following parameters are met: i. Rootzone EC <0.15 mS/cm, ii. Soil pH <9 and >6 as measured at any part of the root zone, iii. Exchangeable Sodium Percentage (ESP%) <5% (at 0-10 cm depth
RM17(GCQ)	Achievement of post-mining land use to stable condition (Rural Residential)	a) No rill or gully erosion evident. b) Grass species are comparable in composition and density to the species detailed in Table 2. c) >70% groundcover to be achieved. d) <10% groundcover comprised of weed species e) If deemed necessary by an AQP, a site investigation report (including a site suitability statement) is prepared and submitted by an AQP to the administering authority in accordance with the provisions of Chapter 7, Part 8 of the EP Act. f) Water quality results monitored monthly at, but not limited to, downstream locations specified in Table 4, must achieves criteria specified in Table 5, for a minimum period of 5 years. g) If the surface water quality exceeds criteria f), the applicable upstream site must be compared to the downstream site result; and quality measured at a downstream site must be equal to or less than the quality measured at the applicable upstream site. h) Soil testing indicates the following parameters are met: i. Rootzone EC <0.15 mS/cm, ii. Soil pH <9 and >6 as measured at any part of the root zone, iii. Exchangeable Sodium Percentage (ESP%) <5% (at 0-10 cm depth

RM18 (Ford Rd) (GCQ) (RCH corner)	Achievement of post-mining land use to stable condition (Wetland Ecosystem)	a) No rill or gully erosion evident. b) If deemed necessary by an AQP, a site investigation report (including a site suitability statement) is prepared and submitted by an AQP to the administering authority in accordance with the provisions of Chapter 7, Part 8 of the EP Act. c) Water quality results monitored monthly must achieves criteria specified in Table 5, for a minimum period of 5 years. d) Species composition and density of fringing vegetation aligns with wetland indicator plants of Southeast Queensland (SEQ) bioregion as detailed in Table 3. e) Wetland provides for habitat features to support aquatic and terrestrial fauna species recorded in historical site-specific survey. f) <10% groundcover comprised of weed species. g) Soil testing indicates the following parameters are met: i. Rootzone EC <0.15 mS/cm, ii. Soil pH <9 and >6 as measured at any part of the root zone, iii. Exchangeable Sodium Percentage (ESP%) <5% (at 0-10 cm depth).
RM19(RCH)	Achievement of post-mining land use to stable condition (Industrial)	a) Where disturbed land will remain post-surrender subject to ongoing civil works for an industrial end use: i. Development Permits -Operational Works (or equivalent) in effect and acted upon and; ii. Stormwater, erosion and sediment controls implemented in accordance with conditions of the development permits and; iii. Earthworks undertaken with supervision of AQP. b) If deemed necessary by an AQP, a site investigation report (including a site suitability statement) is prepared and submitted by an AQP to the administering authority in accordance with the provisions of Chapter 7, Part 8 of the EP Act. c) Water quality results monitored monthly at, but not limited to, downstream locations specified in Table 4, must achieves criteria specified in Table 6, for a minimum period of 5 years. d) If the surface water quality exceeds criteria c), the applicable upstream site must be compared to the downstream site result; and quality

		measured at a downstream site must be equal to or less than the quality measured at the applicable upstream site.
--	--	---

Table 1 - Native Ecosystem Revegetation Species Mix

RA	Stratum	Species	Corresponding RE
RA 1	Canopy/	<i>Acacia amblygona</i>	RE 12.9-10.19a/ 12.9-10.4
RA 2	Sub-canopy/	<i>Acacia blakei</i>	
RA 3	shrub layer	<i>Acacia falcata</i>	
RA 4		<i>Acacia flavescens</i>	
		<i>Acacia ixiophylla</i>	
		<i>Acacia loroloba</i>	
		<i>Acacia ulicifolia</i>	
		<i>Acacia woodsia</i>	
		<i>Corymbia citriodora</i>	
		<i>Corymbia henryi</i>	
		<i>Dodonaea triquetra</i>	
		<i>Eucalyptus carnea</i>	
		<i>Eucalyptus fibrosa</i>	
		<i>Eucalyptus microcorys</i>	
		<i>Eucalyptus portunensis</i>	
		<i>Eucalyptus racemosa</i>	
		<i>Eucalyptus tindaliae</i>	
		<i>Leptospermum polygalifolium</i>	
		<i>Pultenaea villosa</i>	
		<i>Eucalyptus fibrosa</i> subsp. <i>fibrosa</i>	
		<i>Corymbia intermedia</i>	
		<i>Eucalyptus acmenoides</i>	
		<i>Angophora leiocarpa</i>	
		<i>Eucalyptus major</i>	
		<i>Eucalyptus moluccana</i>	
		<i>Lophostemon confertus</i>	
		<i>Allocasuarina littoralis</i>	

		<i>Alphitonia excelsa</i>	
		<i>Acacia disparrima subsp. disparrima</i>	
		<i>Acacia leiocalyx subsp. leiocalyx</i>	
		<i>Acacia concurrens</i>	
	Ground layer	<i>Aristida queenslandica</i>	
		<i>Eragrostis brownii</i>	
		<i>Fimbristylis dichotoma</i>	
		<i>Gahnia aspera</i>	
		<i>Gahnia aspera</i>	
		<i>Hardenbergia violacea</i>	
		<i>Imperata cylindrica</i>	
		<i>Indigofera australis</i>	
		<i>Lomandra filiformis</i>	
		<i>Lomandra multiflora</i>	
		<i>Panicum effusum</i>	
		<i>Paspalidium distans</i>	
		<i>Entolasia stricta</i>	
		<i>Scleria sphacelata</i>	
		<i>Lomandra longifolia</i>	
		<i>Themeda triandra</i>	
		<i>Lepidosperma laterale</i>	
		<i>Cymbopogon refractus</i>	
		<i>Dianella caerulea</i>	
		<i>Cyanthillium cinereum</i>	
RA8	Canopy/ Sub-canopy/ shrub layer	<i>Eucalyptus pilularis</i>	RE 12.11.23
		<i>Corymbia intermedia</i>	
		<i>Eucalyptus tindaliae</i>	
		<i>Angophora woodsiana</i>	
		<i>Corymbia gummifera</i>	
		<i>Eucalyptus microcorys</i>	

		<i>Eucalyptus resinifera</i>	
		<i>Lophostemon confertus</i>	
		<i>Eucalyptus propinqua</i>	
		<i>Eucalyptus siderophloia</i>	
		<i>Acacia disparrima</i> subsp. <i>disparrima</i>	
		<i>Acacia concurrens</i>	
		<i>Allocasuarina littoralis</i>	
		<i>Alphitonia excelsa</i>	
		<i>Syncarpia glomulifera</i>	
		<i>Dodonaea triquetra</i>	
		<i>Elaeocarpus reticulatus</i>	
		<i>Glochidion sumatranum</i>	
	Ground layer	<i>Hovea acutifolia</i>	
		<i>Themeda triandra</i>	
		<i>Entolasia stricta</i>	
		<i>Imperata cylindrica</i>	
		<i>Lepidosperma laterale</i>	
		<i>Cymbopogon refractus</i>	
		<i>Digitaria parviflora</i>	
		<i>Eragrostis brownii</i>	
		<i>Oplismenus aemulus</i>	
		<i>Ottochloa gracillima</i>	
		<i>Paspalidium distans</i>	
		<i>Dianella caerulea</i>	
		<i>Lomandra longifolia</i>	
		<i>Lomandra multiflora</i> subsp. <i>Multiflora</i>	
RA12	Canopy/ Sub-canopy/ shrub layer	<i>Acacia concurrens</i>	RE 12.9-10.17d
		<i>Acacia falcata</i>	
		<i>Acacia melanoxydon</i>	
		<i>Acacia ulicifolia</i>	

	<i>Banksia spinulosa</i>	
	<i>Bursaria spinosa</i>	
	<i>Cassinia laevis</i>	
	<i>Eucalyptus fibrosa</i>	
	<i>Eucalyptus Major</i>	
	<i>Eucalyptus moluccana</i>	
	<i>Eucalyptus tereticornis</i>	
	<i>Eustrephus latifolius</i>	
	<i>Hovea acutifolia</i>	
	<i>Jacksonia scoparia</i>	
	<i>Melaleuca salicina</i>	
	<i>Pittosporum angustifolium</i>	
	<i>Pultenea villosa</i>	
	<i>Corymbia intermedia</i>	
	<i>Lophostemon confertus</i>	
	<i>Eucalyptus microcorys</i>	
	<i>Eucalyptus propinqua</i>	
	<i>Eucalyptus siderophloia</i>	
	<i>Corymbia trachyphloia subsp. trachyphloia</i>	
	<i>Eucalyptus grandis</i>	
	<i>Allocasuarina torulosa</i>	
	<i>Allocasuarina littoralis</i>	
	<i>Acacia leiocalyx</i>	
	<i>Eucalyptus propinqua</i>	
	<i>Acacia disparrima subsp. Disparrima</i>	
	<i>Alphitonia excelsa</i>	
	<i>Breynia oblongifolia</i>	
	<i>Dodonaea triquetra</i>	
	<i>Glochidion ferdinandi</i>	
	<i>Glochidion sumatranum</i>	

	Ground layer	<i>Themeda triandra</i>	
		<i>Imperata cylindrica</i>	
		<i>Lomandra confertifolia</i> subsp. <i>pallida</i>	
		<i>Lomandra multiflora</i> subsp. <i>multiflora</i>	
		<i>Dianella caerulea</i>	
		<i>Cymbopogon refractus</i>	
		<i>Lomandra longifolia</i>	
		<i>Gahnia aspera</i>	

Table 2 – Rural Residential Revegetation species list

Scientific Name	Common Name	Rate
Brachiaria spp. Hybrids	Brachi hybrid; Brachiaria hybrid	<1 kg to 4 kg / ha
<i>Paspalum nicorae</i>	Brunswick grass	
<i>Pennisetum clandestinum</i>	Kikuyu	
<i>Panicum maximum</i>	Panics	
<i>Bromus willdenowii</i>	Prairie grass	
<i>Festuca arundinacea</i> Schreb.	Tall fescue	
<i>Imperata cylindrica</i>	Bladey Grass	
<i>Panicum effusum</i>	Panic grass	
<i>Cymbopogon refractus</i>	Barbed wire grass	
<i>Eragrostis brownie</i>	Browns lovegrass	
<i>Fimbristylis dichotoma</i>	Eight day grass	
<i>Entolasia stricta</i>	Wiry panic	

Table 3 - Wetland Revegetation species list

Scientific Name	Wetland Indicator Plants (SEQ)	RE 12.3.6 (preclear riparian RE)	Bioretention plant species (Healthy waterways)
<i>Juncus kraussii</i>	Yes	Yes	Yes
<i>Fimbristylis polytrichoides</i>	Yes		
<i>Juncus kraussii</i>	Yes		Yes
<i>Eleocharis dulcis</i>	Yes		
<i>Phragmites australis</i>	Yes		
<i>Persicaria decipiens</i>	Yes		
<i>Philydrum lanuginosum</i>	Yes		
<i>Cyperus gunnii</i>	Yes		Yes
<i>Carex pumila</i>	Yes		Yes
<i>Carex fascicularis</i>	Yes		Yes
<i>Cyperus difformis</i>		Yes	
<i>Cyperus haspan</i>		Yes	
<i>Cyperus pilosus</i>		Yes	

<i>Eleocharis acuta</i>		Yes	
<i>Carex polyantha</i>			Yes
<i>Carex appressa</i>			Yes
<i>Carex pumila</i>			Yes
<i>Fincia nodosa</i>			Yes
<i>Juncus usitatus</i>	Yes		Yes
<i>Cyperus polystachyos</i>	Yes		Yes
<i>Sacciolepis indica</i>	Yes		

Table 4 – Revegetation Assessment Criteria

RA1, RA2, RA3 and RA4	RA8	RA12
- The following criteria are achieved as per conditions for high-value regrowth/remnant vegetation (RE 12.9-10.19a/12.9-10.4) - Native tree species richness ≥ 4 - Native shrub species richness ≥ 6 $\geq 30\%$ tree canopy cover $\geq 6\%$ shrub canopy cover $\geq 11\%$ native perennial grass cover - median tree canopy height $\geq 16.8\text{m}$ - Minimum 70% groundcover to be achieved (organic litter + grass and forb cover)	- The following criteria are achieved as per conditions for high-value regrowth/remnant vegetation (RE 12.11.23) - Native tree species richness ≥ 16 - Native shrub species richness ≥ 11 $\geq 25\%$ tree canopy cover $\geq 9\%$ shrub canopy cover $\geq 6\%$ native perennial grass cover - tree canopy height $\geq 21.7\text{m}$ - Minimum 70% groundcover to be achieved (organic litter + grass and forb cover)	- The following criteria are achieved as per conditions for high-value regrowth/remnant vegetation (RE 12.9-10.17d) - Native tree species richness ≥ 8 - Native shrub species richness ≥ 11 $\geq 33\%$ tree canopy cover $\geq 3\%$ shrub canopy cover $\geq 12\%$ native perennial grass cover - Minimum 70% groundcover to be achieved.

Table 5. Water quality Monitoring locations

	Downstream Monitoring Location	Latitude	Longitude
Burbank	FRD1	TBA	TBA
	B1	-27.58044	153.14171
	DS1	TBA	TBA
	PG2	TBA	TBA
Redland Bay	RB1	-27.62981	153.27045
	RB3	-27.63296	153.26626
	Moogurrapum Ck	-27.63598	153.27374
Rochedale	R2	-27.55779	153.11124
	R	-27.55442	153.11305

Table 6 Surface water and groundwater quality milestone criteria achievement of post mining land use to stable condition.

Monitoring Locations	pH	Turbidity (NTU)	Dissolved oxygen (% sat)	Electrical conductivity (µS/cm)	WQOs
Burbank sites & Redland Bay (RB1 and Moogurrapum Ck)	6.5-8.0	20	85-110	520	Redland Creeks – Low flow lowland fresh waters moderately disturbed
Redland Bay (RB3)	6.5-8.2	10	90-110	490	Logan River Basin – Low flow Lower Creeks
Rochedale Sites	6.5-8.0	50	85-110	600	Lowland freshwater in the Brisbane River Estuary

END OF **PRCP** SCHEDULE