

Permit

Environmental Protection Act 1994 **Environmental authority EPML00586713**

This environmental authority is issued by the administering authority under Chapter 5 of the Environmental Protection Act 1994.

Environmental authority number: EPML00586713

Environmental authority takes effect on 05 August 2025

Environmental authority holder(s)

Name(s)	Registered address
ECHO QLD COAL PTY LTD	Level 32, 12 Creek Street BRISBANE QLD 4000
BOOMERANG QLD COAL PTY LTD	Level 32, 12 Creek Street BRISBANE QLD 4000

Environmentally relevant activity and location details

Environmentally relevant activity/activities	Location(s)
Schedule 3 13: Mining black coal	ML70389
Schedule 3 08: A petroleum or GHG storage activity, other than items 1 to 7, that includes an activity from Schedule 2 with an AES	PL485
Ancillary 08 - Chemical Storage 1: Storing a total of 50t or more of chemicals of dangerous goods class 1 or class 2, division 2.3 under subsection (1)(a)	ML70389, PL485
Ancillary 14 - Electricity Generation 1: Generating electricity by using gas at a rated capacity of 10MW electrical or more	ML70389, PL485
Ancillary 15 - Fuel burning Using fuel burning equipment that is capable of burning at least 500kg of fuel in an hour	ML70389, PL485
Ancillary 31 - Mineral processing 2: Processing, in a year, the following quantities of mineral products, other than coke (b) more than 100,000t	ML70389, PL485



**Queensland
Government**

Environmental authority EPML00586713 Eagle Downs Coal Mine

Environmentally relevant activity/activities	Location(s)
Ancillary 62 - Resource recovery and transfer facility operation 1: Operating a facility for receiving and sorting, dismantling, baling or temporarily storing- (d) category 1 regulated waste	ML70389, PL485
Ancillary 62 - Resource recovery and transfer facility operation 1: Operating a facility for receiving and sorting, dismantling, baling or temporarily storing- (c) category 2 regulated waste	ML70389, PL485
Ancillary 63 - Sewage Treatment 1: Operating sewage treatment works, other than no-release works, with a total daily peak design capacity of (b-i) more than 100 but not more than 1500EP if treated effluent is discharged from the works to an infiltration trench or through an irrigation scheme	ML70389, PL485
Ancillary 64 - Water treatment 2: Desalinating, in a day, the following quantity of water, allowing the release of waste to waters other than seawater (a) more than 0.5ML but not more than 5ML	ML70389, PL485

Additional information for applicantsEnvironmentally relevant activities

The description of any environmentally relevant activity (ERA) for which an environmental authority (EA) is issued is a restatement of the ERA as defined by legislation at the time the EA is issued. Where there is any inconsistency between that description of an ERA and the conditions stated by an EA as to the scale, intensity or manner of carrying out an ERA, the conditions prevail to the extent of the inconsistency.

An EA authorises the carrying out of an ERA and does not authorise any environmental harm unless a condition stated by the EA specifically authorises environmental harm.

A person carrying out an ERA must also be a registered suitable operator under the *Environmental Protection Act 1994* (EP Act).

Contaminated land

It is a requirement of the EP Act that an owner or occupier of contaminated land give written notice to the administering authority if they become aware of the following:

- the happening of an event involving a hazardous contaminant on the contaminated land (notice must be given within 24 hours); or
- a change in the condition of the contaminated land (notice must be given within 24 hours); or
- a notifiable activity (as defined in Schedule 3) having been carried out, or is being carried out, on the contaminated land (notice must be given within 20 business days)

that is causing, or is reasonably likely to cause, serious or material environmental harm.

Environmental authority EPML00586713 Eagle Downs Coal Mine

For further information, including the form for giving written notice, refer to the Queensland Government website www.qld.gov.au, using the search term 'duty to notify'.

Take effect

Please note that, in accordance with section 200 of the EP Act, an EA has effect:

- a) if the authority is for a prescribed ERA and it states that it takes effect on the day nominated by the holder of the authority in a written notice given to the administering authority – on the nominated day; or
- b) if the authority states a day or an event for it to take effect – on the stated day or when the stated event happens; or
- c) otherwise – on the day the authority is issued.

However, if the EA is authorising an activity that requires an additional authorisation (a relevant tenure for a resource activity, a development permit under the *Planning Act 2016* or an SDA Approval under the *State Development and Public Works Organisation Act 1971*), this EA will not take effect until the additional authorisation has taken effect.

If this EA takes effect when the additional authorisation takes effect, you must provide the administering authority written notice within 5 business days of receiving notification of the related additional authorisation taking effect.

The anniversary day of this environmental authority is the same day each year as the effective date. The payment of the annual fee will be due each year on this day. An annual return will be due each year on 01 April.

If you have incorrectly claimed that an additional authorisation is not required, carrying out the ERA without the additional authorisation is not legal and could result in your prosecution for providing false or misleading information or operating without a valid environmental authority.



Jessica Johnson
Department of the Environment, Tourism, Science and Innovation
Delegate of the administering authority
Environmental Protection Act 1994

Enquiries:
Business Centre Coal
Phone: 07 4987 9320
Email: CRMining@detsi.qld.gov.au

Date issued: 05 August 2025

Privacy statement

Pursuant to section 540 of the EP Act, the Department is required to maintain a register of certain documents and information authorised under the EP Act. A copy of this document will be kept on the public register. The register is available for inspection by members of the public who are able to take extracts, or copies of the documents from the register. Documents that are required to be kept on the register are published in their entirety, unless alteration is required by the EP Act. There is no general discretion allowing the Department to withhold documents or information required to be kept on the public register. For more information on the Department's public register, search 'public register' at www.qld.gov.au. For queries about privacy matters please email privacy@des.qld.gov.au or telephone 13 74 68.

Obligations under the *Environmental Protection Act 1994*

In addition to the requirements found in the conditions of this environmental authority, the holder must also meet their obligations under the EP Act, and the regulations made under the EP Act. For example, the holder must comply with the following provisions of the Act:

- general environmental duty (section 319)
- duty to notify environmental harm (section 320-320G)
- offence of causing serious or material environmental harm (sections 437-439)
- offence of causing environmental nuisance (section 440)
- offence of depositing prescribed water contaminants in waters and related matters (section 440ZG)
- offence to place contaminant where environmental harm or nuisance may be caused (section 443)

Conditions of environmental authority

Agency Interest - General	
Condition number	Condition
A1	Scope of Activity This environmental authority authorises the mining of up to 11 million tonnes of run of mine (ROM) coal per annum.
A2	Disturbance from mining activities conducted under this environmental authority must not exceed the total rehabilitation area extent contained in the PRCP P-PRCP-100812653 and must comply with the disturbance areas depicted in Figure 2 (Maximum disturbance area) .
A3	The spatial location of residual ponding is authorised to vary from that depicted in Figure 3 (Maximum disturbance area – detail) , within the limit of subsidence. The maximum disturbance area (ha) for Residual Ponding Areas must not exceed the total rehabilitation area extent (ha) for RA1 per the requirements of PRCP P-PRCP-100812653.
A4	Exploration Exploration activities outside the approved disturbance area shown in Figure 2 (Maximum disturbance area) must be conducted in accordance with the Eligibility Criteria and Standard Conditions for Exploration and Mineral Development Projects.
A5	Maintenance of measures, plant and equipment The environmental authority holder must ensure: (a) that all measures, plant and equipment necessary to ensure compliance with the conditions of this environmental authority are installed; (b) that such measures, plant and equipment are maintained in a proper condition; and (c) that such measures, plant and equipment are operated in a proper manner.
A6	Monitoring and records Record, compile and keep for a minimum of five years all monitoring results required by this environmental authority and make available for inspection all or any of these records upon request by the administering authority.
A7	Where monitoring is a requirement of this environmental authority, ensure that a competent person(s) conducts all monitoring.
A8	Notification of emergencies, incidents and exceptions The holder of this environmental authority must notify the administering authority by written notification within Twenty-four (24) hours , after becoming aware of any emergency or incident which results in the release of contaminants not in accordance, or reasonably expected to be not in accordance with the conditions of this environmental authority.

Environmental authority EPML00586713 Eagle Downs Coal Mine

A9	Within ten (10) business days following the initial notification of an emergency or incident, or receipt of monitoring results, whichever is the latter, further written advice must be provided to the administering authority, including the following: (a) Results and interpretation of any samples taken and analysed; (b) Outcomes of actions taken at the time to prevent or minimise unlawful environmental harm; (c) Proposed actions to prevent a recurrent of the emergency or incident.
A10	Complaints The environmental authority holder must record all environmental complaints received about the mining activities including: (a) Name, address and contact number of the complainant; (b) Time and date of complaint; (c) Reasons for the complaint; (d) Investigations undertaken; (e) Conclusions formed; (f) Actions taken to resolve the complaint; (g) Any abatement measures implemented; and (h) Person responsible for resolving the complaint.
A11	The environmental authority holder must, when requested by the administering authority, undertake relevant specified monitoring within a reasonable timeframe nominated or agreed to by the administering authority to investigate any complaint of environmental harm. The results of the investigation (including an analysis and interpretation of the monitoring results) and abatement measures, where implemented, must be provided to the administering authority within ten (10) business days of completion of the investigation, or no later than ten (10) business days after the end of the timeframe nominated by the administering authority to undertake the investigation.
A12	Recommendation of production activities Prior to the recommencement of production activities, the environmental authority holder must provide the administering authority with written notice of its intention to recommence production activities under this environmental authority.

Environmental authority EPML00586713 Eagle Downs Coal Mine

Agency Interest – Air	
Condition number	Condition
B1	Dust nuisance Subject to conditions B2 and B3 the release of dust or particulate matter or both resulting from the mining activity must not cause an environmental nuisance, at any sensitive or commercial place.
B2	When requested by the administering authority, dust and particulate monitoring must be undertaken within a reasonable and practicable timeframe nominated by the administering authority to investigate any complaint (which is neither frivolous nor vexatious nor based on mistaken belief in the opinion of the authorised officer) of environmental nuisance at any sensitive or commercial place, and the results must be notified within fourteen (14) days to the administering authority following completion of monitoring.
B3	If the environmental authority holder can provide evidence through monitoring that the following limits are not being exceeded then the holder is not in breach of condition B1: (a) dust deposition of 120 milligrams per square metre per day, averaged over one month, when monitored in accordance with AS 3580.10.1 <i>Methods for sampling and analysis of ambient air – Determination of particulates – Deposited matter – Gravimetric method of 2003</i> (or more recent editions); or (b) a concentration of particulate matter with an aerodynamic diameter of less than ten (10) micrometre (µm) (PM₁₀) suspended in the atmosphere of 50 micrograms per cubic metre over a twenty-four (24) hour averaging time, (can be exceeded no more than five (5) times per year) at a sensitive or commercial place downwind of the operational land, when monitored in accordance with: (i) particulate matter – Determination of suspended particulate PM₁₀ high-volume sampler with size-selective inlet – Gravimetric method, when monitored in accordance with AS 3580.9.6 of 2003 (or more recent editions) <i>Ambient air – particulate matter – Determination of suspended particulate PM₁₀ high volume sampler with size-selective inlet – Gravimetric method</i>; and (ii) any alternative method of sampling PM₁₀, which may be permitted by the <i>Air Quality Sampling Manual</i> as published from time to time by the administering authority.
B4	If monitoring indicates exceedance of the relevant limits in condition B3, then the environmental authority holder must: (a) address the complaint including the use of appropriate dispute resolution if required; and (b) immediately implement dust abatement measures so that emissions of dust from the activity do not result in further environmental nuisance.
B5	Odour nuisance The release of noxious or offensive odour(s) or any other noxious or offensive airborne contaminant(s) resulting from the mining activity must not cause an environmental nuisance at any nuisance sensitive or commercial place.
B6	When requested by the administering authority, odour monitoring must be undertaken within a reasonable and practicable timeframe nominated by the administering authority to investigate any complaint (which is neither frivolous nor vexatious nor based on mistaken belief in the opinion of the authorised officer) of environmental nuisance at any sensitive or commercial place, and the results must be notified within fourteen (14) days to the administering authority following completion of monitoring.

Environmental authority EPML00586713 Eagle Downs Coal Mine

B7	If the administering authority determines the odour released to constitute an environmental nuisance, in accordance with the latest version of the administering authority's guideline <i>Odour Impact Assessment from Developments</i> (2004), then the environmental authority holder must: (a) address the complaint including the use of appropriate dispute resolution if required; and (b) immediately implement odour abatement measures so that emissions of odour from the activity does not result in further environmental nuisance.
-----------	--

Environmental authority EPML00586713 Eagle Downs Coal Mine

Agency Interest – Water	
Condition number	Condition
C1	Contaminant release Contaminants must not be released to the environment except as permitted under the conditions of this environmental authority.
C2	The environmental authority holder must provide written confirmation of, and with reasonable information to support the TBCs listed in the following tables to the administering authority at least three (3) months prior to the recommencement of production activities: (a) Table C2 (Mine affected water release limits); (b) Table C4 (Mine affected water release during flow events); and (c) Table C9 (Receiving waters contaminant trigger levels).
C3	The release of mine affected water to waters must only occur from the release points specified in Table C1 (Mine affected water release points, sources and receiving waters) and depicted in Figure 1 (Surface Water Release Points and Groundwater Monitoring Locations) attached to this environmental authority.
C4	The release of mine affected water to internal water management infrastructure installed and operated in accordance with a water management plan that complies with condition C36 is permitted.
C5	The release of mine affected water to waters in accordance with condition C3 must not exceed the release limits stated in Table C2 (Mine affected water release limits) when measured at the monitoring points specified in Table C1 (Mine affected water release points, sources and receiving waters) for each quality characteristic.

Table C1 (Mine affected water release points, sources and receiving waters)

Release point (RP)	Latitude	Longitude	Contaminant source and location	Monitoring point	Receiving waters
RP 1 – DREA Catch Dam	TBC*	TBC*	DREA runoff	Spillway	Ripplestone Creek (Eastern Tributary)
RP 2 – Mine Water Dam	TBC*	TBC*	Dam water	Spillway	Ripplestone Creek (Eastern Tributary)
RP 3 – DM901a Sediment Dam	-22.19185	148.20969	DREA runoff	Spillway	Ripplestone Creek (Eastern Tributary)

Note: *To be updated in accordance with condition C17.

C6	The release of mine affected water to waters must be monitored at the locations specified in Table C1 (Mine affected water release points, sources and receiving waters) for each quality characteristic and at the frequency specified in Table C2 (Mine affected water release limits) and Table C3 (Mine affected water trigger investigation levels) .
-----------	---

Table C2 (Mine affected water release limits)

Quality characteristic	Release limits	Monitoring frequency
Electrical conductivity ($\mu\text{S}/\text{cm}$)	Release limits specified in Table C4 for variable flow criteria	Daily during release
pH (pH Unit)	6.5 (minimum) 9.0 (maximum)	Daily during release
Turbidity (NTU)	TBC*	Daily during release
Suspended solids (mg/L)	TBC*	Daily during release
Sulphate (SO_4^{2-}) (mg/L)	1000	Daily during release
Calcium** (Ca) (mg/L)	5 (minimum)	Daily during release

Note: *To be updated in accordance with condition C2.

Note: ** Only applicable when releasing any RO product water

Environmental authority EPML00586713 Eagle Downs Coal Mine

Table C3 (Mine affected water trigger investigation levels)

Quality characteristic	Trigger levels (µg/L)	Comment on trigger level	Monitoring frequency
Aluminium	55	<i>For aquatic ecosystem protection, based on SMD guideline</i>	Commencement of release and thereafter weekly during release
Arsenic	13	<i>For aquatic ecosystem protection, based on SMD guideline</i>	
Cadmium	0.2	<i>For aquatic ecosystem protection, based on SMD guideline</i>	
Chromium	1.0	<i>For aquatic ecosystem protection, based on SMD guideline</i>	
Copper	2.0	<i>For aquatic ecosystem protection, based on LOR for ICPMS</i>	
Iron	300	<i>For aquatic ecosystem protection, based on low reliability guideline</i>	
Lead	10	<i>For aquatic ecosystem protection, based on SMD guideline</i>	
Mercury	0.2	<i>For aquatic ecosystem protection, based on LOR for CV FIMS</i>	
Nickel	11	<i>For aquatic ecosystem protection, based on SMD guideline</i>	
Zinc	8.0	<i>For aquatic ecosystem protection, based on SMD guideline</i>	
Boron	370	<i>For aquatic ecosystem protection, based on SMD guideline</i>	
Cobalt	90	<i>For aquatic ecosystem protection, based on low reliability guideline</i>	
Manganese	1900	<i>For aquatic ecosystem protection, based on SMD guideline</i>	
Molybdenum	34	<i>For aquatic ecosystem protection, based on low reliability guideline</i>	
Selenium	10	<i>For aquatic ecosystem protection, based on LOR for ICPMS</i>	
Silver	1.0	<i>For aquatic ecosystem protection, based on LOR for ICPMS</i>	
Uranium	1.0	<i>For aquatic ecosystem protection, based on LOR for ICPMS</i>	
Vanadium	10	<i>For aquatic ecosystem protection, based on LOR for ICPMS</i>	
Ammonia	900	<i>For aquatic ecosystem protection, based on SMD guideline</i>	
Nitrate	1100	<i>For aquatic ecosystem protection, based on ambient Qld WQ Guidelines (2006) for TN</i>	
Petroleum hydrocarbons (C6-C9)	20		
Petroleum hydrocarbons (C10-C36)	100		
Fluoride (total)	2000	<i>Protection of livestock and short term irrigation guideline</i>	

Note: All metals and metalloids must be measured as total (unfiltered) and dissolved (filtered). Trigger levels for metal/metalloids apply if dissolved results exceed trigger.

Environmental authority EPML00586713 Eagle Downs Coal Mine

C7	If quality characteristics of the release exceed any of the trigger levels specified in Table C3 (Mine affected water trigger investigation levels) during a release event, the environmental authority holder must compare the downstream results in the receiving waters to the trigger values specified in Table C3 (Mine affected water trigger investigation levels) and: (a) where the trigger values are not exceeded then no action is to be taken; (b) where the downstream results exceed the trigger values specified in Table C3 (Mine affected water trigger investigation levels) for any quality characteristic, compare the results of the downstream site to the data from background monitoring sites; and (i) if the result is less than the background monitoring site data, then no action is to be taken; or (ii) if the result is greater than the background monitoring site data, complete an investigation into the potential for environmental harm and provide a written report to the administering authority via WaTERS within 90 days of receiving the result, outlining: (1) details of the investigations carried out; and (2) actions taken to prevent environmental harm.
C8	If an exceedance in accordance with condition C7(b)(ii) is identified, the holder of the authority must notify the administering authority in writing via WaTERS within 24 hours of receiving the result.
C9	Contaminant release events The holder must install, operate and maintain a stream flow gauging station to determine and record stream flows downstream of the release point locations as specified in Table C4 (Mine affected water release during flow events).

Table C4 (Mine affected water release during flow events)

Receiving waters/ streams	Release point (RP)	Gauging station	Latitude	Longitude	Receiving water flow recording frequency	Receiving water flow criteria for discharge (m ³ /s)	Maximum release rate (for all combined RP flows)	Electrical conductivity release limits
Ripplestone Creek (Eastern Tributary)	RP1 RP2 RP3	Gauging Station 1	TBC*	TBC*	Continuous (minimum daily)	TBC*	TBC*	TBC*

Note: *To be updated in accordance with condition C2.

Environmental authority EPML00586713 Eagle Downs Coal Mine

C10	The release of mine affected water to waters in accordance with condition C3 must only take place during periods of natural flow in accordance with the receiving water flow criteria for discharge specified in Table C4 (Mine affected water release during flow events) for the release point(s) specified in Table C1 (Mine affected water release points, sources and receiving waters) .
C11	The flow rate for the release of mine affected water to receiving waters in accordance with condition C3 must not exceed 20% of the receiving water flow rate.
C12	During a release event, the daily quantity of mine affected water released from each release point must be measured and recorded at the monitoring points in Table C1 (Mine affected water release points, sources and receiving waters) and provided to the administering authority on request.
C13	Releases to waters must be undertaken so as not to: (a) cause erosion of the bed and banks of the receiving waters; (b) cause a material build-up of sediment in the receiving waters; and (c) occur during no flow conditions.
C14	Brine produced by the ROWTP must: (a) be stored within the Brine Dam specified in Table C5 (Reverse osmosis brine waste product storage); and (b) not be released to land or waters.
C15	Brine produced by the ROWTP must be removed and transported from the licensed place: (a) by a person who holds a current authority to transport such wastes; and (b) to a facility that is lawfully able to accept the waste.
C16	The Brine Dam must: (a) be fully lined with a polyethylene liner; and (b) maintain and operate a freeboard of at least one (1) metre below the spillway level.
C17	The environmental authority holder must provide written confirmation of the TBCs listed in the following tables with supporting information to the administering authority within two (2) months following the completion of design reports for the relevant structures: (a) Table C1 (Mine affected water release points, sources and receiving waters); (b) Table C5 (Reverse osmosis brine waste product storage); and (c) Table C6 (Water storage monitoring).

Table C5 (Reverse osmosis brine waste product storage)

Water storage description	Latitude	Longitude
Brine Dam	TBC*	TBC*

Note: *To be updated in accordance with condition C17.

Environmental authority EPML00586713 Eagle Downs Coal Mine

C18	Notification of release event The environmental authority holder must notify the administering authority via WaTERS within twenty-four (24) hours after commencing to release mine affected water to the receiving environment. Notification must include the submission of written advice to the administering authority of the following information: (a) release commencement date/time; (b) details regarding the compliance of the release with the conditions of Agency Interest: Water of this environmental authority (that is, contaminant limits, natural flow, discharge volume); (c) expected release cessation date and time; (d) release point/s; (e) release rate; (f) release volume (estimate); (g) available release water quality results for monitoring conducted under condition C6; (h) release salinity; and (i) receiving water/s including the natural flow rate. <i>Note: Successive or intermittent releases occurring within 24 hours of the cessation of any individual release can be considered part of a single <u>release event</u> and do not require individual notification for the purpose of compliance with this condition provided the relevant details of the release are included within the notification provided.</i>
C19	The environmental authority holder must notify the administering authority, via WaTERS, as soon as practicable and within twenty-four (24) hours after cessation of a release notified under Condition C18. Note: Successive or intermittent releases occurring within twenty-four (24) hours of the cessation of any individual release can be considered part of a single release event and do not require individual notification for the purpose of compliance with Conditions C18, C19 and C20, provided the relevant details of the release are included within the notification provided in accordance with Conditions C18, C19 and C20.
C20	The holder of this environmental authority must within twenty-eight (28) days after cessation of a release event notified under Condition C18 provide a report to the administering authority via WaTERS, which must include the following information: (a) release cessation date/time; (b) release points; (c) release rates; (d) available release water quality results for monitoring conducted under condition C6; (e) total volume of water released; (f) natural flow rate in the receiving water; and (g) details regarding the compliance of the release with the conditions of Agency Interest – Water of this environmental authority. (h) all continuous and in-situ water quality monitoring results (including laboratory analyses); and (i) any further matters pertinent to the water release event.

Environmental authority EPML00586713 Eagle Downs Coal Mine

C21	Notification of release event exceedance If the release limits defined in Table C2 (Mine affected water release limits) are exceeded, the environmental authority holder must notify the administering authority via WaTERS within twenty-four (24) hours of receiving the results.
C22	The environmental authority holder must, within twenty-eight (28) days of a release that is not compliant with the conditions of this authority, provide a report to the administering authority via WaTERS detailing: (a) the reason for the release; (b) the location of the release; (c) the volume of the water released and which (if any) part of this volume was non-compliant; (d) the total duration of the release and which (if any) part of this period was non-compliant; (e) the quality of the water released for all parameters monitored in accordance with this environmental authority; (f) the quality of water in the receiving environment for any parameters recorded during the release; (g) the cause of the exceedance; and (h) any other matters pertinent to the water release event.
C23	Monitoring of water storage quality Water storages stated in Table C6 (Water storage monitoring) which are associated with the release points must be monitored for the water quality characteristics specified in Table C7 (Onsite water storage contaminant limits) at the monitoring locations and at the monitoring frequency specified in Table C6 (Water storage monitoring) .

Table C6 (Water storage monitoring)

Water storage description	Latitude	Longitude	Monitoring location	Monitoring frequency
Catch Dam	TBC*	TBC*	TBC*	Quarterly
Mine Water Dam	TBC*	TBC*	TBC*	Quarterly
DM901a Sediment Dam	-22.19185	148.20969	Spillway	Quarterly

*To be updated in accordance with condition C17.

Table C7 (Onsite water storage contaminant limits)

Quality characteristic	Test value	Contaminant limit
pH (pH unit)	Range	Greater than 4, less than 9
EC (µS/cm)	Maximum	5970
Sulphate (mg/L)	Maximum	1000
Fluoride (mg/L)	Maximum	2.0
Aluminium (mg/L)	Maximum	5.0
Arsenic (mg/L)	Maximum	0.5
Cadmium (mg/L)	Maximum	0.01
Cobalt (mg/L)	Maximum	1.0
Copper (mg/L)	Maximum	1.0
Lead (mg/L)	Maximum	0.1
Nickel (mg/L)	Maximum	1.0
Zinc (mg/L)	Maximum	20

Note: Total measurements (unfiltered) must be sampled and analysed.

C24	In the event that water storages defined in Table C6 (Water storage monitoring) exceed the contaminant limits defined in Table C7 (Onsite water storage contaminant limits) , the environmental authority holder must implement measures, where practicable, to prevent access to waters by all livestock.
C25	Receiving environment monitoring and contaminant trigger levels The quality of the receiving waters must be monitored at the locations specified in Table C8 (Receiving water upstream background sites and downstream monitoring points) for each quality characteristic and at the monitoring frequency stated in Table C9 (Receiving waters contaminant trigger levels).

Environmental authority EPML00586713 Eagle Downs Coal Mine

Table C8 (Receiving water upstream background sites and downstream monitoring points)

Monitoring points	Receiving waters location description	Latitude	Longitude
Upstream background monitoring points			
Monitoring point 3	The most downstream Ripstone Creek location (MP3), where the upper Ripstone Creek tributary flows from Peak Downs Mine.	-22.245066	148.242067
Monitoring point 4	Upstream Ripplestone Creek (Western Tributary) MP4 at a pooling area which should be suitable for safe access for water sampling and Macroinvertebrate sampling.	-22.215094	148.215969
Downstream monitoring points			
Monitoring point 1	Upstream Ripplestone Creek (Western Tributary) MP1, the Eastern Tributary immediately upstream off the Winchester Road.	-22.215395	148.248985
Monitoring point 2	Downstream Ripstone Creek	-22.244427	148.261701
Monitoring point 7	Downstream Ripstone Creek	-22.244231	148.277524

Notes:

- a) The upstream monitoring point should be within 5km of the release point.
b) The downstream point should not be greater than 5km from the release point.
c) The data from background monitoring points must not be used where they are affected by releases from other mines.

Table C9 (Receiving waters contaminant trigger levels)

Quality characteristic	Trigger level	Monitoring frequency
pH	6.5 – 8.0	Daily during the release
Electrical conductivity ($\mu\text{S}/\text{cm}$)	1000	
Suspended solids (mg/L)	TBC*	
Sulphate (SO_4^{2-}) (mg/L)	1000	

*To be updated in accordance with condition C2.

Environmental authority EPML00586713 Eagle Downs Coal Mine

C26	If quality characteristics of the receiving water at the downstream monitoring points exceed any of the trigger levels specified in Table C9 (Receiving waters contaminant trigger levels) during a release event the environmental authority holder must compare the downstream results to the upstream results in the receiving waters and: (a) where the downstream result is the same or a lower value than the upstream value for the quality characteristic then no action is to be taken; (b) where the downstream results exceed the upstream results complete an investigation into the potential for environmental harm and provide a written report to the administering authority via WaTERS within 90 days outlining: (i) details of the investigations carried out; and (ii) actions taken to prevent environmental harm.
C27	Receiving environment monitoring program (REMP) A REMP must be developed and implemented by the environmental authority holder to monitor and record the effects of the release of contaminants on the receiving environment periodically and whilst contaminants are being discharged from the site, with the aims of identifying and describing the extent of any adverse impacts to local environmental values, and monitoring any changes in the receiving water. A copy of the REMP must be provided to the administering authority prior to its implementation and due consideration given to any comments made on the REMP by the administering authority. For the purposes of the REMP, the receiving environment is the waters of Ripplestone Creek (Eastern Tributary) and connected waterways within 20km downstream of the release.

Environmental authority EPML00586713 Eagle Downs Coal Mine

C28	The REMP must address (but not necessarily be limited to) the following: (a) must be undertaken in accordance with the Department of Environment and Science <i>Guideline Receiving environment monitoring program guideline</i>; and (b) description of potentially affected receiving waters including key communities and background water quality characteristics based on accurate and reliable monitoring data that takes into consideration any temporal variation (e.g. seasonality); (c) description of applicable environmental values and water quality objectives to be achieved (i.e. as scheduled pursuant to the <i>Environmental Protection (Water and Wetland Biodiversity) Policy 2019</i>); (d) any relevant reports prepared by other governmental or professional research organisations that relate to the receiving environment within which the REMP is proposed; (e) water quality targets within the receiving environment to be achieved, and clarification of contaminant concentrations or levels indicating adverse environmental impacts during the REMP; (f) monitoring for any potential adverse environmental impacts caused by the release; (g) monitoring of stream flow and hydrology; (h) monitoring of toxicants should consider the indicators specified in Table C3 (Mine affected water trigger investigation levels) to assess the extent of the compliance of concentrations with water quality objectives and/or the ANZECC & ARMCANZ 2000 guidelines for slightly to moderately disturbed ecosystems; (i) monitoring of physical chemical parameters as a minimum those specified in Table C2 (Mine affected water release limits) (in addition to dissolved oxygen saturation and temperature); (j) monitoring biological indicators (for macro invertebrates in accordance with the AusRivas methodology) and metals/metalloids in sediments (in accordance with ANZECC & ARMCANZ 2000, BATLEY and/or the most recent version of AS5667.1 <i>Guidance on Sampling of Bottom Sediments</i>) for permanent, semi-permanent water holes and water storages; (k) the locations of monitoring points (including the locations specified in Table C8 (Receiving water upstream background sites and downstream monitoring points) which are background and downstream impacted sites for each release point); (l) the frequency or scheduling of sampling and analysis sufficient to determine water quality objectives and to derive site specific reference values within two years (depending on wet season flows) in accordance with the <i>Queensland Water Quality Guidelines 2009</i>. For ephemeral streams, this should include periods of flow irrespective of mine or other discharges; (m) specify sampling and analysis methods and quality assurance and control; (n) any historical datasets to be relied upon; (o) description of the statistical basis on which conclusions are drawn; and (p) any spatial and temporal controls to exclude potential confounding factors.
-----	--

Environmental authority EPML00586713 Eagle Downs Coal Mine

C29	A report outlining the findings of the REMP, including all monitoring results and interpretations must be prepared annually and made available on request to the administering authority. This report must include: (a) an assessment of background reference water quality; (b) the condition of downstream water quality compared against water quality objectives; and (c) the suitability of current discharge limits to protect downstream environmental values.
C30	Water reuse Mine affected water may be piped or trucked or transferred by some other means that does not contravene the conditions of this environmental authority and deposited into artificial water storage structures, such as farm dams or tanks, or used directly at properties owned by the environmental authority holder or a third party (with the consent of the third party).
C31	Water general All determinations of water quality must be: (a) performed by a person or body possessing appropriate experience and qualifications to perform the required measurements; (b) made in accordance with methods prescribed in the latest edition of the administering authority's <i>Monitoring and Sampling Manual</i>; (c) collected from the monitoring locations identified within this environmental authority, within ten (10) hours of each other where possible; (d) carried out on representative samples; and (e) laboratory testing must be undertaken using a laboratory accredited (e.g. NATA) for the method of analysis being used. <i>Note: Condition C31 requires the Monitoring and Sampling Manual to be followed and where it is not followed because of exceptional circumstances this should be explained and reported with the results.</i>
C32	The release of contaminants directly or indirectly to waters: (a) must not produce any visible discolouration of receiving waters, and (b) must not produce any slick or other visible or odorous evidence of oil, grease or petrochemicals nor contain visible floating oil, grease, scum, litter or other objectionable matter.

Environmental authority EPML00586713 Eagle Downs Coal Mine

C33	Annual water monitoring reporting The following information must be recorded in relation to all water monitoring required under the conditions of this environmental authority and submitted to the administering authority in the specified format with each annual return: (a) the date on which the sample was taken; (b) the time at which the sample was taken; (c) the monitoring point at which the sample was taken; (d) the measured or estimated daily quantity of the contaminants released from all release points; (e) the release flow rate at the time of sampling for each release point; (f) the results of all monitoring and details of any exceedance with the conditions of this environmental authority; (g) and water quality monitoring data must be provided to the administering authority in the specified electronic format upon request.
C34	Temporary interference with waterways Temporarily destroying native vegetation, excavating, or placing fill in a watercourse, lake or spring necessary for and associated with mining operations must be undertaken in accordance with Department of Natural Resources and Mines (or its successor) <i>Guideline – Activities in a Watercourse, Lake or Spring associated with Mining Activities</i>.
C35	Water Management Plan A Water Management Plan must be developed by an appropriately qualified person and implemented.
C36	The Water Management Plan must provide for effective management of actual and potential environmental impacts resulting from water management associated with the mining activity carried out under this environmental authority, and must include: (a) a study of the source of contaminants; (b) a water balance model for the site; (c) a water management system for the site; (d) measures to manage and prevent saline drainage; (e) details of the management methodology for brine produced by the ROWTP once constructed; (f) measures to manage and prevent acid rock drainage; (g) contingency procedures for emergencies; and (h) a program for monitoring and reviewing the effectiveness of the Water Management Plan.
C37	Each year the environmental authority holder must undertake a review of the water management plan prior to the wet season (i.e. by 1 November) and a further review following the wet season (i.e. by 1 May the following year) to ensure that proper and effective measures, practices or procedures are in place so that the mine is operated in accordance with the conditions of this environmental authority and that environmental harm is prevented or minimised.

Environmental authority EPML00586713 Eagle Downs Coal Mine

C38	A copy of the water management plan and/or a review of the water management plan must be provided to the administering authority on request.
C39	Saline drainage The environmental authority holder must ensure proper and effective measures are taken to avoid or otherwise minimise the generation and/or release of saline drainage.
C40	Acid rock drainage The environmental authority holder must ensure proper and effective measures are taken to avoid or otherwise minimise the generation and/or release of acid rock drainage.
C41	Stormwater and water sediment controls An Erosion and Sediment Control Plan must be developed by an appropriately qualified person and implemented for all stages of the mining activities on the site to minimise erosion and the release of sediment to receiving waters and contamination of stormwater.
C42	The Erosion and Sediment Control Plan must include: (a) all clean waters, from undisturbed areas, are kept separate from mine affected waters from disturbed areas; (b) water from disturbed catchments are diverted into the mine water management system or sedimentation dams; (c) new sedimentation dams are designed to capture the sediment volume calculated for the catchment area for an appropriate design storm event; and (d) sediment shall be excavated from sediment dams as required to maintain design capacity.
C43	The maintenance and cleaning of any vehicles, plant or equipment must not be carried out in areas from which contaminants can be released into any receiving waters.
C44	Any spillage of wastes, contaminants or other materials must be cleaned up as quickly as practicable to minimise the release of wastes, contaminants or materials to any stormwater drainage system or receiving waters.
C45	Groundwater Groundwater affected by the mining activities must be monitored at the locations shown in Figure 1 (Surface Water Release Points and Groundwater Monitoring Locations) and at the locations and frequencies specified in Table C10 (Groundwater monitoring locations and frequency) and condition C46 and be carried out in accordance with the latest edition of the administering authority's <i>Monitoring and Sampling Manual</i>.

Environmental authority EPML00586713 Eagle Downs Coal Mine

Table C10 (Groundwater monitoring locations and frequency)

Monitoring point	Latitude	Longitude	Monitoring frequency
MB1	-22.136842	148.195178	Annually, until longwall mining commences, where monitoring must then be conducted quarterly
MB2	-22.156231	148.199511	
MB3	-22.150961	148.233948	
MB4	-22.203347	148.227295	
MB5	-22.216379	148.246656	
MB6	-22.179758	148.233908	
MB7	-22.170881	148.214309	
MB8	-22.167859	148.222274	
MB9	-22.19366	148.217007	
MB10	-22.142977	148.230204	
MB11 (D)	-22.178411	148.191504	
MB11 (S)	-22.178411	148.191504	
MB12	-22.148517	148.169677	
Landholder Bore 8 (LHB8)	-22.131095	148.200394	

C46	The environmental authority holder is permitted to monitor groundwater annually until commencement of longwall mining activities begins. Once longwall mining commences, groundwater monitoring must be conducted quarterly.
C47	The environmental authority holder must develop and implement a groundwater monitoring program.
C48	The program must be able to detect a significant change to ground water quality values (consistent with the current suitability of the groundwater for beneficial uses) due to activities that are part of this mining project.
C49	The program must effectively monitor the water pressure across the base of the Dry Rejects Emplacement Area (DREA) at the interface with the natural surface and provide the means to reduce the phreatic surface within the DREA, where monitoring indicates this is necessary.
C50	The environmental authority holder must report the results and analysis of groundwater monitoring to the administering authority on request.
C51	Subject to condition C52 groundwater levels must be monitored and groundwater draw down fluctuations in landowner bores in excess of two metres per year, not resulting from the pumping of licensed bores, must be notified as per conditions A8 to A9 .
C52	Groundwater affected by the mining activities must be monitored at the locations and frequencies defined in Table C10 (Groundwater monitoring locations and frequency) and as shown in Figure 1 (Surface Water Release Points and Groundwater Monitoring Locations) attached to this environmental authority.

Environmental authority EPML00586713 Eagle Downs Coal Mine

C53	If the groundwater contaminant trigger values defined in Table C11 (Groundwater contaminant trigger values) are exceeded then the environmental authority holder must complete an investigation into the potential for environmental harm and notify the administering authority within twenty-eight (28) days of receiving the analysis results.
------------	---

Table C11 (Groundwater contaminant trigger values)

Water Quality Indicator	Unit	Monitoring Bore Trigger Levels									
		MB1	MB2	MB3	MB4	MB5	MB6	MB7	LHB08	LHB11	LHB13
Aluminium	µg/L	5,000					5,000	5,000	5,000	5,000	5,000
Antimony	µg/L	2	1	4	2	1	4.8	4.8	4.8	4.8	4.8
Arsenic	µg/L	500					500	500	500	500	500
Calcium	mg/L	77	42	694	82	69	1,000	1,000	1,000	1,000	1,000
Chloride, Cl	mg/L	389	1,300	6,980	1,900	1,500	9,050	9,050	9,050	9,050	9,050
CO ₃	mg/L	3					800	800	800	800	800
Dissolved Solids (Total)	mg/L	1,200	2,310	16,000	3,490	2,700	TBA	TBA	4,420	4,420	1,200
Electrical Conductivity	µS/cm	2,100	4,200	18,000	6,200	4,800	TBA	TBA	6320	6320	2018
HCO ₃	mg/L	780	780	780	780	780	780	780	780	780	780
Iron	µg/L	4,600	747	5,590	7,050	2,350	9,985	9,985	9,985	9,985	9,985
Magnesium – Dissolved	mg/L	500					500	500	500	500	500
Mercury	µg/L	2					5.66	5.66	5.66	5.66	5.66
Molybdenum	µg/L	150					150	150	150	150	150
Petroleum Hydrocarbons (Total)	µg/L	450					450	450	450	450	450
pH	pH Units	5.0 – 8.5					5.0 – 8.5	5.0 – 8.5	5.0 – 8.5	5.0 – 8.5	5.0 – 8.5
Selenium	µg/L	20					20	20	20	20	20
Silver	µg/L	2					11	11	11	11	11
SO ₄	mg/L	1,000					1,000	1,000	1,000	1,000	1,000
Sodium	mg/L	320	1,000	3,800	1,400	1,000	9,050	9,050	9,050	9,050	9,050
TPH (as total)	µg/L	264	263	459	260	260	450	450	450	450	450

Environmental authority EPML00586713 Eagle Downs Coal Mine

C54	Background groundwater monitoring program A background groundwater monitoring program must be kept up to date with new reference boreholes as construction of the mine begins. These include reference bore(s) that are located an appropriate distance from potential sources of impact from mining activities to provide the following: (a) representative groundwater samples from the aquifers potentially affected by mining activities; (b) at least twelve sampling events (monthly sampling) to determine background groundwater quality as far as practicable; (c) background groundwater quality in hydraulically isolated background bore(s) that have not been affected by any mining activities; and (d) final groundwater contaminant trigger levels and limits required in condition C56.
C55	The groundwater monitoring data must be reviewed on an annual basis. The review must include the assessment of groundwater levels and water quality data, and the suitability of the monitoring network. The assessment must be submitted to the administering authority within twenty-eight (28) days of receiving the report.
C56	Groundwater contaminant trigger levels as per Table C11 (Groundwater contaminant trigger values) must be finalised based on a background groundwater monitoring program defined in condition C54 and submitted to the administering authority prior to commencement of longwall mining.
C57	The following information must be recorded in relation to all groundwater water sampling: (a) the date on which the sample was taken; (b) the time at which the sample was taken; (c) the monitoring point at which the sample was taken; and (d) the results of all monitoring.
C58	Acid rock drainage and leachate management Subject to the release limits defined in Agency Interest: Water, all reasonable and practicable measures must be implemented to prevent hazardous leachate being directly or indirectly released or likely to be released as a result of the activity to any groundwater.
C59	Sewage effluent All effluent released from the treatment plant must be monitored at the frequency and for the parameters specified in Table C12 (Sewage treatment effluent quality targets for dust suppression and irrigation).

Table C12 (Sewage treatment effluent quality targets for dust suppression and irrigation)

Monitoring point (MP)	Quality characteristics	Release limits (Maximum)	Frequency
MP5 Treated effluent storage pond	5 day Biological oxygen demand (mg/L)	20	Monthly
	Suspended solids (mg/L)	30	
	Thermotolerant coliforms (cfu/100mL)	1000	
	Total phosphorous (mg/L)	15	
	Total nitrogen (mg/L)	30	
	pH	6.5 to 8.5	

C60	Sewage effluent used for dust suppression or irrigation must not exceed sewage effluent release limits defined in Table C12 (Sewage treatment effluent quality targets for dust suppression and irrigation) .
C61	Sewage effluent used for dust suppression or irrigation must not cause spray drift or over spray to any sensitive or commercial place.
C62	Subject to conditions C59 to C61 inclusive, sewage effluent from sewage treatment facilities must be reused or evaporated and must not be directly released from the sewage treatment plant to any waters or the bed and banks of any waters.
C63	The effluent irrigation areas must have a separation distance of at least thirty (30) metres from any groundwater bores and surface waters.
C64	The irrigation of treated effluent must be carried out in a manner such that: (a) vegetation is not damaged; (b) soil erosion and soil structure damage is avoided; (c) there is no surface ponding of treated effluent; (d) percolation of treated effluent beyond the plant root zone is minimized; (e) the capacity of the land to assimilate nitrogen, phosphorus, salts, water and organic matter (as measured by oxygen demand) is not exceeded; and (f) the quality of groundwater is not adversely affected.
C65	Notices must be prominently displayed on any treated effluent irrigation area warning staff and the public that the area is irrigated with treated effluent and not to use or drink the treated effluent. These notices must be maintained in a visible and legible condition.
C66	The daily volume of contaminants released to land must be determined by an appropriate method, for example a flow meter and records kept of such determinations.

Environmental authority EPML00586713 Eagle Downs Coal Mine

Agency Interest – Noise and Vibration	
Condition number	Condition
D1	Noise nuisance Noise from the mining activity must not cause an environmental nuisance, at any sensitive or commercial place.
D2	Noise monitoring and air blast overpressure When requested by the administering authority, noise monitoring and air blast overpressure must be undertaken within a reasonable and practicable timeframe nominated by the administering authority to investigate any complaint (which is neither frivolous nor vexatious nor based on mistaken belief in the opinion of the authorised officer) of environmental nuisance at any sensitive or commercial place, and the results must be notified within fourteen (14) days to the administering authority following completion of monitoring.
D3	If the environmental authority holder can provide evidence through monitoring that the limits defined in Table D1 (Noise limits) and Table D2 (Airblast overpressure level) , are not being exceeded then the holder is not in breach of condition D1 . Monitoring must include: (a) LA, 10, adj, 10 mins; (b) LA, 1, adj, 10 mins; (c) relevant background sound level; (d) the level and frequency of occurrence of impulsive or tonal noise; (e) atmospheric conditions including wind speed, direction and temperature; (f) location of blasts (as appropriate); and (g) location, date and time of recording.

Table D1 (Noise limits)

Noise level dB(A)	Monday to Sunday (including public holidays)		
	7am – 6pm	6pm – 10pm	10pm – 7am
	Noise measured at a ‘sensitive receptor’		
LA10, adj, 10 mins	B/g + 5	B/g + 5	B/g + 3
LA1, adj, 10 mins	B/g + 10	B/g + 10	42
Noise measured at a ‘Commercial place’			
LA10, adj, 10 mins	B/g + 10	B/g + 10	B/g + 5

Note: Where “Background” means background sound pressure level measured in accordance with the latest edition of the administering authority’s Noise Measurement Manual. Table D1 (Noise limits) does not purport to set operating hours for the mining activities.

Environmental authority EPML00586713 Eagle Downs Coal Mine

Table D2 (Airblast overpressure level)

Parameter	Airblast overpressure measured at a sensitive or commercial place	
	Monday to Sunday 9am – 7pm	Other times and public holidays*
Air blast overpressure level (dB [Lin] Peak)	Maximum 115 dB for 4 out of 5 consecutive blasts	No blasting to occur
Air blast overpressure level (dB [Lin] Peak)	120 dB maximum	No blasting to occur

Note: Table D2 (Airblast overpressure level) does not purport to set limits applicable to any particular explosive blast, rather sets design criteria for every explosive blast. *This restriction regarding blasting times and days are only applicable to near surface blasting and do not apply to blasting undertaken as part of underground mining or development works.

D4	If monitoring indicates exceedance of the limits in Table D1 (Noise limits) and Table D2 (Airblast overpressure level), then the environmental authority holder must: (a) address the complaint including the use of appropriate dispute resolution if required; and (b) immediately implement noise abatement measures so that emissions of noise from the activity do not result in further environmental nuisance.
D5	The method of measurement and reporting of noise levels must comply with the latest edition of the administering authority's <i>Noise Measurement Manual</i> .
D6	Vibration nuisance Vibration from the mining activity must not cause an environmental nuisance, at any sensitive place.
D7	When requested by the administering authority, vibration monitoring must be undertaken within a reasonable and practicable timeframe nominated by the administering authority to investigate any complaint (which is neither frivolous nor vexatious nor based on mistaken belief in the opinion of the authorised officer) of environmental nuisance at any sensitive or commercial place, and the results must be notified within fourteen (14) days to the administering authority following completion of monitoring.
D8	If the environmental authority holder can provide evidence through monitoring that the limits defined in Table D3 (Vibration limits), are not being exceeded then the holder is not in breach of condition D6. Monitoring must include: (a) peak particle velocity (mm/s); (b) air blast overpressure level (dB linear peak); (c) location of the blast/s within the mining area (including which bench level); (d) atmospheric conditions including temperature, relative humidity and wind speed and direction; and (e) location, date and time of recording.

Table D3 (Vibration limits)

Vibration parameter	Vibration measured at a sensitive place	
	Monday to Sunday 9am – 7pm	Other times and public holidays*
Peak particle velocity (mm/s)	Maximum 5 mm/s for 4 out of 5 consecutive blasts	No blasting to occur
Peak particle velocity (mm/s)	10 mm/s maximum	No blasting to occur

Note: The method of measurement and reporting of vibration levels must comply with the latest edition of the administering authority's vibration and air blast overpressure monitoring guideline.

** This restriction regarding blasting times and days are only applicable to near surface blasting and do not apply to blasting undertaken as part of underground mining or development works.*

D9	For the purposes of condition D6 the mining activities will not cause environmental nuisance where vibration from the mining activities does not exceed the criteria specified in Table D3 (Vibration limits) .
D10	If monitoring indicates exceedance of the limits in Table D3 (Vibration limits) , then the environmental authority holder must: (a) address the complaint including the use of appropriate dispute resolution if required; and (b) immediately implement vibration abatement measures so that vibration from the activity does not result in further environmental nuisance.
D11	Every explosive blast for the mining activity shall be designed by a competent person to achieve the criteria specified in Table D2 (Airblast overpressure level) and Table D3 (Vibration limits) .
D12	All relevant information pertaining to the design of every explosive blast for the mining activity in relation to the criteria specified in Table D2 (Airblast overpressure level) and Table D3 (Vibration limits) shall be kept in written and diagrammatic form.

Agency Interest – Land	
Condition number	Condition
E1	Preventing contaminant release to land Contaminants must not be released to land in manner which constitutes nuisance, material or serious environmental harm.
E2	Topsoil Topsoil must be strategically stripped ahead of mining in accordance with a topsoil management plan.
E3	A topsoil inventory which identifies the topsoil requirements for the Eagle Downs Coal Mine and availability of suitable topsoil on site must be developed, implemented and updated annually and provided to administering authority upon request.
E4	Subsidence Management Plan A Subsidence Management Plan must be developed by an appropriately qualified person and implemented prior to the <i>recommencement of production activities</i> and must be made available to the administering authority upon request.

Environmental authority EPML00586713 Eagle Downs Coal Mine

E5	The Subsidence Management Plan must provide for effective management of actual and potential environmental impacts resulting from subsidence associated with the mining activity carried out under this environmental authority, and must include: (a) Impact assessment - The expected (and observed – when activities commence) impact of subsidence on any land, waterways, ground water and floodplain including but not limited to: (i) Physical condition of surface drainage (1) erosion; (2) areas susceptible to higher levels of erosion such as waterways confluences; (3) incision processes; (4) stream widening; (5) tension cracking; (6) lowering of bed and banks; (7) creation of instream waterholes; (8) changes to local drainage patterns (ii) Overland flow. (1) capture of overland flow by subsided long-wall panels; (2) increased overbank flows due to lowering of high bank of waterways; (3) the portion of local and large scale catchment likely to be captured by subsided long- wall panels and the associated impacts on downstream users; (iii) Water quality (1) surface water (including overland flow and ponding) (2) groundwater; (iv) Land condition: current land condition to be impacted by subsidence (v) Infrastructure: detail of existing and planned infrastructure where there is a potential impact from effects of land subsidence (vi) Groundwater (vii) Erosion (viii) Floods (b) Measures to manage, monitor and prevent residual ponding; (c) Water quality management and monitoring program for subsidence ponding areas; (d) Risk assessment (e) Mitigation measures (including option analysis, design requirements and implementation) for each potential impact (f) Trigger action response plan to ensure achievement of condition E8, E9 and E10 and to address each potential impact (g) Monitoring and review program of mitigation measures and subsidence areas to assure that any subsidence impacts are addressed in a timely manner and the baseline condition of the land prior to subsidence has been determined with consideration of the impact assessment of E5(a). (h) Contingency procedures for emergencies
-----------	--

Environmental authority EPML00586713 Eagle Downs Coal Mine

	(i) A program for monitoring and review of the effectiveness of the Subsidence Management Plan
E6	The Subsidence Management Plan must be reviewed each calendar year, following the <i>recommencement of production activities</i>, until it can be demonstrated that subsidence is no longer occurring and mitigation measures for each environmental impact, as identified by the Subsidence Management Plan, have been implemented and do not require ongoing maintenance. The report must be prepared by an appropriately qualified person. The report must: (a) assess the plan against the requirements under condition E5; (b) include recommended actions to ensure actual and potential environmental impacts are effectively managed for the coming year; and (c) identify any amendments made to the Subsidence Management Plan following the review.
E7	Subsidence monitoring Following the commencement of mining activities resulting in subsidence, subsidence must be monitored, on a regular basis as set out in the Subsidence Management Plan as required by condition E4.
E8	Drainage lines Drainage lines must be installed in subsidence areas where the accumulation of surface water (ponding) is expected to occur beyond that depicted in Figure 2 (Maximum disturbance area). The drainage lines must be designed by an appropriately qualified person and installed to achieve long term stability, effective drainage of the area and maintenance of the pre-disturbance land use.
E9	Pond overflow water quality The Electrical Conductivity (baseflow), turbidity, suspended solids, pH and sulphate of any overflow from subsidence areas must meet the water quality objectives for the Upper Isaac River catchment waters for aquatic ecosystems as per the latest version of the "Environmental Protection (Water) Policy 2009 Isaac River Sub-basin Environmental Values and Water Quality Objectives".
E10	Pond water quality The residual ponding areas must meet the water quality objectives for beef cattle as per the "Environmental Protection (Water) Policy 2009 Isaac River Sub-basin Environmental Values and Water Quality Objectives". The relevant salinity limit is 'no adverse effects on animals'.
E11	PRCP schedule Progressive rehabilitation of the disturbed land must be carried out in accordance with the approved Progressive Rehabilitation and Closure Plan (PRCP) schedule P-PRCP-100812653 for this environmental authority.

E12	Cleared vegetation from the site must be managed in accordance with the following hierarchy: (a) reuse, e.g. use of logs and tree stumps as shelter for fauna in rehabilitated areas; (b) recycle, e.g. mulching of vegetation and use in rehabilitation on the site; and (c) other alternative management options implemented in a way that causes the least amount of environmental harm.
E13	Storage and handling of flammable and combustible liquids All flammable and combustible liquids must be contained within an on-site containment system and controlled in a manner that prevents environmental harm and maintained in accordance with the current version of <i>AS 1940 – Storage and Handling of Flammable and Combustible Liquids</i>.
E14	Spillage of all flammable and combustible liquid must be controlled in a manner that prevents environmental harm.
E15	Storage and handling of chemicals All chemicals must be contained within an on-site containment system and controlled in a manner that prevents environmental harm and maintained in accordance with the current version of the relevant Australian Standard.
E16	Spillage of all chemicals must be controlled in a manner that prevents environmental harm.
E17	Surrender The holder must meet the conditions and the rehabilitation milestones under the PRCP schedule prior to the surrender of the environmental authority.

Environmental authority EPML00586713 Eagle Downs Coal Mine

Agency Interest – Waste Management	
Condition number	Condition
F1	Storage of tyres Scrap tyres stored awaiting disposal or transport for take-back and recycling, or waste-to-energy options must be stored in stable stacks and at least ten (10) metres from any other scrap tyre storage area, or combustible or flammable material, including vegetation.
F2	All reasonable and practicable fire prevention measures must be implemented, including removal of grass and other materials within a ten (10) metre radius of the scrap tyre storage area.
F3	Waste Management A Waste Management Plan must be developed and implemented by the environmental authority holder and must: (a) describe how the Eagle Downs Coal Mine recognises and applies the waste management hierarchy; (b) identify characterizations of wastes generated from the project and general volume trends over the past five (5) years (c) include a program for safe recycling or disposal of all wastes – reusing and recycling where possible; (d) include waste commitments with auditable targets to reduce, reuse and recycle; (e) include the waste management control strategies that must consider: (i) the types of wastes; (ii) segregation of the wastes; (iii) storage of the wastes; (iv) transport of the wastes; (v) monitoring and reporting matters concerning the waste; (vi) emergency response planning; and (vii) disposal, reused and recycling options. (f) identify the potential adverse and beneficial impacts of the wastes generated; (g) detail the hazardous characteristics of the waste generated (if any); (i) cover a disposal procedure for hazardous wastes; (ii) outline the process to be implemented to allow for continuous improvement of the waste management systems; (iii) identify responsible staff (positions) for implementing, managing and reporting the Waste Management Plan; and (iv) cover a staff awareness and induction program that encourages re-use and recycling.
F4	Waste must not be burned.
F5	Where possible and practical, vegetation waste from clearing shall be spread on rehabilitated areas. Vegetation waste only may be burnt as a last resort and only if there is minimal risk of causing nuisance to the neighbouring sensitive receptors.

Environmental authority EPML00586713 Eagle Downs Coal Mine

F6	A designated area must be set aside for the segregation of economically viable, recyclable solid and liquid waste.
F7	Records must be kept for five years, and must include the following information: (a) date of pickup of waste; (b) description of waste; (c) cross reference to relevant waste transport documentation; (d) quantity of waste; (e) origin of the waste; (f) destination of the waste; and (g) intended fate of the waste, for example, type of waste treatment, reprocessing or disposal.
F8	All regulated waste received at and removed from the site must be transported by a person who holds a current authority to transport such waste.
F9	Except as otherwise provided by the conditions of this authority, all waste removed from the site must be taken to a facility that is lawfully allowed to accept such waste.
F10	Dry Reject Emplacement Area (DREA) Waste from the Coal Handling and Preparation Plant shall be disposed of: (a) in accordance with conditions G1 to G18 (Dams) of this environmental authority if the shear strength of the waste is less than 1000 Pascals when deposited; or (b) In accordance with conditions F11 to F16 if the shear strength of the waste is equal or more than 1000 Pascals when deposited.
F11	DREA - certification and operation The authorised DREA used for the disposal of waste is located within the control points defined in Table F1 (Location of DREA) .

Table F1 (Location of DREA)

Name of regulated area	Latitude	Longitude
Dry Reject Emplacement Area	-22.171076	148.222011
	-22.171674	148.221841
	-22.174403	148.215677
	-22.174115	148.215003
	-22.175799	148.211315
	-22.17652	148.210895
	-22.177718	148.208423
	-22.178682	148.207548
	-22.180163	148.207532
	-22.183858	148.209862
	-22.185472	148.210302
	-22.186596	148.209739
	-22.188026	148.210635
	-22.188839	148.210564
	-22.189008	148.210837
	-22.188348	148.211054
	-22.190185	148.215454
	-22.190402	148.217852
	-22.191329	148.218296
	-22.191283	148.218412
	-22.190338	148.217939
	-22.190035	148.218518
	-22.188617	148.219796
	-22.188951	148.221021
	-22.191389	148.224659
	-22.192002	148.226178
	-22.191591	148.227920
	-22.188001	148.230760
	-22.181399	148.230732
	-22.181013	148.231543
	-22.180942	148.23141
	-22.181227	148.230653
	-22.180001	148.230409
	-22.178172	148.228579
	-22.172163	148.225211
	-22.171338	148.224389

Environmental authority EPML00586713 Eagle Downs Coal Mine

F12	DREA shall be designed to prevent environmental harm arising from contaminants being generated in the facility, leachate and runoff from the facility or other sources.
F13	The authorised DREA must be constructed and maintained in accordance with certified plans submitted to the administering authority.
F14	Design plans for the authorised DREA must include performance indicators, such that: (a) during operations the DREA will be operated with minimal or no potential for adverse environmental harm resulting from collapse of any component of facility; (b) the potential for leachate generation will be minimal or non-existent; and (c) adequate drainage structures, erosion protection and storage are provided to manage seasonal and rare rainfall events with minimal or no environmental harm
F15	Construction of any DREA detailed in Table F1 (Location of DREA) must not commence unless: (a) the environmental authority holder has submitted to the administering authority two copies of a design plan; (b) certification from a suitably qualified and experienced person that the design of the DREA will deliver the performance stated in that design plan and that it will be compliant in all other respects with this environmental authority; (c) at least twenty (20) business days has passed since the receipt of those documents by the administering authority; (d) The administering authority notifies the environmental authority holder that a design plan and certification has been submitted for that disposal facility.
F16	Operational plan – DREA An operational plan must be developed and maintained for the DREA. The operational plan must include but not be limited to: (a) description of landform development stages of the DREA; (b) placement technique for spoil and waste material from the coal handling and processing plant on the mine site; (c) management of any containment structures within the DREA designed to contain materials from the coal handling and processing plant on the mine site; (d) demonstration of how operations of the DREA are consistent with the accepted design plan for the facility; and (e) decommissioning and rehabilitation strategies for the DREA that demonstrate consistency with conditions of this environmental authority and the latest version of PRCP_P-PRCP-10081265.
F17	Tailings/coal rejects The management of tailings disposal must be in accordance with the following: (a) all tailings material must be progressively characterised during disposal for acid generating capacity and selected metals and salts. Samples shall be tested for: pH, Electrical Conductivity (EC), Acid Neutralising Capacity (ANC), Net Acid Generation (NAG) (reporting NAG capacity and NAG pH after oxidation), Total Sulphur (S), Chromium Reducible Sulphur (CRS), Boron (B) Cadmium (Cd), Iron (Fe), Aluminium (Al), Copper (Cu), Magnesium (Mg), Manganese (Mn), Calcium (Ca), Sodium (Na), Zinc (Zn) and Sulphate (SO₄);

Environmental authority EPML00586713 Eagle Downs Coal Mine

	(b) one (1) tailing sample will be collected each and every week while the mine coal processing plant is operational and the sample will be stored. After four (4) samples have been collected the samples will be composited and the composite sample characterised as outlined in (a) above. A minimum of one composite tailing sample will undergo characterisation per month. A minimum of twelve (12) composite tailing samples will undergo characterisation per year; (c) records must be kept of the tailings disposal to indicate locations and characteristics of tailings stored within the tailings storage facility; (d) where the acid producing potential of tailings material has not been conclusively determined, geochemical kinetic testing must be conducted to indicate oxidation rates, potential reaction products and effectiveness of control strategies; and (e) tailings identified as potentially acid producing will be covered or placed to minimise surface oxidation. The maximum duration of surface exposure of these materials is one month.
F18	Mine waste A Mining Waste Management Plan together with the certification by an appropriately qualified person must be developed and implemented during the continuation of the environmental authority. The Mining Waste Management Plan must at a minimum include: (a) characterisation programs to ensure that all mining waste is progressively characterised during disposal for net acid producing potential, salinity and the following contaminants: pH, Electrical Conductivity (EC), Acid Neutralising Capacity (ANC), Net Acid Generation (NAG) (reporting NAG capacity and NAG pH after oxidation), Total Sulphur (S), Chromium Reducible Sulphur (CRS), Boron (B) Cadmium (Cd), Iron (Fe), Aluminium (Al), Copper (Cu), Magnesium (Mg), Manganese (Mn), Calcium (Ca), Sodium (Na), Zinc (Zn) and Sulphate (SO₄); (b) characterisation programs to ensure that the physical properties of the mining waste is progressively characterised during disposal; (c) the availability or leachability of metals from the mining waste; (d) quantification of PAF from mining waste present; (e) review impacts of the PAF mining waste on the rehabilitation; (f) management actions for mining waste that has been identified as having a high availability or leachability of metals; (g) management actions for mining waste that has been defined as PAF; (h) identification of environmental impacts and potential environmental impacts; (i) control measures for routine operations to minimise likelihood of environmental harm; (j) contingency plans and emergency procedures for non-routine situations; and (k) periodic review of environmental performance and continual improvement.

Agency Interest – Regulated Structures	
Condition number	Condition
G1	Assessment of Consequence Category The consequence category of any structure must be assessed by a suitably qualified and experienced person in accordance with the Manual for Assessing Consequence Categories and Hydraulic Performance of Structure (ESR/2016/1933) at the following times: (a) prior to the design and construction of the structure, if it is not an existing structure; or (b) prior to any change in its purpose or the nature of its stored contents.
G2	A consequence assessment report and certification must be prepared for any structure assessed and the report may include a consequence assessment for more than one structure.
G3	Certification must be provided by the suitably qualified and experienced person who undertook the assessment, in the form set out in the <i>Manual for Assessing Consequence Categories and Hydraulic Performance of Structures (ESR/2016/1933)</i> .
G4	Design and Construction of a Regulated Structure Conditions G5 to G9 inclusive do not apply to existing structures.
G5	All regulated structures must be designed by, and constructed under the supervision of, a suitably qualified and experienced person in accordance with the requirements of the <i>Manual for Assessing Consequence Categories and Hydraulic Performance of Structures (ESR/2016/1933)</i> .
G6	Construction of a regulated structure is prohibited unless: (a) the holder has submitted a consequence category assessment report and certification to the administering authority; and (b) certification for the design, design plan and the associated operating procedures has been certified by a suitably qualified and experienced person in compliance with the relevant condition of this authority.
G7	Certification must be provided by the suitably qualified and experienced person who oversees the preparation of the design plan in the form set out in the <i>Manual for Assessing Consequence Categories and Hydraulic Performance of Structures (ESR/2016/1933)</i> , and must be recorded in the Register of Regulated Structures.
G8	Regulated structures must: (a) be designed and constructed in compliance with the <i>Manual for assessing consequence categories and hydraulic performance of structures (ESR/2016/1933)</i>; (b) be designed and constructed with due consideration given to ensuring that the design integrity would not be compromised on account of: (i) floodwaters from entering the regulated dam from any watercourse or drainage line; and (ii) wall failure due to erosion by floodwaters arising from any watercourse or drainage line. (c) for regulated dams that are dams associated with a 'failure to contain – seepage': have the floor and sides of the dam designed and constructed to prevent or minimise the passage of the wetting front and any entrained contaminants through either the floor or sides of the dam during the operational life of the dam and for any period of decommissioning and rehabilitation of the dam.

Environmental authority EPML00586713 Eagle Downs Coal Mine

G9	Certification by the suitably qualified and experienced person who supervises the construction must be submitted to the administering authority on the completion of construction of the regulated structure, and state that: (a) the 'as constructed' drawings and specifications meet the original intent of the design plan for that regulated structure; and (b) construction of the regulated structure is in accordance with the design plan.
G10	Notification of affected persons All affected persons must be provided with a copy of the emergency action plan in place for each regulated structure (a) for existing structures that are regulated structures, within 10 business days of this condition taking effect; (b) prior to the operation of the new regulated structure; and (c) if the emergency action plan is amended, within 5 business days of it being amended.
G11	Operation of a Regulated Structure Operation of a regulated structure, except for an existing structure, is prohibited unless the holder has submitted to the administering authority; (a) one paper copy and one electronic copy of the design plan and certification of the 'design plan' in accordance with condition G7 (b) a set of 'as constructed' drawings and specifications; (c) certification of those 'as constructed drawings and specifications' in accordance with condition G9, (d) where the regulated structure is to be managed as part of an integrated containment system for the purpose of sharing the design storage allowance (DSA) volume across the system, a copy of the certified system design plan (e) the requirements of this authority relating to the construction of the regulated structure have been met; (f) the holder has entered the details required under this authority, into a Register of Regulated Structures; and (g) there is a current operational plan for the regulated structures.
G12	For existing structures that are regulated structures: (a) where the existing structure that is a regulated structure is to be managed as part of an integrated containment system for the purpose of sharing the DSA volume across the system, the holder must submit to the administering authority within twelve (12) months of the commencement of this condition a copy of the certified system design plan including that structure; and (b) there must be a current operational plan for the existing structures.
G13	Each regulated structure must be maintained and operated, for the duration of its operational life until decommissioned and rehabilitated, in compliance with the current operational plan and, if applicable, the current design plan and associated certified 'as constructed' drawings.
G14	Mandatory Reporting Level Conditions G15 to G18 inclusive only apply to regulated structures which have not been certified as low consequence category for 'failure to contain – overtopping'.
G15	The Mandatory Reporting Level (the MRL) must be marked on a regulated dam in such a way that during routine inspections of that dam, it is clearly observable.
G16	The holder must, as soon as practical and within forty-eight (48) hours of becoming aware, notify the administering authority when the level of the contents of a regulated dam reaches the MRL.

Environmental authority EPML00586713 Eagle Downs Coal Mine

G17	The holder must, immediately on becoming aware that the MRL has been reached, act to prevent the occurrence of any unauthorised discharge from the regulated dam.
G18	The holder must record any changes to the MRL in the Register of Regulated Structures.
G19	Design Storage Allowance The holder must assess the performance of each regulated dam or linked containment system over the preceding November to May period based on actual observations of the available storage in each regulated dam or linked containment system taken prior to 1 July of each year.
G20	By 1 November of each year, storage capacity must be available in each regulated dam (or network of linked containment systems with a shared DSA volume), to meet the DSA volume for the dam (or network of linked containment systems).
G21	The holder must, as soon as possible and within forty-eight (48) hours of becoming aware that the regulated dam (or network of linked containment systems) will not have the available storage to meet the DSA volume on 1 November of any year, notify the administering authority.
G22	The holder must, immediately on becoming aware that a regulated dam (or network of linked containment systems) will not have the available storage to meet the DSA volume on 1 November of any year, act to prevent the occurrence of any unauthorised discharge from the regulated dam or linked containment systems.
G23	Annual Inspection Report Each regulated structure must be inspected each calendar year by a suitably qualified and experienced person.
G24	At each annual inspection, the condition and adequacy of all components of the regulated structure must be assessed and a suitably qualified and experienced person must prepare an annual inspection report containing details of the assessment and include recommended actions to ensure the integrity of the regulated structure or a positive statement that no recommendations are required.
G25	The suitably qualified and experienced person who prepared the annual inspection report must certify the report in accordance with the <i>Manual for Assessing Consequence Categories and Hydraulic Performance of Structures (ESR/2016/1933)</i>
G26	The holder must within twenty (20) business days of receipt of the annual inspection report, provide to the administering authority; (a) The recommendations section of the annual inspection report; and (b) If applicable, any actions being taken in response to those recommendations; and (c) If, following the receipt of the recommendations and (if applicable) actions, the administering authority requests a full copy of the annual inspection report from the holder, provide this to the administering authority within ten (10) business days of receipt of the request. Note: That for some model conditions, such as model conditions for dams associated with a resource activity - non mining activity, the notification requirements may be located in a separate part of the conditions of an environmental authority (e.g. under notification requirement conditions).

Environmental authority EPML00586713 Eagle Downs Coal Mine

G27	Transfer Arrangements The holder must provide a copy of any reports, documentation and certifications prepared under this authority, including but not limited to any Register of Regulated Structures, consequence assessment, design plan and other supporting documentation, to a new holder on transfer of this authority.
G28	Register of Regulated Structures A Register of Regulated Structures must be established and maintained by the holder for each regulated structure.
G29	The holder must provisionally enter the required information in the Register of Regulated Structures when a design plan for a regulated dam is submitted to the administering authority.
G30	The holder must make a final entry of the required information in the Register of Regulated Structures once compliance with conditions G11 and G12 has been achieved.
G31	The holder must ensure that the information contained in the Register of Regulated Structures is current and complete on any given day.
G32	All entries in the Register of Regulated Structures must be approved by the chief executive officer for the holder of this authority, or their delegate, as being accurate and correct.
G33	The holder must, at the same time as providing the annual return, supply to the administering authority a copy of the records contained in the Register of Regulated Structures, in the electronic format required by the administering authority.

Agency Interest – Biodiversity	
Condition number	Condition
H1	Environmental offsets Notwithstanding condition A3, significant residual impacts to prescribed environmental matters, are not authorised under this environmental authority or the <i>Environmental Offsets Act 2014</i> unless the impacts are specified in Table H1 (Significant residual impacts to prescribed environmental matters) and are within the maximum disturbance area shown in Figure 2 (Maximum disturbance area).
H2	An environmental offset made in accordance with the <i>Environmental Offsets Act 2014</i> and Queensland Environmental Offsets Policy, as amended from time to time, must be undertaken for the maximum extent of impact to each prescribed environmental matter authorised in Table H1 (Significant residual impacts to prescribed environmental matters).
H3	Records demonstrating that each impact to a prescribed environmental matter not listed in Table H1 (Significant residual impacts to prescribed environmental matters) did not, or is not likely to, result in a significant residual impact to that matter must be: (a) completed by an appropriately qualified person; and (b) kept for the life of the environmental authority.

Table H1 (Significant residual impacts to prescribed environmental matters)

Prescribed Environmental Matter	Location	Maximum extent of impact	Offset required (State)
Regulated Vegetation			
Bluegrass (<i>Dichanthium spp</i>) dominant grasslands of the Brigalow Belt Bioregions (North and South) endangered ecological community*	Figure 5	36ha	No*
Brigalow (<i>Acacia harpophylla</i> dominant and co-dominant) endangered ecological community*	Figure 5	35ha	No*
Endangered regional ecosystem - RE11.3.1 <i>Acacia harpophylla</i> and/or <i>Casuarina cristata</i> open forest on alluvial plains	Figure 6	5.8ha	No**
Endangered regional ecosystem - RE 11.9.5 <i>Acacia harpophylla</i> and/or <i>Casuarina cristata</i> open forest to woodland on fine-grained sedimentary rocks- Endangered	Figure 6	9.8ha	No**
Of concern regional ecosystem - RE 11.3.3 Eucalyptus coolabah woodland on alluvial plains	Figure 6	8.6ha	Yes
Prescribed regional ecosystem - remnant vegetation within prescribed distance of a watercourse			
Endangered regional ecosystem - RE11.3.1 <i>Acacia harpophylla</i> and/or <i>Casuarina cristata</i> open forest on alluvial plains	Figure 6	0.8 ha	No**
Protected wildlife habitat			
Habitat for an animal that is vulnerable wildlife – ornamental snake – <i>Denisonia maculata</i>	Figure 10	35ha	No*
	Figure 10	51.3ha	No**
Habitat for an animal that is vulnerable wildlife – Squatter pigeon (southern subspecies) – <i>Geophaps scripta scripta</i>	Figure 7	92.3ha	No**
Habitat for an animal that is vulnerable wildlife – White throated needletail – <i>Hirundapus caudacutus</i>	Figure 8	91.1ha	No**
Habitat for an animal that is endangered wildlife – Koala – <i>Phascolarctos cinereus</i>	Figure 9	161.8ha	No**
Habitat for an animal that is endangered wildlife – Greater Glider – <i>Petauroides Volans</i>	Figure 8	117.6ha	No**
Habitat for an animal that is endangered wildlife – Australian painted snipe – <i>Rostratula australis</i>	Figure 8	29.7ha	No**
Habitat for an animal that is Special Least Concern wildlife – Short-beaked Echidna - <i>Tachy-glossus aculaeatus</i>	Figure 7	127.9ha	No

* Offsets have been provided under the *Environment Protection and Biodiversity Conservation Act 1999* approval 2008/3945.

** These matters are to be assessed under the *Environment Protection and Biodiversity Conservation Act 1999*.

END OF CONDITIONS

Definitions

Key terms and/or phrases used in this document are defined in this section. Applicants should note that where a term is not defined, the definition in the *Environmental Protection Act 1994*, its regulations or environmental protection policies must be used. If a word remains undefined it has its ordinary meaning.

“20th percentile flow” means the 20th percentile of all daily flow measurements (or estimations) of daily flow over a 10 year period for a particular site. The 20th percentile calculation should only include days where flow has been measured (or estimated), i.e. not dry weather days.

“acceptance criteria” means the measures by which the actions implemented to rehabilitate the land are deemed to be complete. The acceptance criteria indicate the success of the rehabilitation outcome or remediation of areas which have been significantly disturbed by the mining activities. Acceptance criteria may include information regarding:

- a) vegetation establishment, survival and succession;
- b) vegetation productivity, sustained growth and structure development;
- c) fauna colonisation and habitat development;
- d) ecosystem processes such as soil development and nutrient cycling, and the recolonisation of specific fauna groups such as collembola, mites and termites which are involved in these processes;
- e) microbiological studies including recolonisation by mycorrhizal fungi, microbial biomass and respiration;
- f) effects of various establishment treatments such as deep ripping, topsoil handling, seeding and fertiliser application on vegetation growth and development;
- g) resilience of vegetation to disease, insect attack, drought and fire; and
- h) vegetation water use and effects on ground water levels and catchment yields.

“acid rock drainage” means any contaminated discharge emanating from a mining activity formed through a series of chemical and biological reactions, when geological strata is disturbed and exposed to oxygen and moisture.

“administering authority” is the agency that administers the *Environmental Protection Act 1994*.

“AEP” means the Annual Exceedance Probability, which is the probability that at least one event in excess of a particular magnitude will occur in any given year.

“affected person” is someone whose drinking water can potentially be impacted as a result of discharges from a dam or their life or property can be put at risk due to dwellings or workplaces being in the path of a dam break flood.

“airblast overpressure” means energy transmitted from the blast site within the atmosphere in the form of pressure waves. The maximum excess pressure in this wave, above ambient pressure is the peak airblast overpressure measured in decibels linear (dBL).

“annual inspection report” means an assessment prepared by a suitably qualified and experienced person containing details of the assessment against the most recent consequence assessment report and design plan (or system design plan):

- a) against recommendations contained in previous annual inspections reports;
- b) against recognised dam safety deficiency indicators;
- c) for changes in circumstances potentially leading to a change in consequence category;
- d) for conformance with the conditions of this authority;
- e) for conformance with the ‘as constructed’ drawings;
- f) for the adequacy of the available storage in each regulated dam, based on an actual observation or observations taken after 31 May each year but prior to 1 November of that year, of accumulated

Environmental authority EPML00586713 Eagle Downs Coal Mine

sediment, state of the containment barrier and the level of liquids in the dam (or network of linked containment systems);

- g) for evidence of conformance with the current operational plan.

“ANZECC” means the *Australian and New Zealand Guidelines for Fresh Marine Water Quality 2000*.

“appropriately qualified person” means a person who has professional qualifications, training, skills or experience relevant to the nominated subject matter and can give authoritative assessment, advice and analysis on performance relative to the subject matter using the relevant protocols, standards, methods or literature.

“authority” means environmental authority under the *Environmental Protection Act 1994*.

“assessed” or “assess” by a suitably qualified and experienced person in relation to a consequence assessment of a regulated structure, means that a statutory declaration has been made by that person and, when taken together with any attached or appended documents referenced in that declaration, all of the following aspects are addressed and are sufficient to allow an independent audit at any time:

- a) exactly what has been assessed and the precise nature of that assessment;
- b) the relevant legislative, regulatory and technical criteria on which the assessment has been based;
- c) the relevant data and facts on which the assessment has been based, the source of that material, and the efforts made to obtain all relevant data and facts; and
- d) the reasoning on which the assessment has been based using the relevant data and facts, and the relevant criteria.

“associated works” in relation to a dam, means:

- a) operations of any kind and all things constructed, erected or installed for that dam; and
- b) any land used for those operations.

“authority” means an environmental authority or a development approval.

“bed and banks” for a waters, river, creek, stream, lake, lagoon, pond, swamp, wetland or dam means land over which the water of the waters, lake, lagoon, pond, swamp, wetland or dam normally flows or that is normally covered by the water, whether permanently or intermittently; but does not include land adjoining or adjacent to the bed and banks that is from time to time covered by floodwater.

“beneficial use” in respect of dams means that the current or proposed owner of the land on which a dam stands, has found a use for that dam that is:

- a) of benefit to that owner in that it adds real value to their business or to the general community;
- b) in accordance with relevant provisions of the *Environmental Protection Act 1994*;
- c) sustainable by virtue of written undertakings given by that owner to maintain that dam; and
- d) the transfer and use have been approved or authorised under any relevant legislation.

“blasting” means the use of explosive materials to fracture:

- a) rock, coal and other minerals for later recovery; or
- b) structural components or other items to facilitate removal from a site or for reuse.

“certification” or “certified” means assessment and approval must be undertaken by a suitably qualified and experienced person in relation to any assessment or documentation required by the *Manual for assessing consequence categories and hydraulic performance of structures*, including design plans, ‘as constructed’ drawings and specifications, construction, operation or an annual report regarding regulated structures, undertaken in accordance with the Board of Professional Engineers of Queensland Policy Certification by Registered Professional Engineers of Queensland.

Environmental authority EPML00586713 Eagle Downs Coal Mine

“chemical” means:

- a) an agricultural chemical product or veterinary chemical product within the meaning of the *Agricultural and Veterinary Chemicals Code Act 1994* (Commonwealth); or
- b) a dangerous good under the dangerous goods code; or
- c) a lead hazardous substance within the meaning of the *Workplace Health and Safety Regulation 1997*; or
- d) a drug or poison in the Standard for the Uniform Scheduling of Drugs and Poisons prepared by the Australian Health Ministers’ Advisory Council and published by the Commonwealth; or
- e) any substance used as, or intended for use as:
 - i) a pesticide, insecticide, fungicide, herbicide, rodenticide, nematocide, miticide, fumigant or related product; or
 - ii) a surface active agent, including, for example, soap or related detergent; or
 - iii) a paint solvent, pigment, dye, printing ink, industrial polish, adhesive, sealant, food additive, bleach, sanitiser, disinfectant, or biocide; or
 - iv) a fertiliser for agricultural, horticultural or garden use; or
 - i) mineral processing or treatment of metal, pulp and paper, textile, timber, water or wastewater; or
 - ii) manufacture of plastic or synthetic rubber.

“commercial place” means a work place used as an office or for business or commercial purposes, which is not part of the mining activity and does not include employees accommodation or public roads.

“competent person” means a person with the demonstrated skill and knowledge required to carry out the task to a standard necessary for the reliance upon collected data or protection of the environment.

“consequence” in relation to a structure as defined, means the potential for environmental harm resulting from the collapse or failure of the structure to perform its primary purpose of containing, diverting or controlling flowable substances.

“consequence category” means a category, either low, significant or high, into which a dam is assessed as a result of the application of tables and other criteria in the *Manual for assessing consequence categories and hydraulic performance of structures*.

“construction” or **“constructed”** in relation to a dam includes building a new dam and modifying or lifting an existing dam, but does not include investigations and testing necessary for the purpose of preparing a design plan.

“contaminate” means to render impure by contact or mixture.

“contaminated” means the substance has come into contact with a contaminant.

“contaminant” – as defined in section 11 of the *Environmental Protection Act 1994*.

“control measure” means any action or activity that can be used to prevent or eliminate a hazard or reduce it to an acceptable level.

“dam” means a land-based structure or a void that contains, diverts or controls flowable substances, and includes any substances that are thereby contained, diverted or controlled by that land-based structure or void and associated works.

“design plan” is a document setting out how all identified consequence scenarios are addressed in the planned design and operation of a regulated structure.

Environmental authority EPML00586713 Eagle Downs Coal Mine

“design storage allowance” or “DSA” means an available volume, estimated in accordance with the *Manual for Assessing Consequence Categories and Hydraulic Performance of Structures (ESR/2016/1933)* published by the administering authority, must be provided in a dam as at 1 November each year in order to prevent a discharge from that dam to an annual exceedance probability specified in that manual.

“disturbed” means any area that has had its natural state altered by the action or interference of carrying out an activity associated with the exploration project.

“disturbance” of land includes:

- a) compacting, removing, covering, exposing or stockpiling of earth
- b) removal or destruction of vegetation or topsoil or both to an extent where the land has been made susceptible to erosion
- c) carrying out mining within a watercourse, waterway, wetland or lake
- d) the submersion of areas by tailings or hazardous contaminant storage and dam/structure walls
- e) temporary infrastructure, including any infrastructure (roads, tracks, bridges, culverts, dam/structures, bores, buildings, fixed machinery, hardstand areas, airstrips, helipads etc.) which is to be removed after the mining activity has ceased
- f) releasing of contaminants into the soil, or underlying geological strata.

However, the following areas are not included when calculating areas of ‘disturbance’.

- a) Areas off lease (e.g. roads or tracks which provide access to the mining lease)
- b) Areas previously disturbed which have achieved the rehabilitation outcomes
- c) By agreement with the administering authority, areas previously disturbed which have not achieved the rehabilitation objective(s) due to circumstances beyond the control of the mine operator (such as climatic conditions)
- d) Areas under permanent infrastructure. Permanent infrastructure includes any infrastructure (roads, tracks, bridges, culverts, dam/structures, bores, buildings, fixed machinery, hardstand areas, airstrips, helipads etc.) which is to be left by agreement with the landowner.
- e) Disturbance that pre-existed the grant of the tenure.

“effluent” means treated waste water discharged from sewage treatment plants.

“emergency action plan” means documentation forming part of the operational plan held by the holder or a nominated responsible officer, that identifies emergency conditions that sets out procedures and actions that will be followed and taken by the dam owner and operating personnel in the event of an emergency. The actions are to minimise the risk and consequences of failure, and ensure timely warning to affected persons and the implementation of protection measures. The plan must require dam owners to annually review and update contact information where required.

“environmental authority” means an environmental authority granted under the *Environmental Protection Act 1994*.

“environmental authority holder” means the holder of this environmental authority.

“environmentally relevant activity” means an environmentally relevant activity as defined under Section 18 of the *Environmental Protection Act 1994* and listed under Schedule 2 or Schedule 2A of the *Environmental Protection Regulation 2008*.

“fill areas” are areas that as a result of longwall mining activity, experience a vertical displacement of the ground surface and are mitigated by filling.

“flare pit” means containment area where any hydrocarbon that is discovered in an over-pressured reservoir during a drilling operation is diverted to, and combusted. The flare pit is only used during the drilling and work over process on a petroleum well.

“flowable substance” means matter or a mixture of materials which can flow under any conditions potentially affecting that substance. Constituents of a flowable substance can include water, other liquids fluids or solids, or a mixture that includes water and any other liquids fluids or solids either in solution or suspension.

“general waste” means waste other than regulated waste.

“hazardous waste” means a substance, whether liquid, solid or gaseous that, if improperly treated, stored, disposed of or otherwise managed, is likely to cause environmental harm.

“hydraulic performance” means the capacity of a regulated dam to contain or safely pass flowable substances based on the design criteria for the relevant consequence category in the *Manual for assessing consequence categories and hydraulic performance of structures*.

“infrastructure” means water storage dams, levees, roads and tracks, buildings and other structures built for the purpose of the mining activity.

“ $L_{A\ 10, \text{adj}, 10 \text{ mins}}$ ” means the A-weighted sound pressure level, (adjusted for tonal character and impulsiveness of the sound) exceeded for 10% of any 10-minute measurement period, using Fast response.

“ $L_{A\ 1, \text{adj}, 10 \text{ mins}}$ ” means the A-weighted sound pressure level, (adjusted for tonal character and impulsiveness of the sound) exceeded for 1% of any 10-minute measurement period, using Fast response

“ $L_{A, \text{max adj}, T}$ ” means the average maximum A-weighted sound pressure level, adjusted for noise character and measured over any 10 minute period, using Fast response.

“land” in the “land schedule” of this document means land excluding waters and the atmosphere., that is, the term has a different meaning from the term as defined in the *Environmental Protection Act 1994*. For the purposes of the *Acts Interpretation Act 1954*, it is expressly noted that the term ‘land’ in this environmental authority relates to physical land and not to interests in land.

“land capability” as defined in the *Technical Guidelines for the Environmental Management of Exploration and Mining in Queensland (DME 1995)*.

“land suitability” as defined in the *Technical Guidelines for the Environmental Management of Exploration and Mining in Queensland (DME 1995)*.

“land use” means the selected post mining use of the land, which is planned to occur after the cessation of mining operations.

“low consequence dam” means any dam that is not a high or significant consequence category as assessed using the *Manual for assessing consequence categories and hydraulic performance of structures*.

“mandatory reporting level” or “MRL” means a warning and reporting level determined in accordance with the criteria in the *Manual for assessing consequence categories and hydraulic performance of structures*.

“manual” means the *Manual for assessing consequence categories and hydraulic performance of structures published by the administering authority, as amended from time to time*.

“mg/L” means milligrams per litre.

“Mine affected water”

a) means the following types of water:

- i. pit water, tailings dam water, processing plant water;
- ii. water contaminated by a mining activity which would have been an environmentally relevant activity under Schedule 2 of the Environmental Protection Regulation 2019 if it had not formed part of the mining activity;
- iii. rainfall runoff which has been in contact with any areas disturbed by mining activities which have not yet been rehabilitated, excluding rainfall runoff discharging through release points associated with erosion and

Environmental authority EPML00586713 Eagle Downs Coal Mine

sediment control structures that have been installed in accordance with the standards and requirements of an Erosion and Sediment Control Plan to manage such runoff, provided that this water has not been mixed with pit water, tailings dam water, processing plant water or workshop water;

iv. groundwater which has been in contact with any areas disturbed by mining activities which have not yet been rehabilitated;

v. groundwater from the mine's dewatering activities; or

vi. a mix of mine affected water (under any of paragraphs i to v) and other water.

b) does not include surface water runoff which, to the extent that it has been in contact with areas disturbed by mining activities that have not yet been completely rehabilitated, has only been in contact with:

i. land that has been rehabilitated to a stable landform and either capped or revegetated in accordance with the acceptance criteria set out in the environmental authority but only still awaiting maintenance and monitoring of the rehabilitation over a specified period of time to demonstrate rehabilitation success; or

ii. land that has partially been rehabilitated and monitoring demonstrates the relevant part of the landform with which the water has been in contact does not cause environmental harm to waters or groundwater, for example:

a. areas that are been capped and have monitoring data demonstrating hazardous material adequately contained with the site;

b. evidence provided through monitoring that the relevant surface water would have met the water quality parameters for mine affected water release limits in this environmental authority, if those parameters had been applicable to the surface water runoff; or

iii. both.

“mine water” means process water and contaminated stormwater.

“natural flow” means the flow of water through waters caused by nature.

“native vegetation” means vegetation that occurs naturally in a certain area.

“noxious” means harmful or injurious to health or physical well-being.

“offensive” means causing reasonable offence or displeasure; is disagreeable to the sense; disgusting, nauseous or repulsive, other than trivial harm.

“operational land” means the land associated with the project for which this environmental authority has been issued.

“operational plan” includes:

- a) Normal operating procedures and rules (including clear documentation and definition of process inputs in the DSA);
- b) Contingency and emergency action plans including operating procedures designed to avoid and/or minimise environmental impacts including threats to human life resulting from any overtopping or loss of structural integrity of the regulated structure.

“peak particle velocity (ppv)” means a measure of ground vibration magnitude which is the maximum rate of change of ground displacement with time, usually measured in millimetres/second (mms^{-1}).

“progressive rehabilitation” means rehabilitation (defined below) undertaken progressively or a staged approach to rehabilitation as mining operations are ongoing.

“receiving environment” means all groundwater, surface water, land, and sediments that are not disturbed areas authorised by this environmental authority.

Environmental authority EPML00586713 Eagle Downs Coal Mine

“receiving waters” means the waters into which this environmental authority authorises releases of mine affected water.

“recommencement of production activities” means the following on the mining tenures relevant to the Environmentally Relevant Activity and the location details of this environmental authority:

- a) mining coal from the coal measures;
- b) rehabilitation activities with the exception of rehabilitation of disturbance resultant from exploration activities; and
- c) the commencement of operation of the ROWTP, mine water dam, brine dam or the DREA catch dam.

For the avoidance of doubt, this definition does not include any activities required for the continued management of the site the subject of the environmental authority in care and maintenance, the construction of any temporary infrastructure or the recommencement of construction of the underground mine drifts.

“register of regulated structures” includes:

- a) Date of entry in the register;
- b) Name of the structure, its purpose and intended/actual contents;
- c) The consequence category of the dam as assessed using the *Manual for assessing consequence categories and hydraulic performance of structures*;
- d) Dates, names, and reference for the design plan plus dates, names, and reference numbers of all document(s) lodged as part of a design plan for the dam;
- e) Name and qualifications of the suitably qualified and experienced person who certified the design plan and ‘as constructed’ drawings;
- f) For the regulated dam, other than in relation to any levees –
 - i. The dimensions (metres) and surface area (hectares) of the dam measured at the footprint of the dam;
 - ii. Coordinates (latitude and longitude in GDA94) within five metres at any point from the outside of the dam including its storage area;
 - iii. Dam crest volume (megalitres);
 - iv. Spillway crest level (metres AHD);
 - v. Storage rating table of stored volume versus level (metres AHD);
 - vi. Design storage allowance (megalitres) and associated level of the dam (metres AHD);
 - vii. Mandatory reporting level (metres AHD).
- g) The design plan title and reference relevant to the dam;
- h) The date construction was certified as compliant with the design plan;
- i) The name and details of the suitably qualified and experienced person who certified that the constructed dam was compliant with the design plan;
- j) Details of the composition and construction of any liner;
- k) The system for the detection of any leakage through the floor and sides of the dam;
- l) Dates when the regulated dam underwent and annual inspection for structural and operational adequacy, and to ascertain the available storage volume for 1 November of any year;
- m) Dates when recommendations and actions arising from the annual inspection were provided to the administering authority;
- n) Dam water quality as obtained from any monitoring required under this authority as at 1 November of each year.

“regulated structure” means any structure in the significant or high consequence category as assessed using the *Manual for assessing consequence categories and hydraulic performance of structures* published by the administering authority. A regulated structure does not include:

- A fabricated or manufactured tank or container, designed and constructed to an Australian Standard that deals with strength and structural integrity of that tank or container;

Environmental authority EPML00586713 Eagle Downs Coal Mine

- A sump or earthen pit used to store residual drilling material and drilling fluid only for the duration of drilling and well completion activities;
- A flare pit.

“regulated waste” as defined within the *Waste Reduction and Recycling Act 2011*.

“rehabilitation” the process of reshaping and revegetating land to restore it to a stable landform.

“release event” means a surface water discharge from mine affected water storages or contaminated areas on the licensed place.

“representative” means a sample set which covers the variance in monitoring or other data either due to natural changes or operational phases of the mining activities.

“residual drilling material” means waste drilling materials including muds and cuttings or cement returns from well holes and which have been left behind after the drilling fluids are pumped out.

“residual ponding areas” as depicted in Figure 3, are areas that as a result of longwall mining activity, experience a vertical displacement of ground surface and will result in ponding of surface water for more than 10% of a 12 month period.

“RO product water” reverse osmosis product water from the Reverse Osmosis Water Treatment Plant.

“ROWTP” means Reverse Osmosis Water Treatment Plant.

“saline drainage” the movement of waters, contaminated with salt(s), as a result of the mining activity.

“self-sustaining” means not requiring on-going intervention and maintenance to maintain functional riverine processes and characteristics.

“sensitive place” means:

- a dwelling, residential allotment, mobile home or caravan park, residential marina or other residential premises;
- a motel, hotel or hostel;
- an educational institution;
- a medical centre or hospital;
- a protected area under the *Nature Conservation Act 1992*, the *Marine Parks Act 2004* or a World Heritage Area; or
- a public park or gardens.

Note: The definition of ‘sensitive place’ and ‘commercial place’ is based on Schedule 1 of the *Environmental Protection (Noise) Policy 2008*.

“sewage” means the used water of person’s to be treated at a sewage treatment plant.

“spillway” means a weir, channel, conduit, tunnel, gate or other structure designed to permit discharges from the dam, normally under flood conditions or in anticipation of flood conditions.

“stable” in relation to land, means land form dimensions are or will be stable within tolerable limits now and in the foreseeable future. Stability includes consideration of geotechnical stability, settlement and consolidation allowances, bearing capacity (trafficability), erosion resistance and geochemical stability with respect to seepage, leachate and related contaminant generation.

“stormwater” means all surface water runoff from rainfall.

Environmental authority EPML00586713 Eagle Downs Coal Mine

“suitably qualified and experienced person” means a person who is a Registered Professional Engineer of Queensland (RPEQ) under the provisions of the *Professional Engineers Act 2002*, and has demonstrated competency and relevant experience:

- for regulated dams, an RPEQ who is a civil engineer with the required qualifications in dam safety and dam design
- for regulated levees, an RPEQ who is a civil engineer with the required qualifications in the design of flood protection embankments.

Note: It is permissible that a suitably qualified and experienced person obtain subsidiary certification from an RPEQ who has demonstrated competence and relevant experience in either geomechanics, hydraulic design or engineering hydrology.

“system design plan” means a plan that manages an integrated containment system that shares the required DSA and/or ESS volume across the integrated containment system.

“void” means any constructed, open excavation in the ground.

“waste” as defined in section 13 of the *Environmental Protection Act 1994*.

“waste management hierarchy” has the meaning given by the *Waste Reduction and Recycling Act 2011*.

“water” is defined under Schedule 4 of the *Water Act 2000*

“waste water” means used water from the activity, process water or contaminated storm water.

“water quality” means the chemical, physical and biological condition of water.

“waters” includes all or any part of a river, stream, lake, lagoon, pond, swamp, wetland, unconfined surface water, unconfined natural or artificial watercourse, bed and bank of any waters, dams, non-tidal or tidal waters (including the sea), storm water channel, storm water drain, roadside gutter, storm water runoff, and groundwater.

“WaTERS” means the administering authority’s Water Tracking and Electronic Reporting System (WaTERS) to submit surface and ground water monitoring and tracking data online, which can be accessed via following web link - www.business.qld.gov.au/industries/mining-energy-water/water/maps-data/submit-data.

“wet season” means the time of year, covering one or more months, when most of the average annual rainfall in a region occurs. For the purposes of DSA determination this time of year is deemed to extend from 1 November in one year to 31 May in the following year inclusive.

“µg/L” means micrograms per litre.

END OF DEFINITIONS

ATTACHMENTS

Figure 1 (Surface Water Release Points and Groundwater Monitoring Locations)

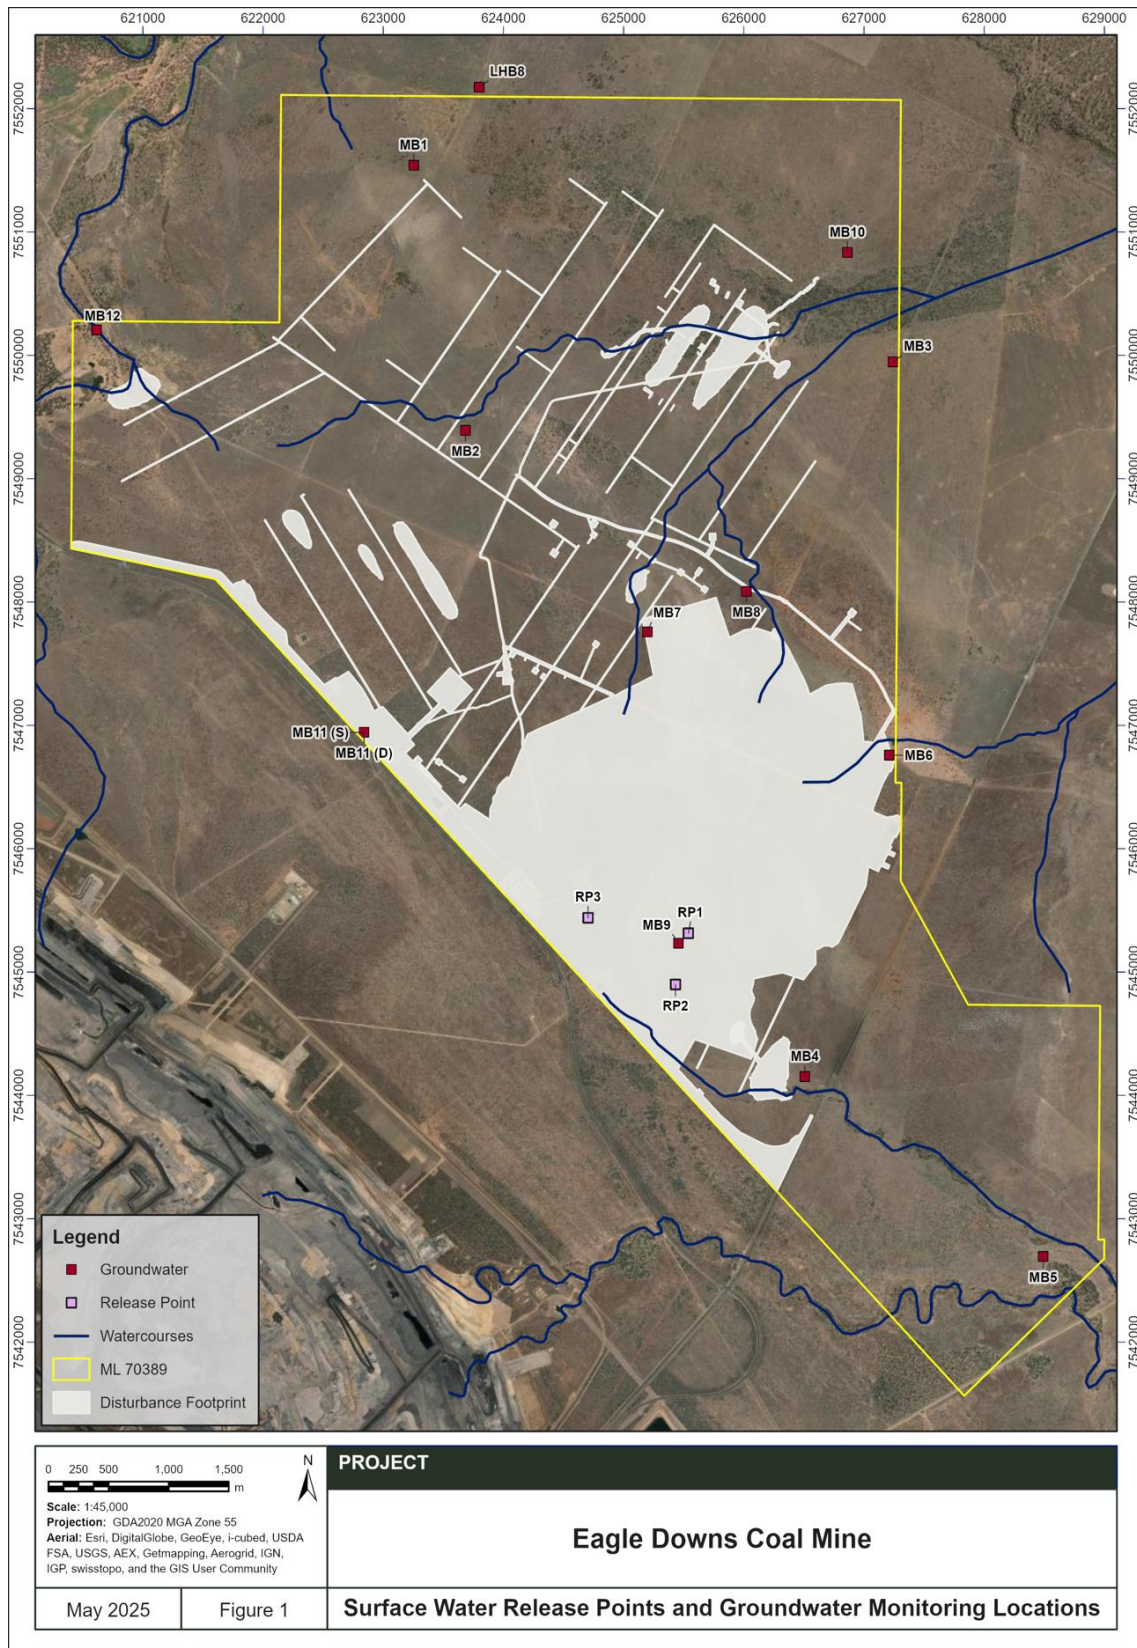


Figure 2 (Maximum disturbance area)

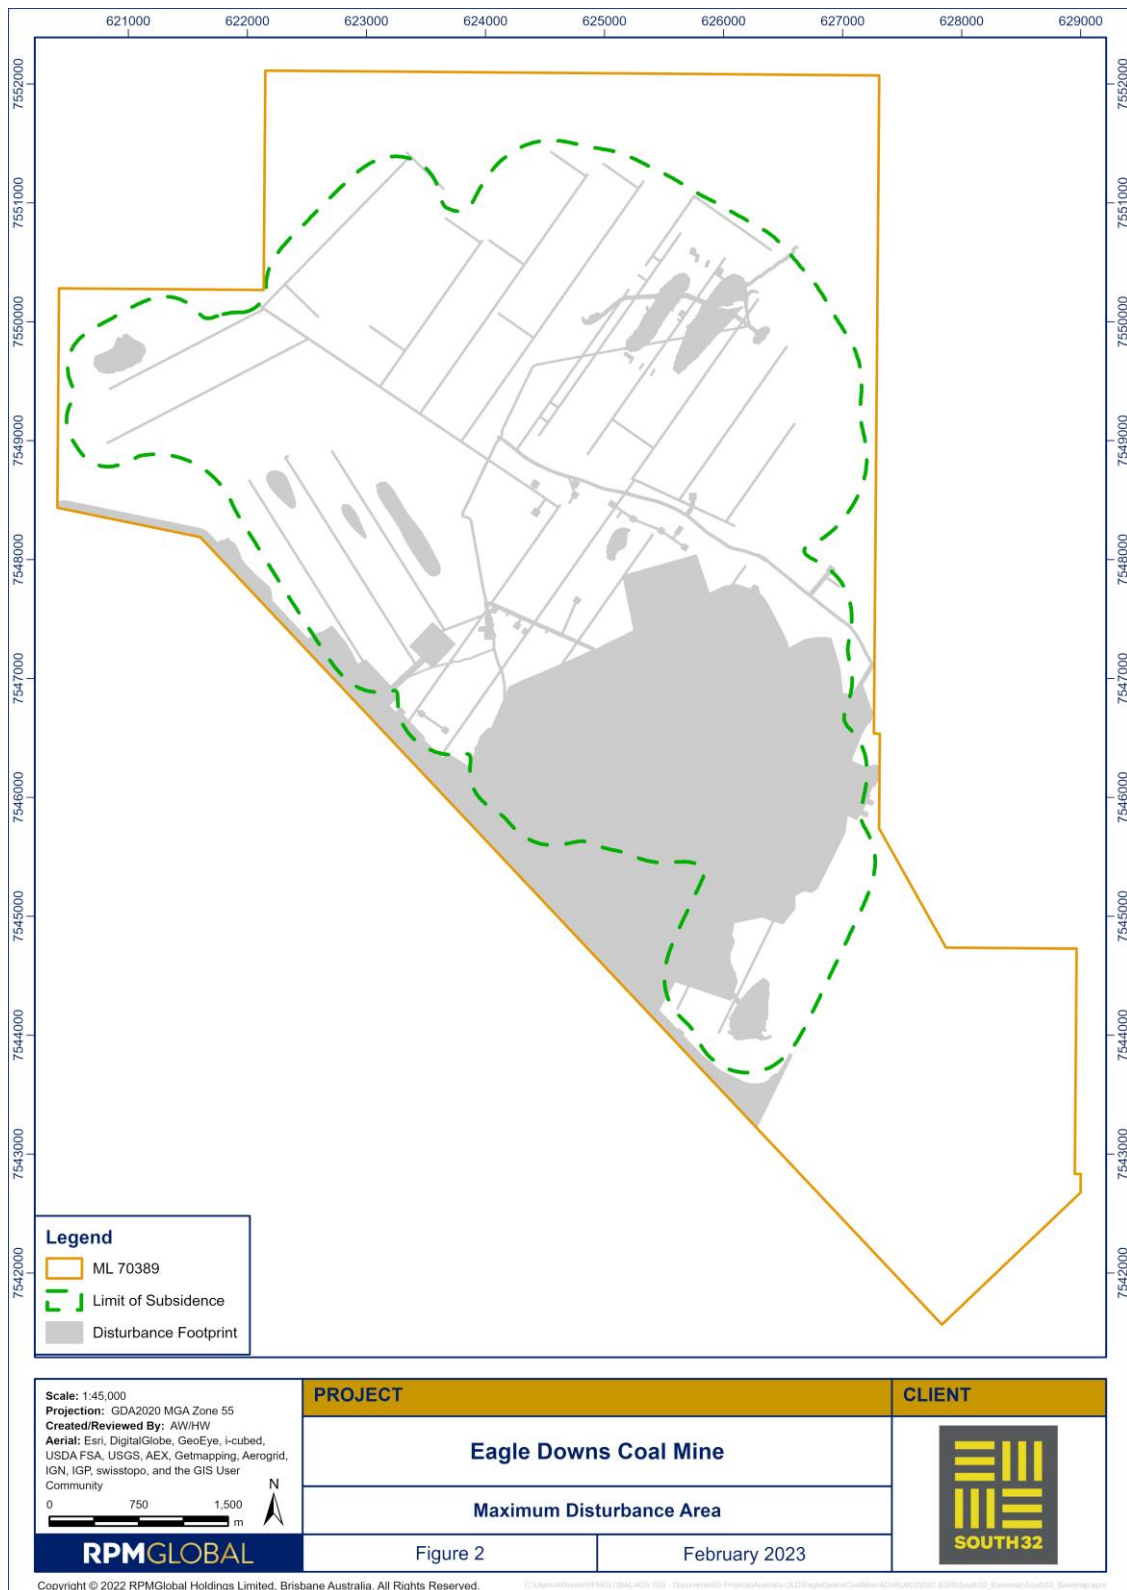


Figure 3 (Maximum disturbance area – detail)

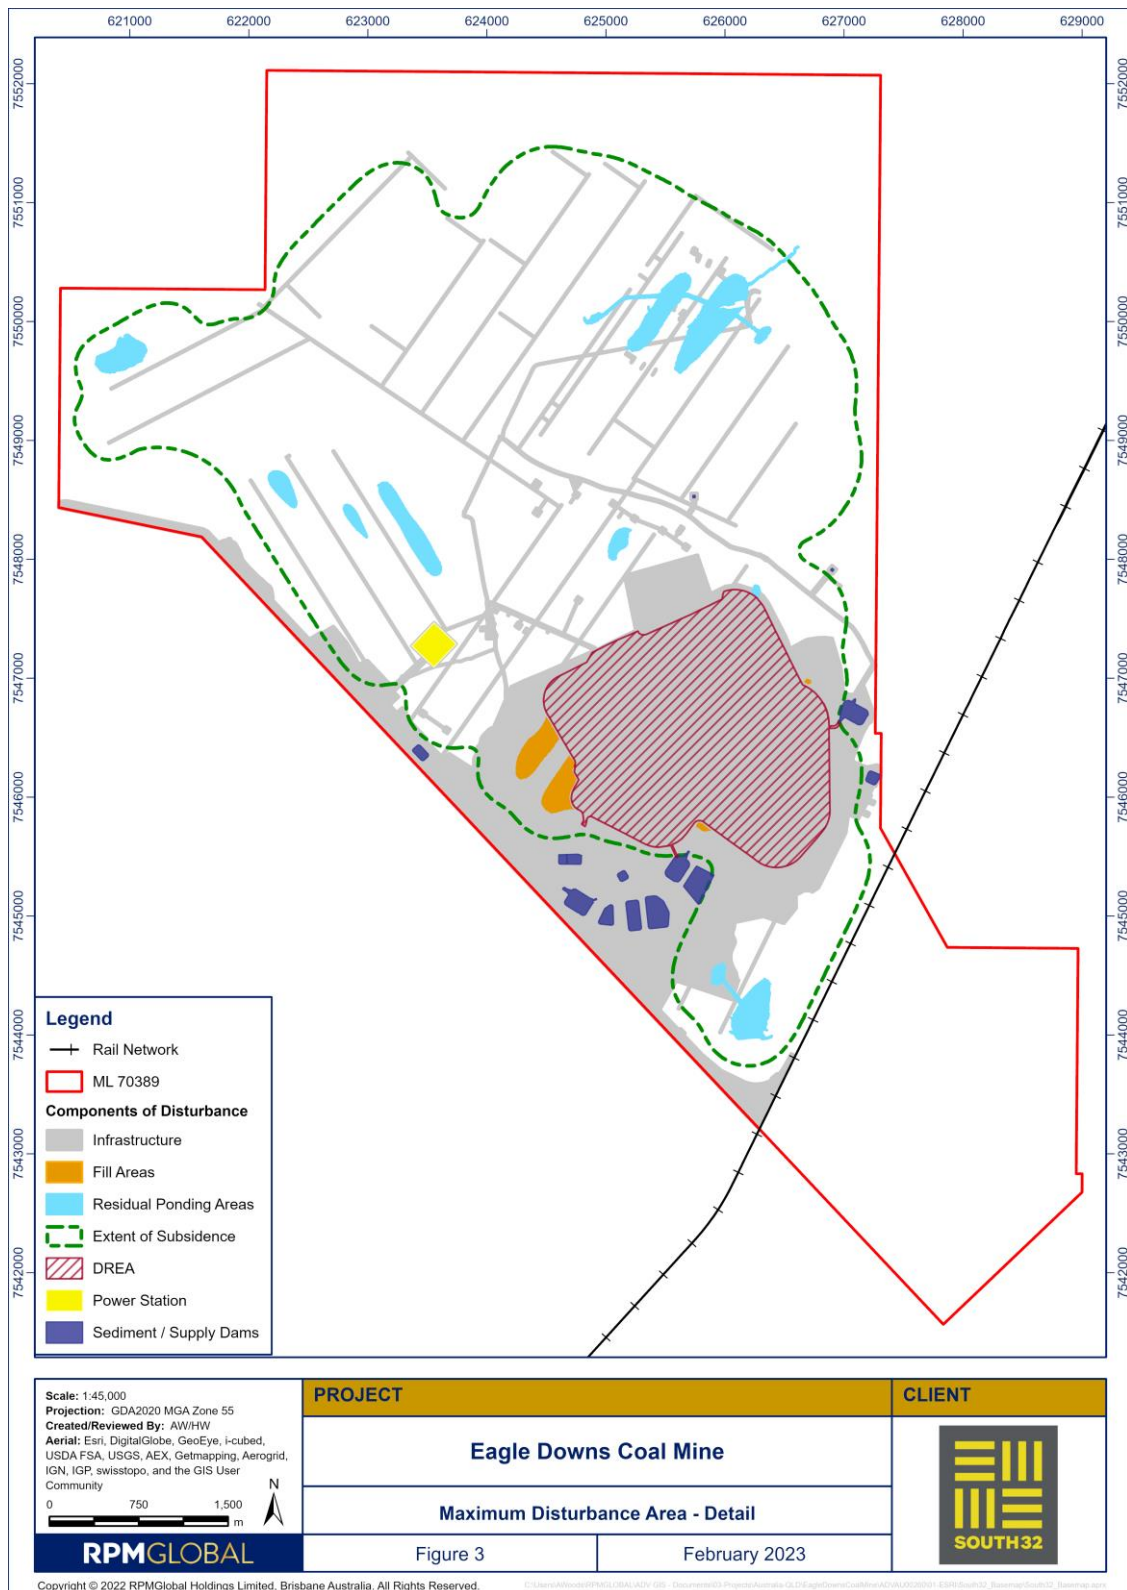


Figure 4 (Monitoring Points)


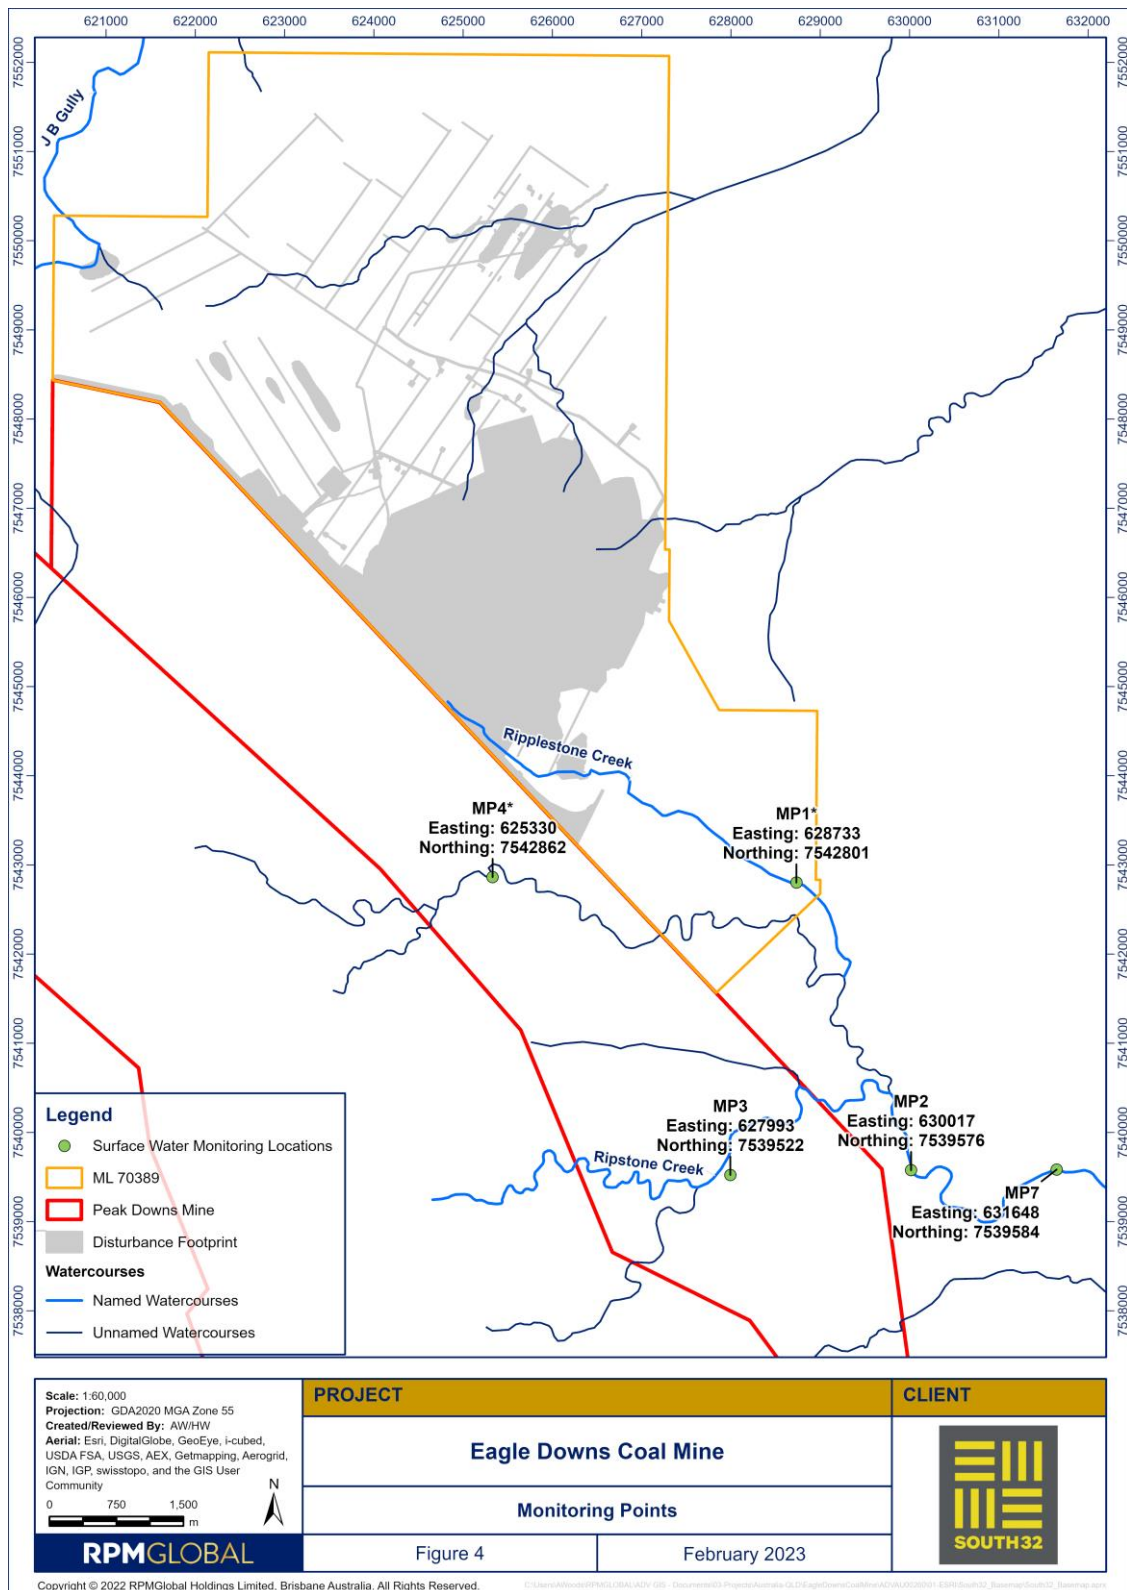


Figure 5 (Bluegrass and Brigalow Threatened Ecological Communities)

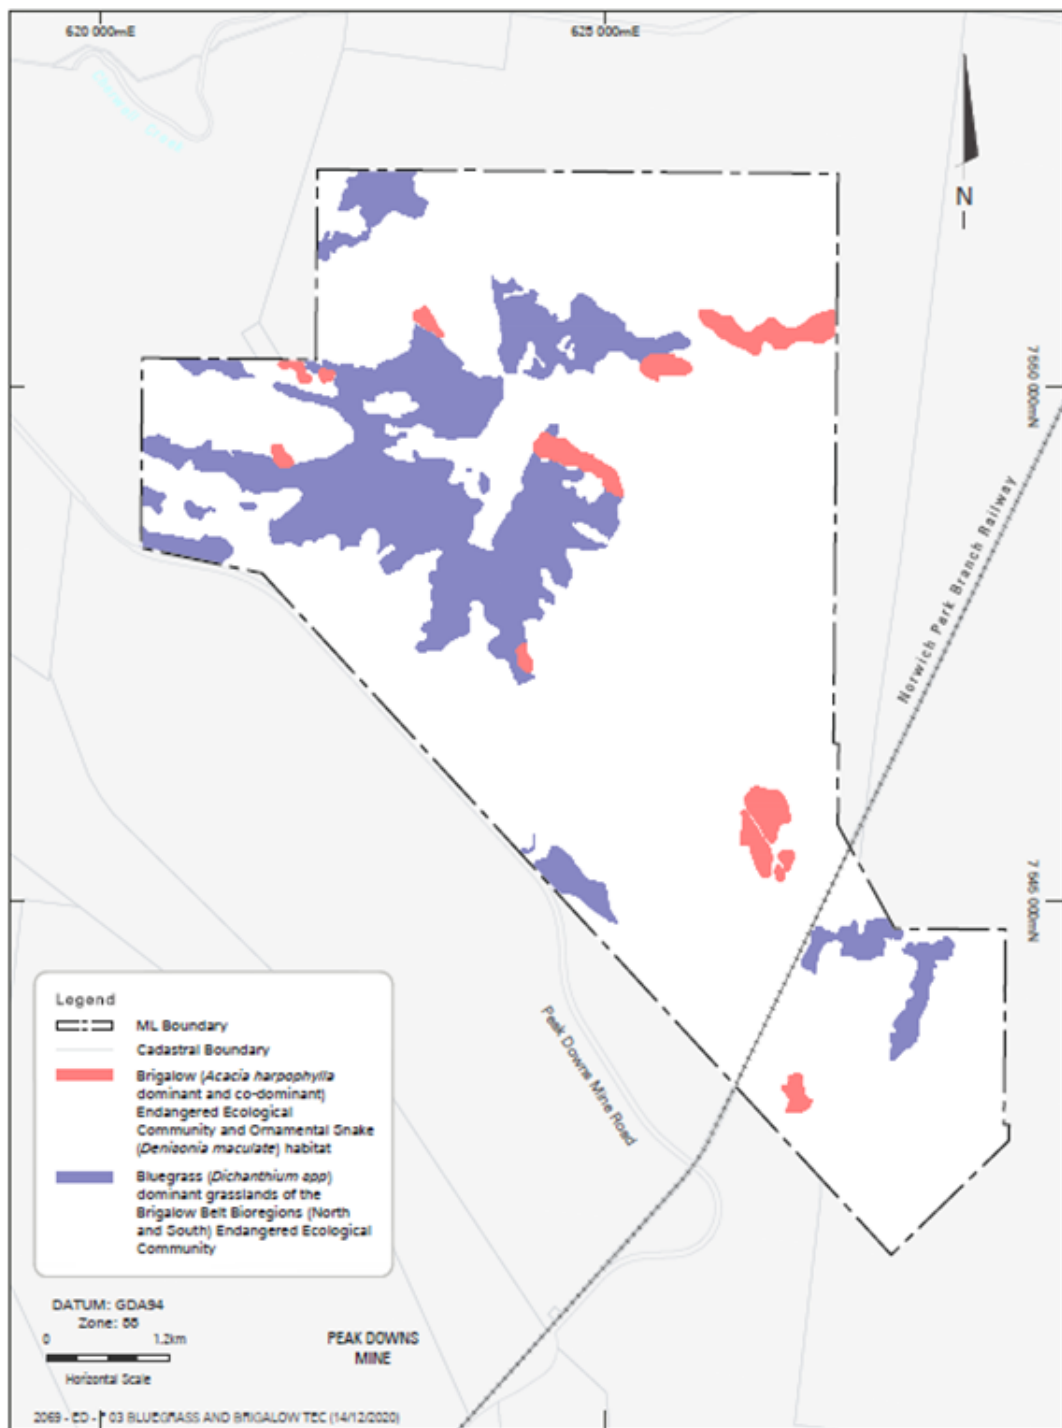

Hansen Bailey
ENVIRONMENTAL CONSULTANTS

EAGLE DOWNS ENVIRONMENTAL AUTHORITY
AMENDMENT APPLICATION

Bluegrass and Brigalow
Threatened Ecological Communities

FIGURE 5

Figure 6 (Prescribed Environmental Matter – Regional Ecosystems)

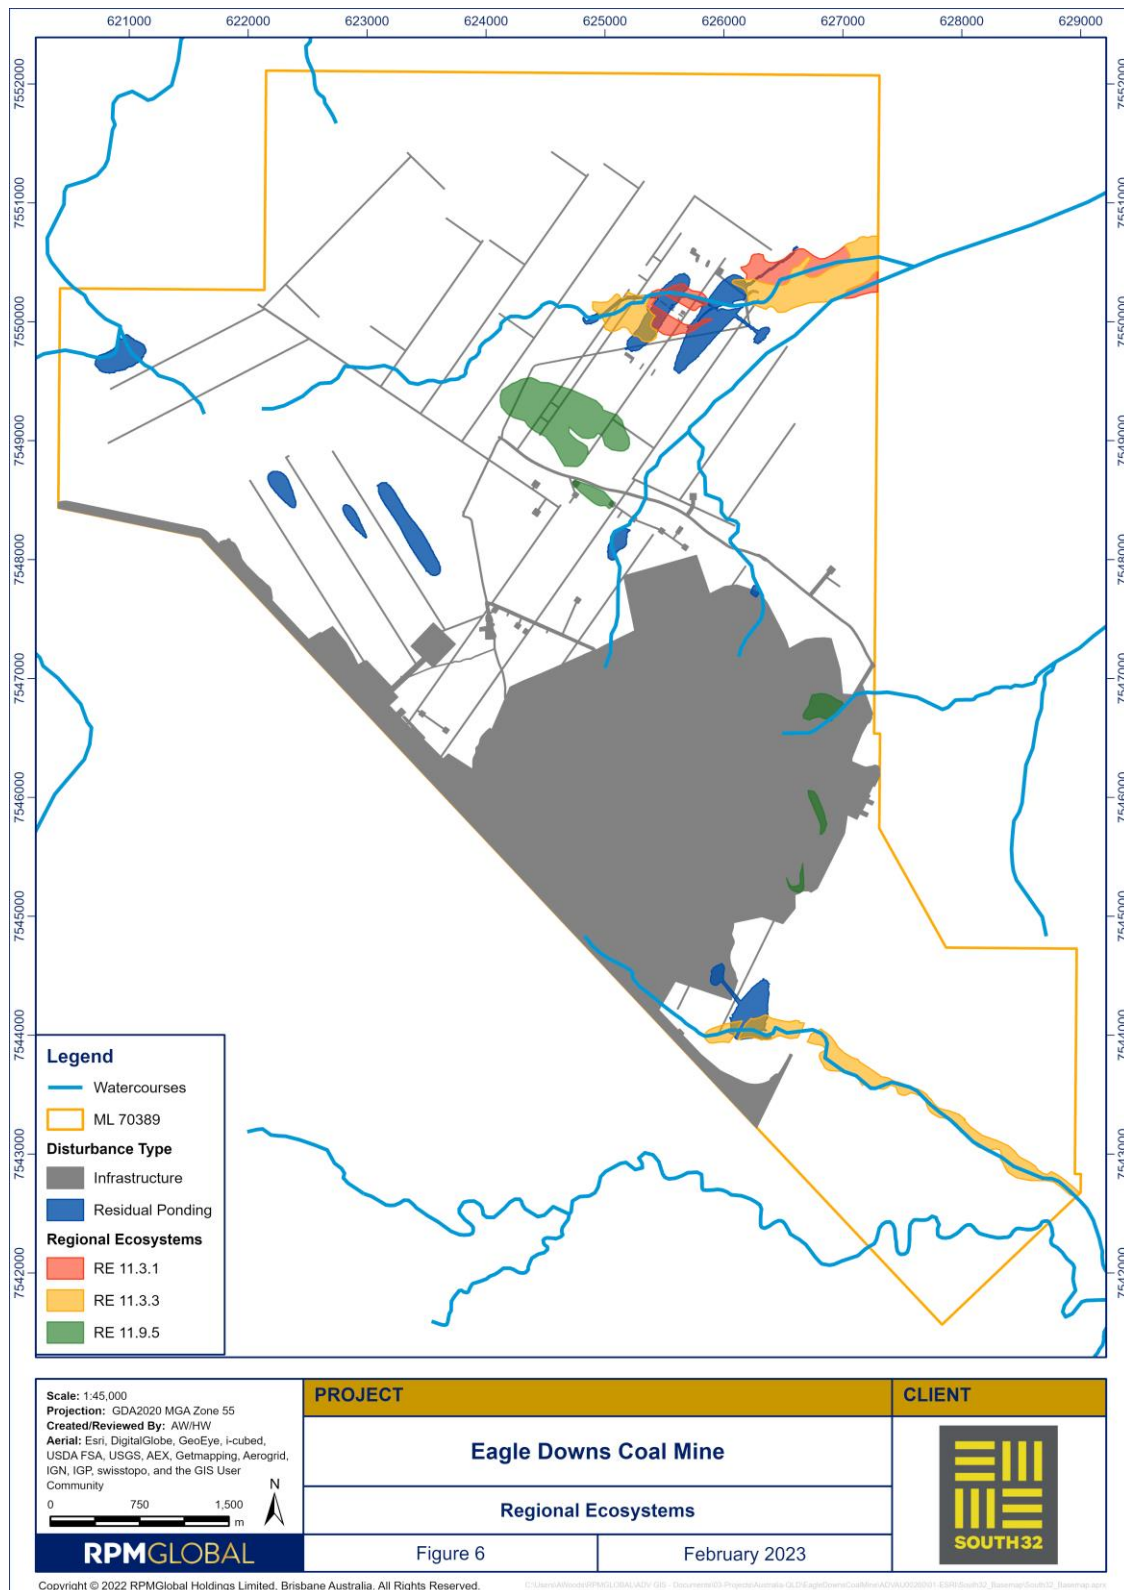


Figure 7 (Prescribed Environmental Matter – Short-Beaked Echidna, Squatter Pigeon)

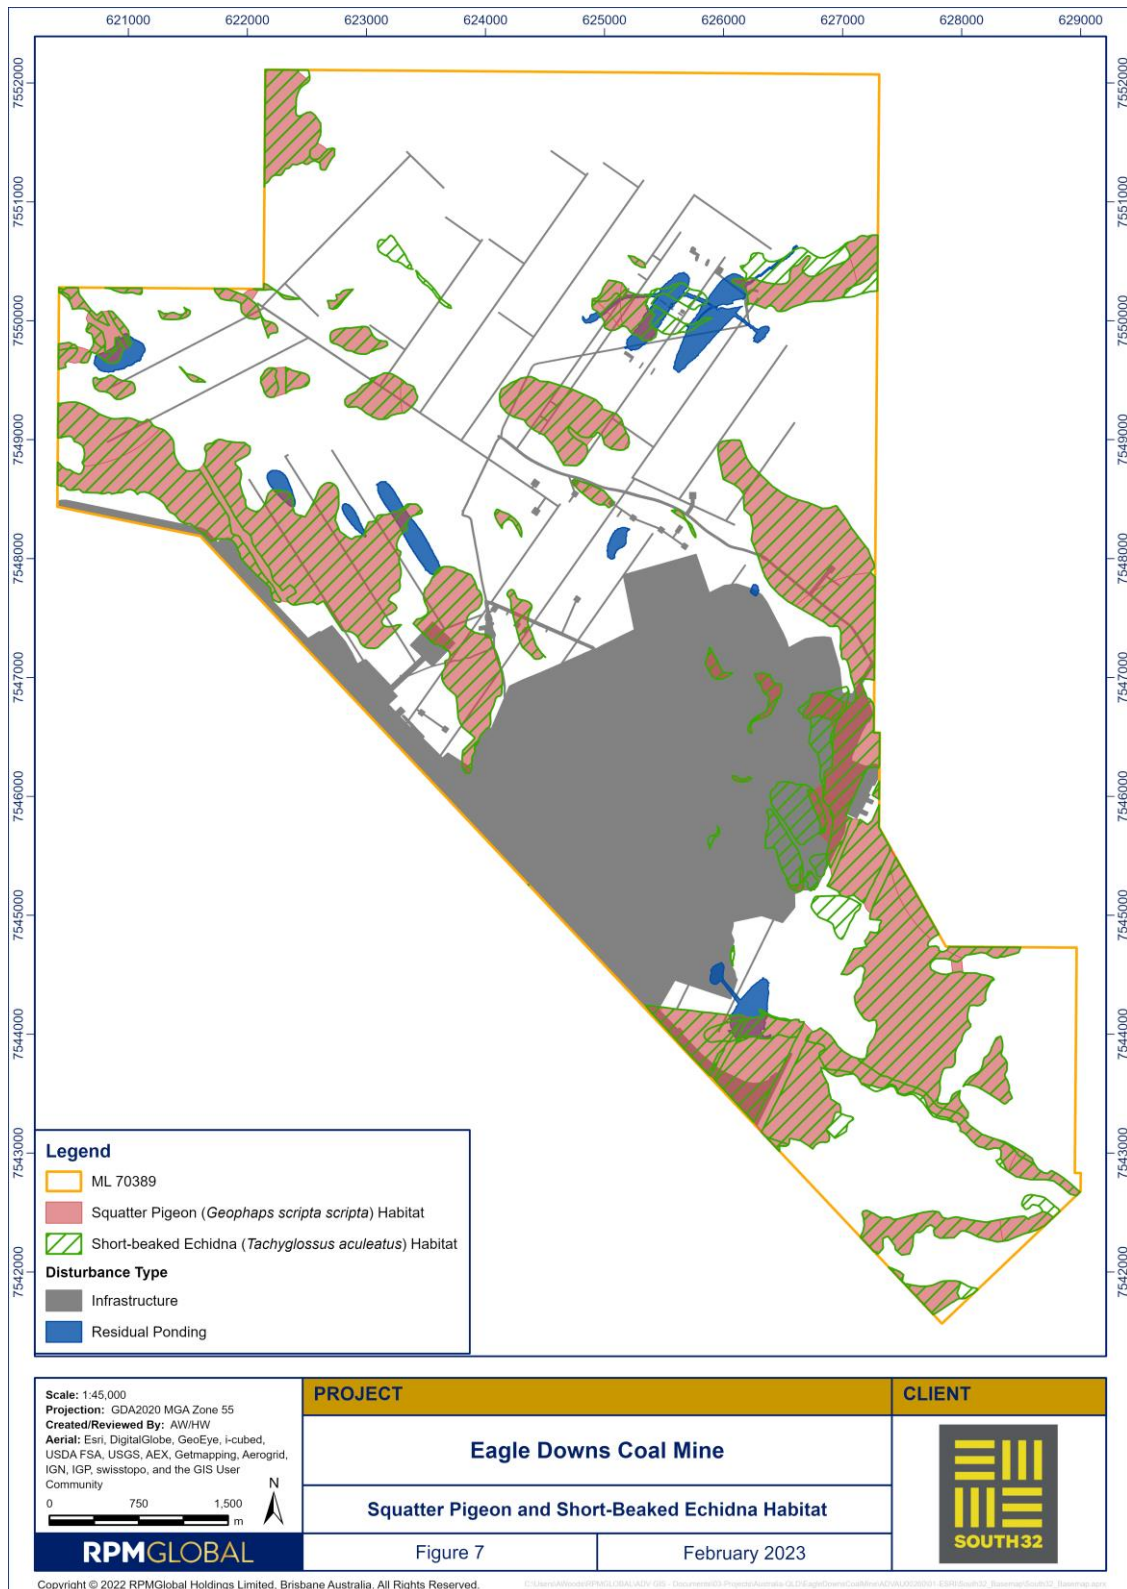


Figure 8 (Prescribed Environmental Matter – Australian Painted Snipe, Greater Glider and White-throated Needle-tail)

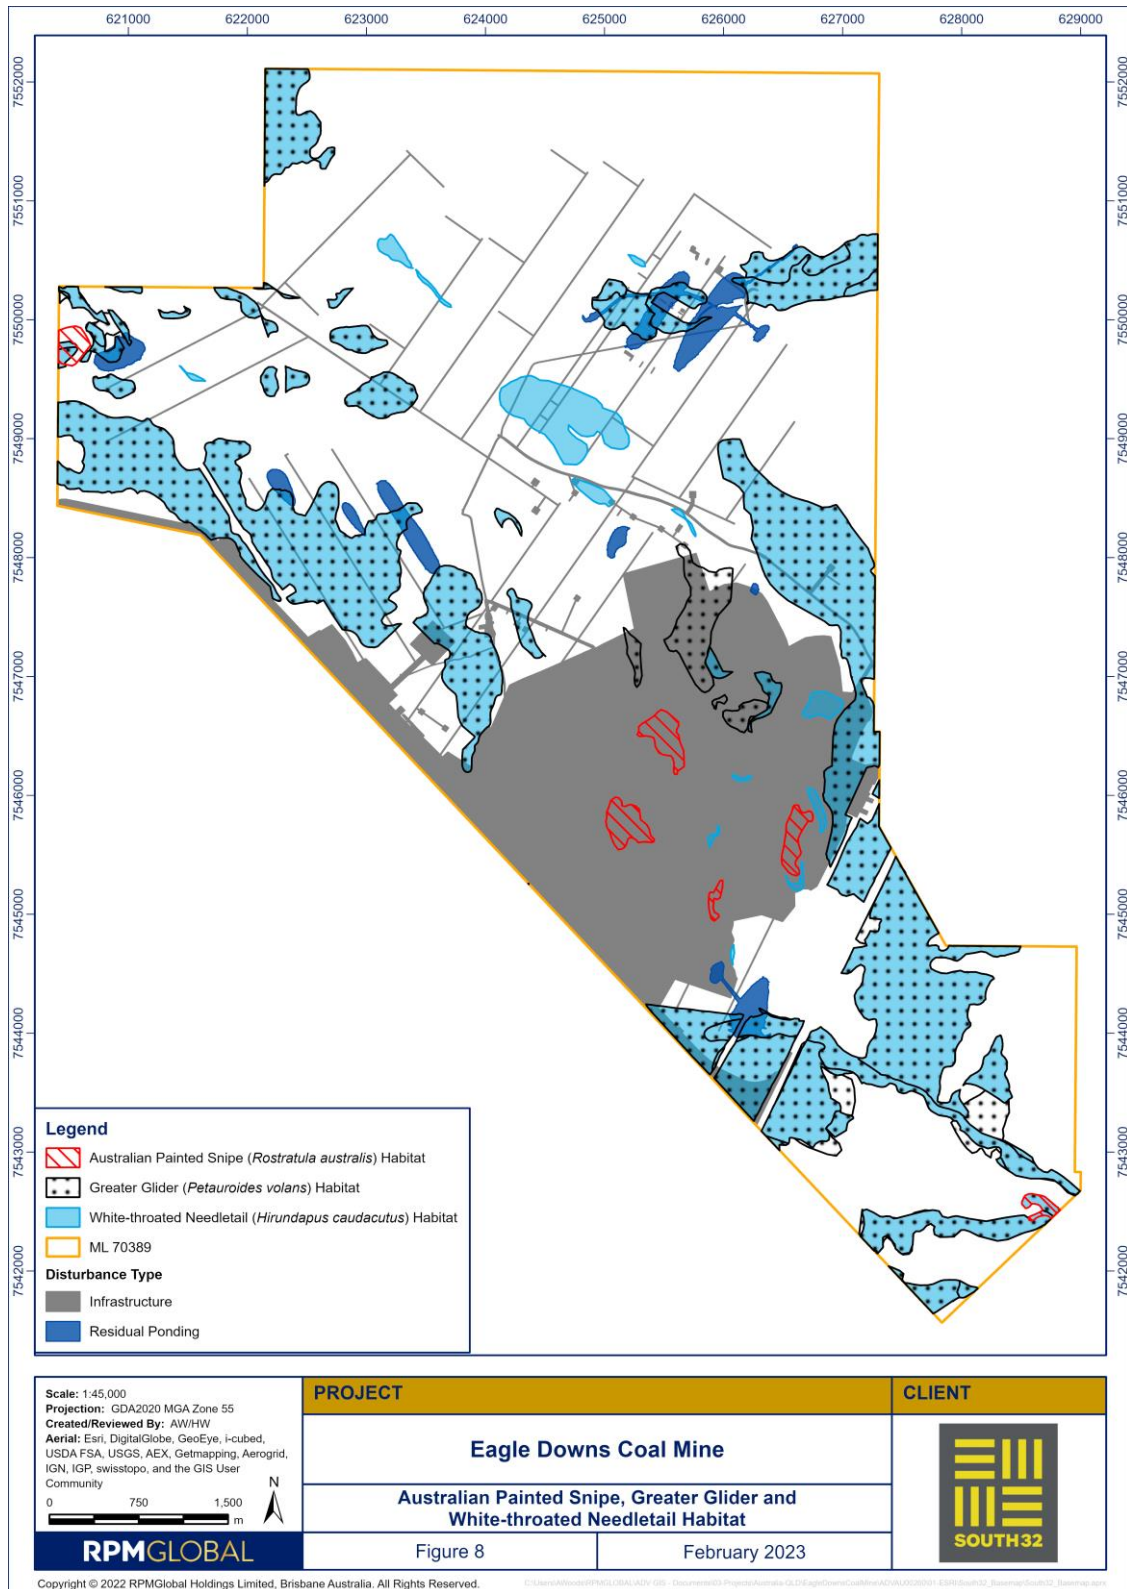


Figure 9 (Prescribed Environmental Matter – Koala)


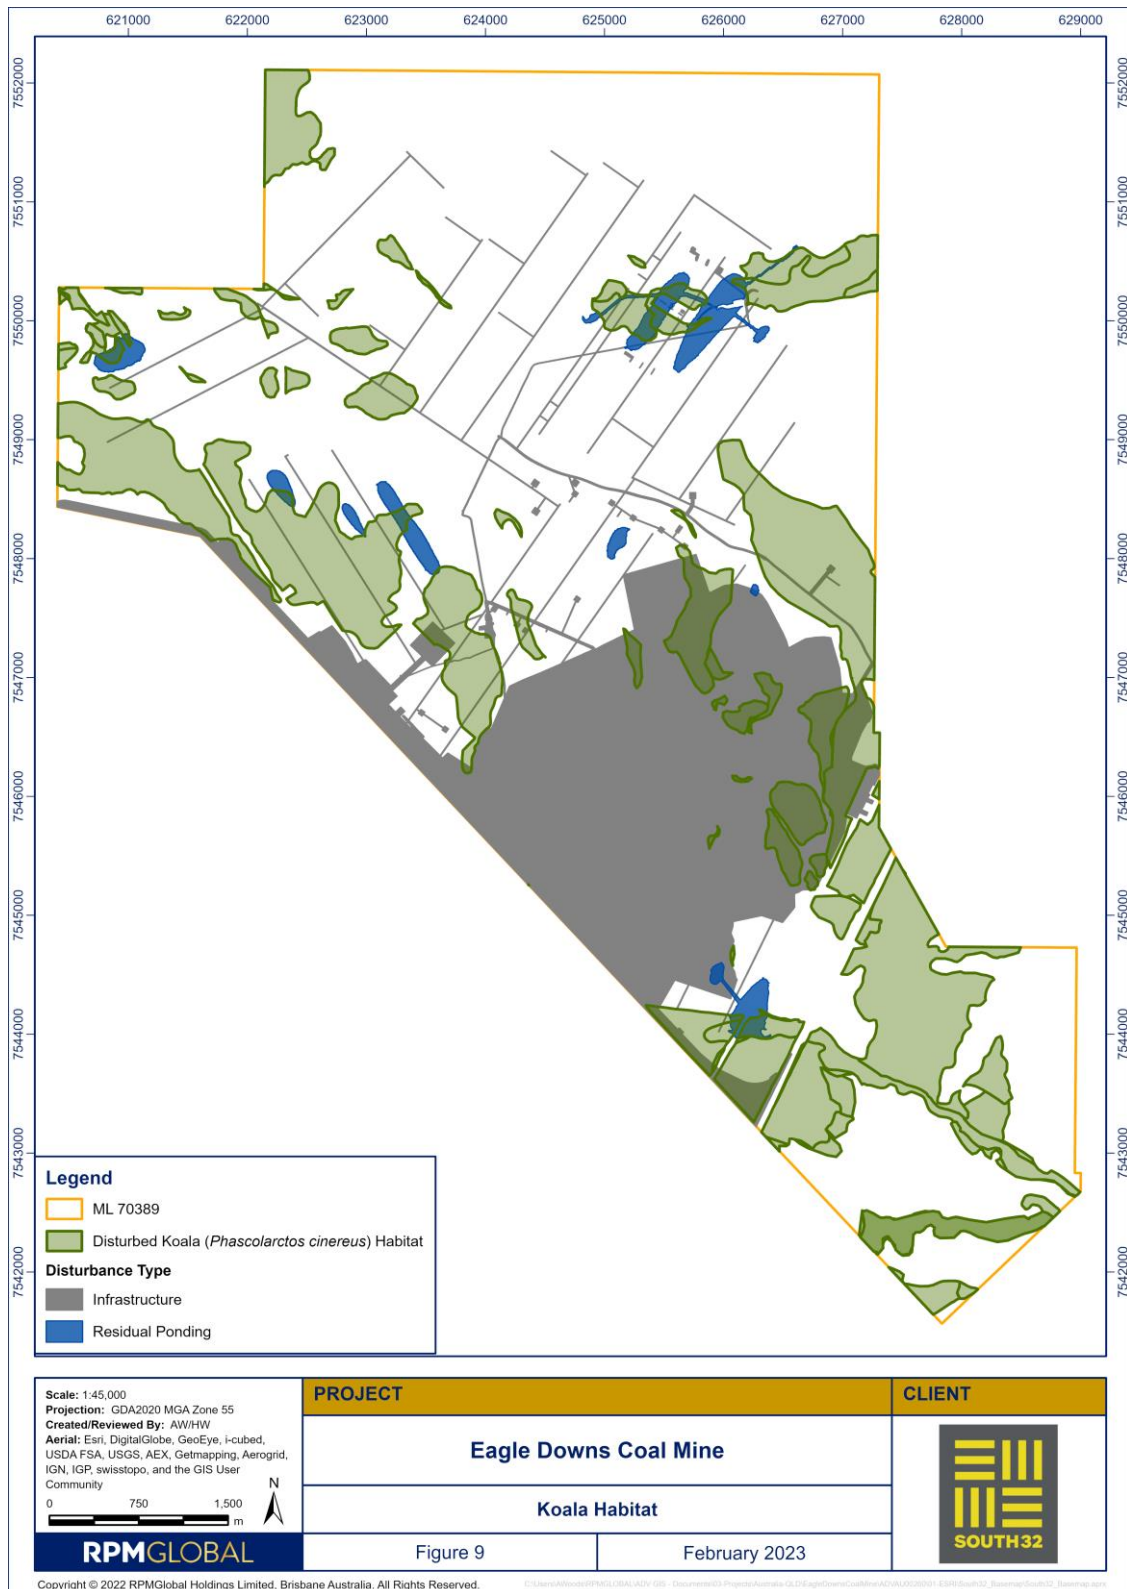


Figure 10 (Prescribed Environmental Matter – Ornamental Snake)

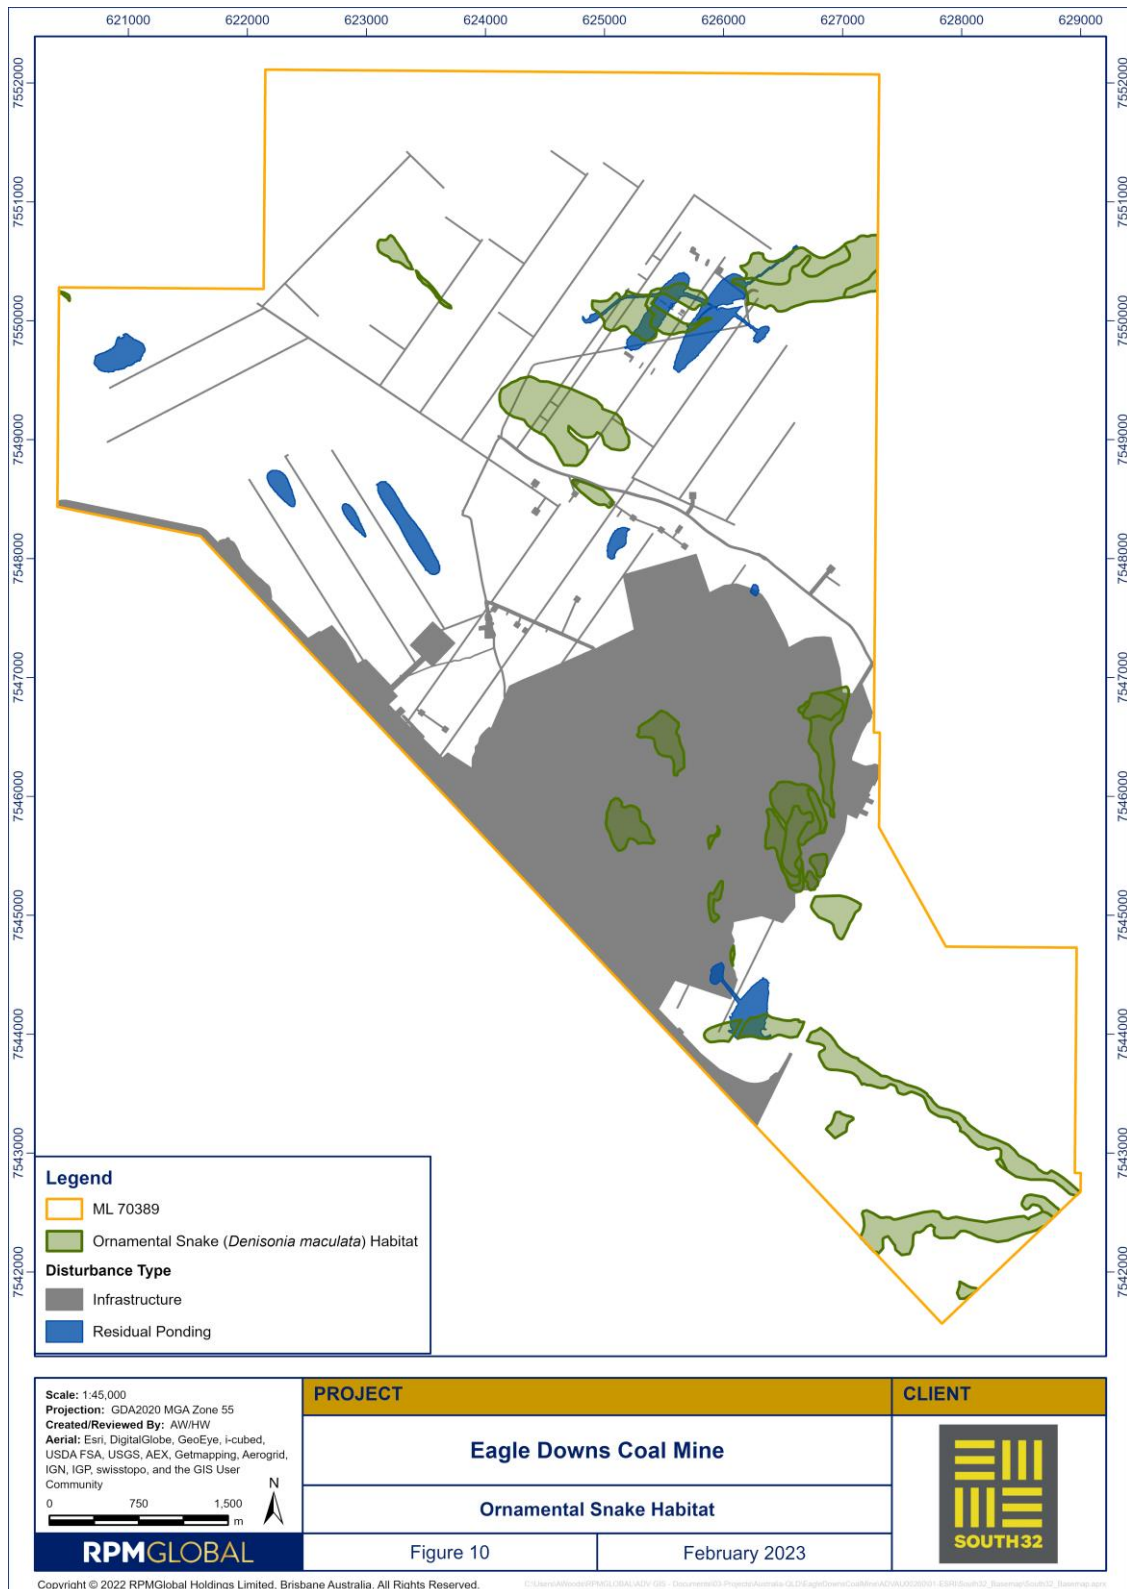

END OF ENVIRONMENTAL AUTHORITY